
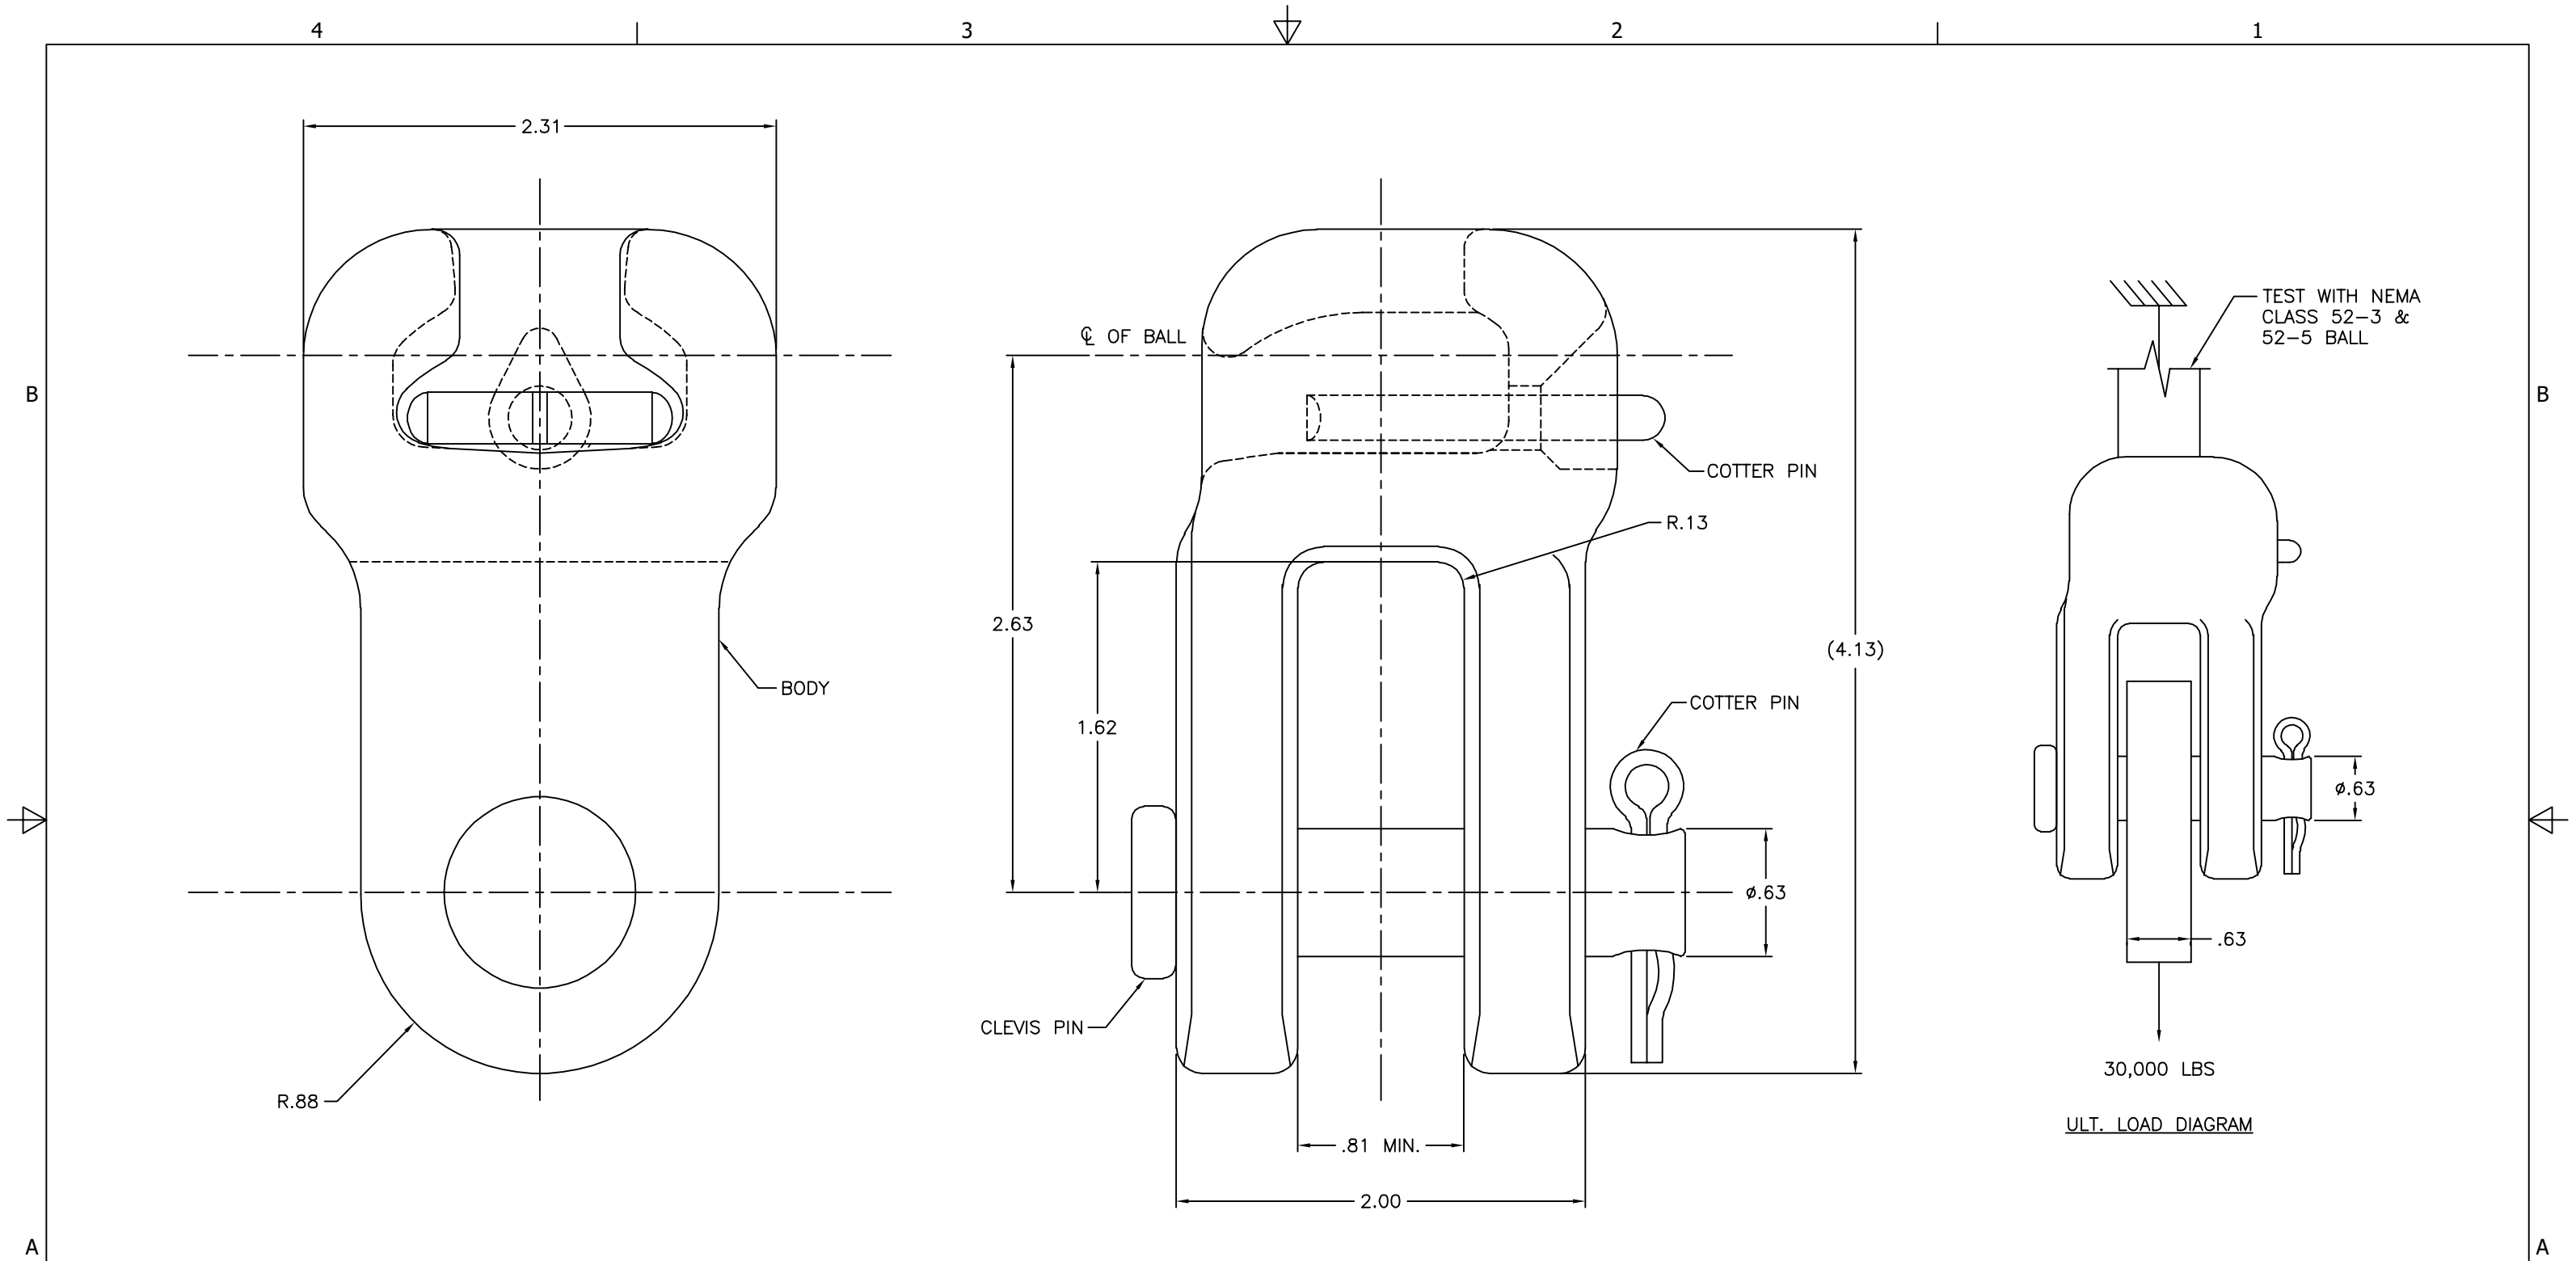




NOTES:

1. MATERIAL: BODY - GALV. DUCTILE IRON
CLEVIS PIN - GALV. STEEL
COTTER PIN - STAINLESS STEEL
2. HOT DIP GALVANIZED PER ASTM A153.
3. DIMENSIONS IN INCHES.
4. FOR USE WITH CLASS 52-3 & 52-5 INSULATORS PER ANSI SPEC. C-29.2.
5. ULTIMATE STRENGTH: 30,000 LBS.
6. WEIGHT: 2.70 LBS APPROX.

--	--	--	LEB	PTB	 HUBBELL® POWER SYSTEMS
EC #	DATE	CHG BY	CKD BY	APPD BY	
DESC OF DWG: DRAWING CREATED IN AUTOCAD					 THIRD ANGLE PROJECTION
--					
-- <u>PRELIMINARY ONLY</u>					
--					
REASON (S) FOR CHANGE: --					CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.
DISPOSITION OF MAT'L: --					
TITLE					
SOCKET CLEVIS 30,000 LBS ULT. STR.					
CATALOG NUMBER: 876032000					
SIZE	DWG NO.	PART / ASSY NO.		REV	
B	CUTSHEET	--		A	
SCALE: NS		DRN BY: KD	DATE: 05/28/20	SHEET 1 OF 1	

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.