HUBBELL PCORE ELECTRIC

kV CLASS 25 kV	**BIL** 150 kV	**Uy** 16 kV
CURRENT RATING		
1200 AMP BOTTOM CONNECTION		
MIN. CREEP 31.00 [787.4]	**MIN. STRIKE** 13.00 [330.2]	
CREEP/L-G 2.15 [54.6]	**STD.** IEEE C57.19.00/01	
PCB CONTENT OF OIL IS LESS THAN 1 ppm		

DWG.	**CATALOG NUMBER**	**GLAZE COLOR**
SD	B-89211-69	BROWN
SD	B-89211-69-70	LT. GRAY

TITLE

PRC BUSHING

2.63 [66.7] LONGER BELOW FLANGE

DATE 7-16-21	**REV. DATE**
MAXIMUM ALTITUDE 10000 ft [3000 m]	
NET WEIGHT 65 lb [30 kg]	
ANGLE OF INCLINATION FROM THE VERTICAL 0° TO 70°	

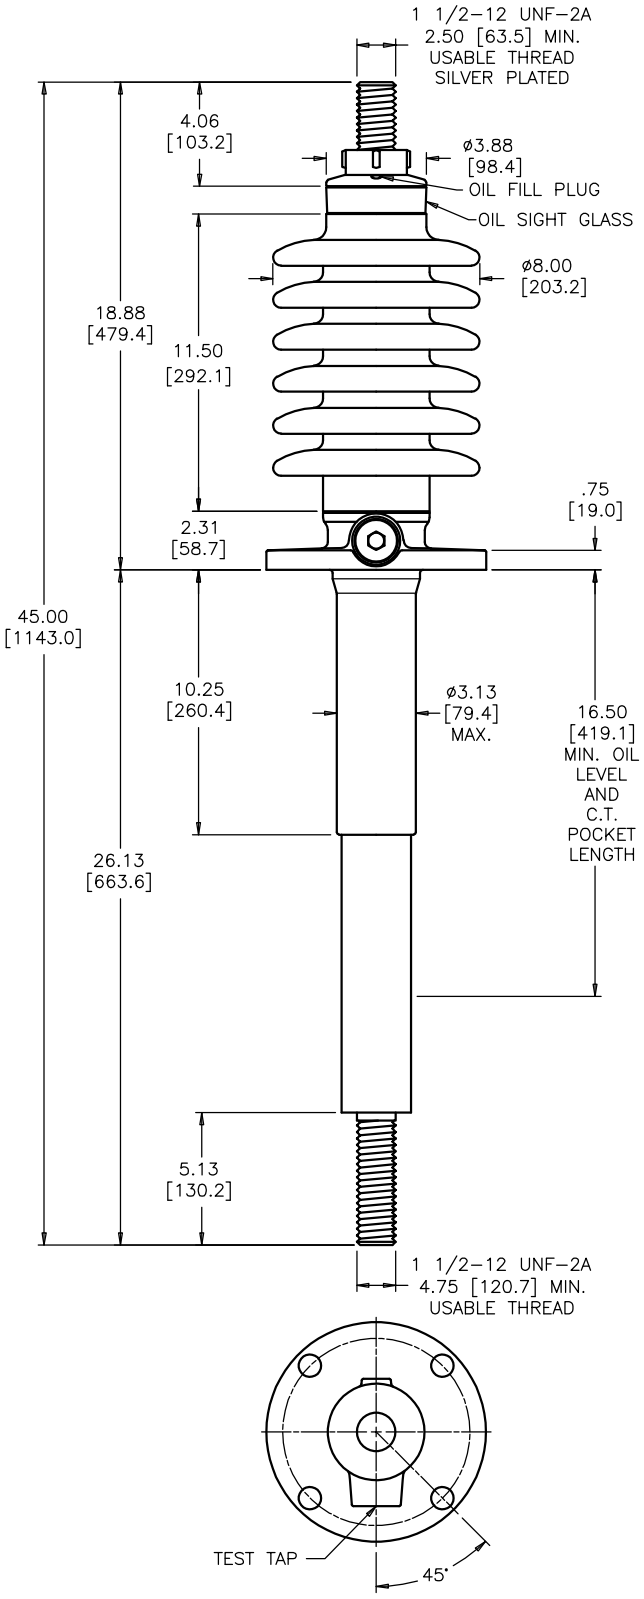

FLANGE ALIGNMENT DIAGRAM
TOP VIEW

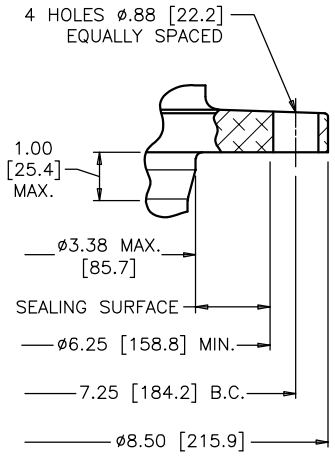

MOUNTING FLANGE DETAIL

DIMENSIONS IN INCHES [MILLIMETERS]

REVISION	**SCALE** 1/5

NOTE TO PURCHASER:
ALL SALES OF PCORE PRODUCTS ARE SUBJECT TO OUR STANDARD TERMS AND CONDITIONS AND THE LIMITED WARRANTIES THEREUNDER