HUBBELL PCORE ELECTRIC

kV CLASS 34.5 kV	**BIL** 200 kV	**Uy** 22 kV
CURRENT RATING 400 AMP DRAW LEAD CONNECTION		
MIN. CREEP 41.00 [1041.4]	**MIN. STRIKE** 17.00 [431.8]	
CREEP/L-G 2.06 [52.3]	**STD.** IEEE C57.19.00/01	
PCB CONTENT OF OIL IS LESS THAN 1 ppm		

DWG.	**CATALOG NUMBER**	**GLAZE COLOR**
SD	B-89301-15-44	BROWN
SD	B-89301-15-44-70	LT. GRAY

TITLE PRC BUSHING

CURVED DRAW LEAD TERMINAL
1 1/2 -12 TOP THREAD

DATE 10-21-13	**REV. DATE** 4-6-20
MAXIMUM ALTITUDE 10000 ft [3000 m]	
NET WEIGHT 55 lb [25 kg]	
ANGLE OF INCLINATION FROM THE VERTICAL 0° TO 70°	

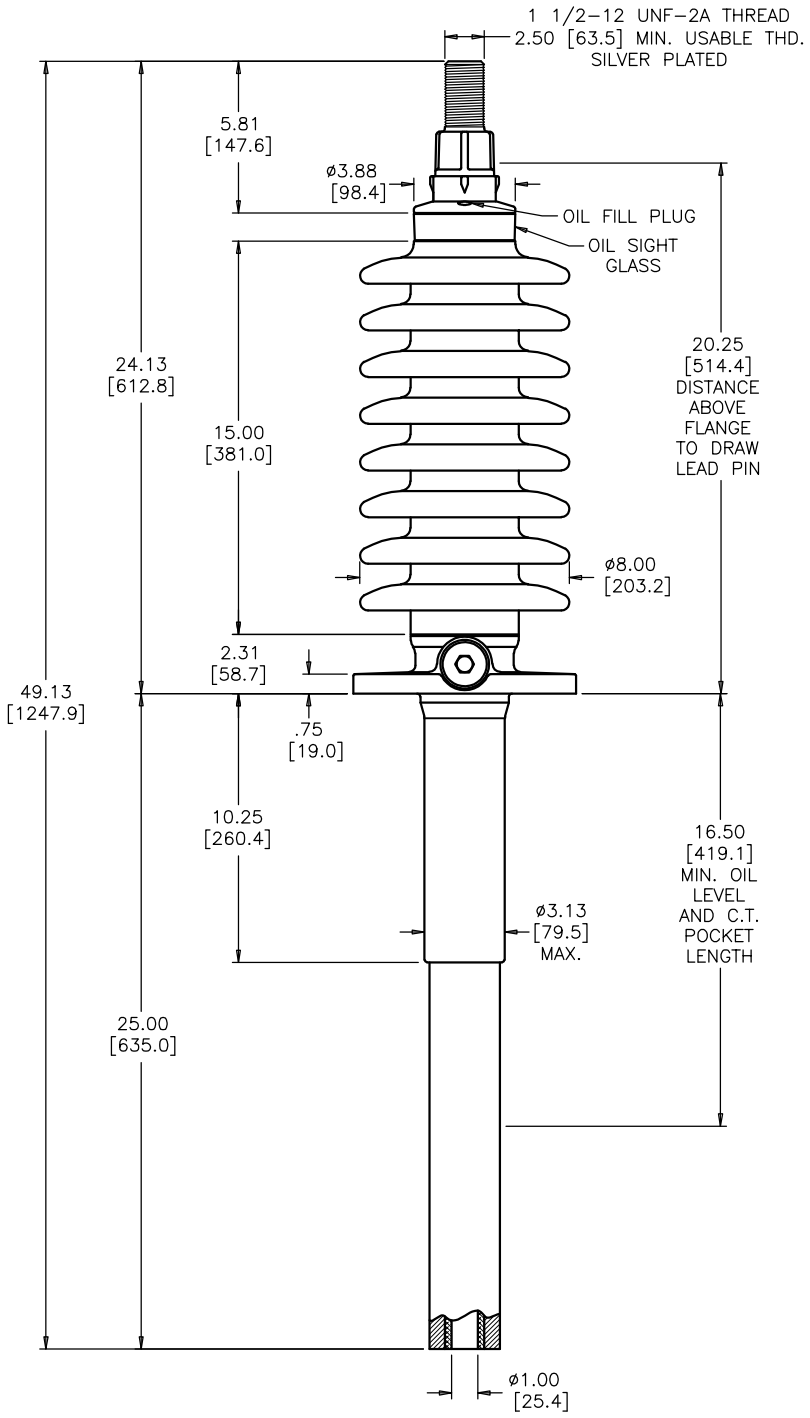

NOTE: ADDED DRAW-LEAD CURRENT RATING IS DETERMINED BY CABLE SIZE

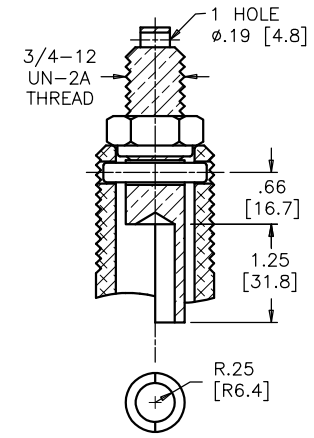

CURVED DRAW LEAD ASSEMBLY

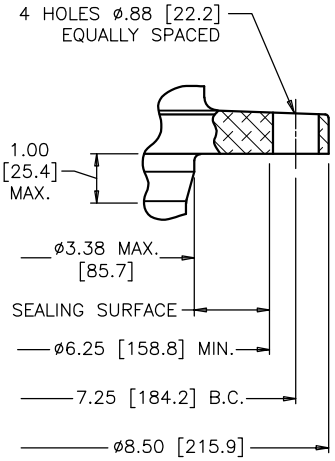

MOUNTING FLANGE DETAIL



FLANGE ALIGNMENT DIAGRAM
TOP VIEW

DIMENSIONS IN INCHES [MILLIMETERS]

REVISION NET WEIGHT WAS 51 lbs	**SCALE** 1/5

NOTE TO PURCHASER:
ALL SALES OF PCORE PRODUCTS ARE SUBJECT TO OUR STANDARD TERMS AND CONDITIONS AND THE LIMITED WARRANTIES THEREUNDER