





LAPP INSULATOR Co.
BUSHING DIVISION
LEROY, N.Y. 14482


TITLE
PRC BUSHING
SOLDER TEST TAP CONNECTION
SILVER PLATED BOTTOM TERMINAL
TEST STANDARD IEEE
NET WEIGHT 50 lbs. (23 kg.)
ANGLE INCLINATION FROM VERTICAL = 0° TO 70°

DWG.	CATALOG NUMBER	UPPER PORCELAIN GLAZE COLOR
SD	B89122-103	CHOCOLATE
SD	B89122-103-70	LT. GRAY No.70
CURRENT RATING		
2000 AMP BOTTOM CONNECTED @ 95°C MAX. OIL TEMPERATURE		

DWG. DATE	12-21-96	REV. DATE	
MIN. CREEP	21.00 (533)	kV CLASS	15 kV
CREEPAGE PER Uy	2.10 (53)	Uy	10 kV
MIN. STRIKE DIST.	10.00 (254)	BIL	110 kV

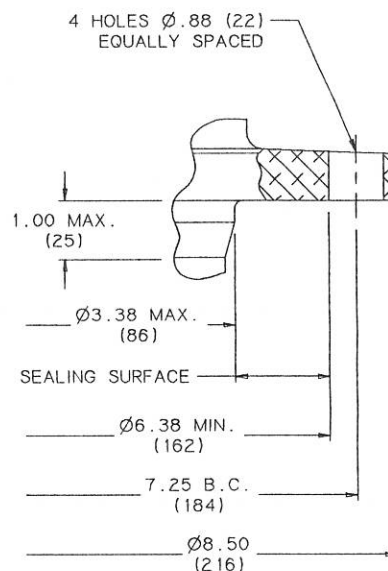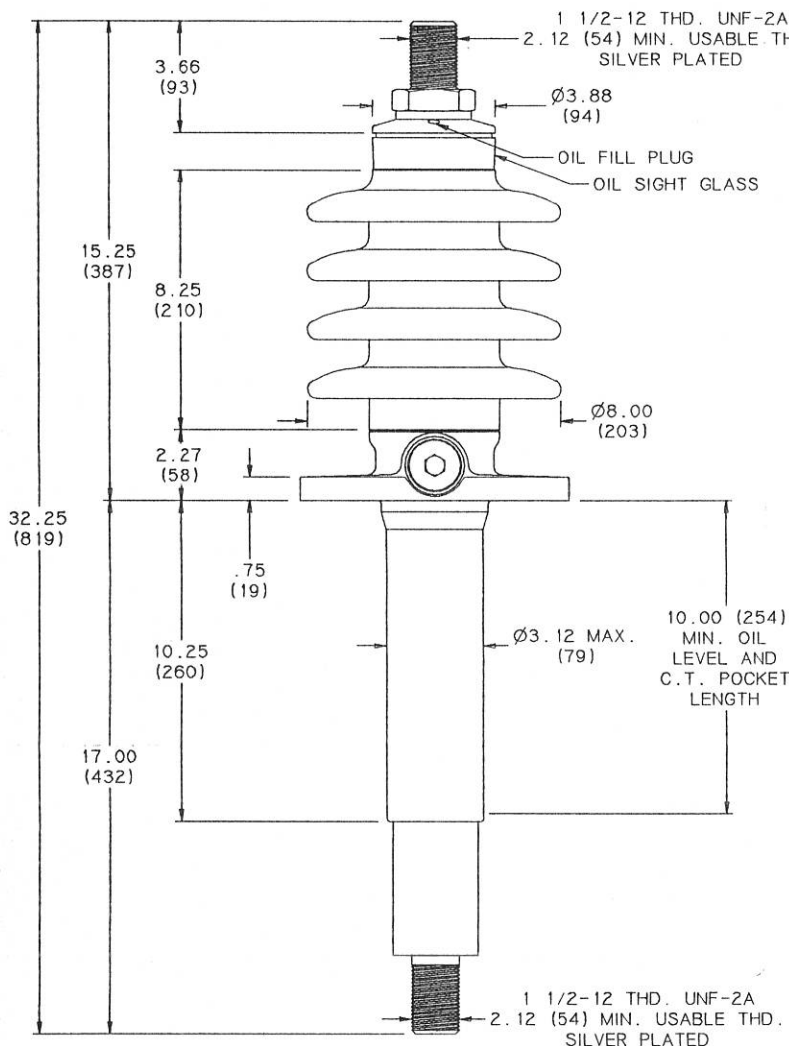

MOUNTING FLANGE DETAIL

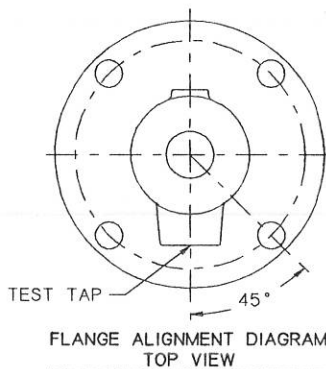

Bk. No. 7A2A

LAST REVISION

DIMENSIONS IN INCHES (MILLIMETERS)

NOTE TO PURCHASER
ALL SALES OF LAPP PRODUCTS ARE
SUBJECT TO OUR STANDARD TERMS
AND CONDITIONS AND THE LIMITED
WARRANTIES THEREUNDER