


Post	P250555S0390	1
Suspension	S025056S0000	1
Anchor Shackle	AS-50	2
Part Number		Qty

REV DATE 02/04/10

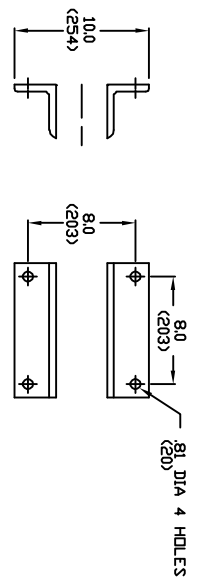

MOUNTING BASE DETAIL

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH ANSI C2911-1989

DRY 60 HZ FLASHOVER	525
WET 60 HZ FLASHOVER	470
IMPULSE POSITIVE FLASHOVER	805
IMPULSE NEGATIVE FLASHOVER	855

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH IEC-60383

WET 60 HZ 1-MIN WITHSTAND	350
IMPULSE POSITIVE WITHSTAND	720
IMPULSE NEGATIVE WITHSTAND	765

MAX WORKING LOADS, LBS(KN)

VERTICAL	10310 (458)
TRANSVERSE TENSION	7500 (33.3)
COMPRESSION	7500 (33.3)
LONGITUDINAL	7500 (33.3)
LEAKAGE DISTANCE	143
STRIKE DISTANCE	52.6

CONFERENTIAL THE DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE. ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

HUBBELL POWER SYSTEMS

TITLE: QUADRI SIL BRACED LINE POST ASSY

SIZE: B

DWG NO: BLP055P00000

DATE / PART / ASSY NO: 03/31/08

DEN BY: JVR

DATE: 03/31/08

SHEET 1 OF 1