


Post	P250080S0390	1
Suspension	S025081S000A	1
Anchor Shackle	AS-50	2
Part Number	Qty	

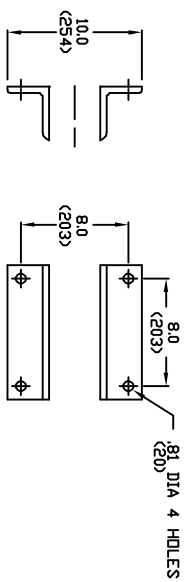

MOUNTING BASE DETAIL

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH ANSI C2911-1989

DRY 60 HZ FLASHOVER	735
WET 60 HZ FLASHOVER	635
IMPULSE POSITIVE FLASHOVER	1145
IMPULSE NEGATIVE FLASHOVER	1245


ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH IEC-60383

WET 60 HZ 1-MIN WITHSTAND	475
IMPULSE POSITIVE WITHSTAND	1030
IMPULSE NEGATIVE WITHSTAND	1120

MAX WORKING LOADS, LBS(KN)

VERTICAL	10150 (45.1)
TRANSVERSE TENSION	7500 (33.3)
COMPRESSION	7500 (33.3)
LONGITUDINAL	7500 (33.3)
LEAKAGE DISTANCE	208
STRIKE DISTANCE	74.2

REV DATE 02/04/10


HUBBELL POWER SYSTEMS
 TITLE: QUADRI SIL BRACED LINE POST ASSY
 SIZE: B
 DWG NO: BLP080P00000
 CAT / PART / ASSY NO: BLP080P00000
 DWN BY: JVR
 DATE: 03/31/08
 SHEET 1 OF 1

CONFIDENTIAL THE DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE PROPERTY OF HUBBELL POWER SYSTEMS. NO REPRODUCTION, DISTRIBUTION OR USE FOR ANY OTHER PURPOSE IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF HUBBELL POWER SYSTEMS. UNAUTHORIZED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.