
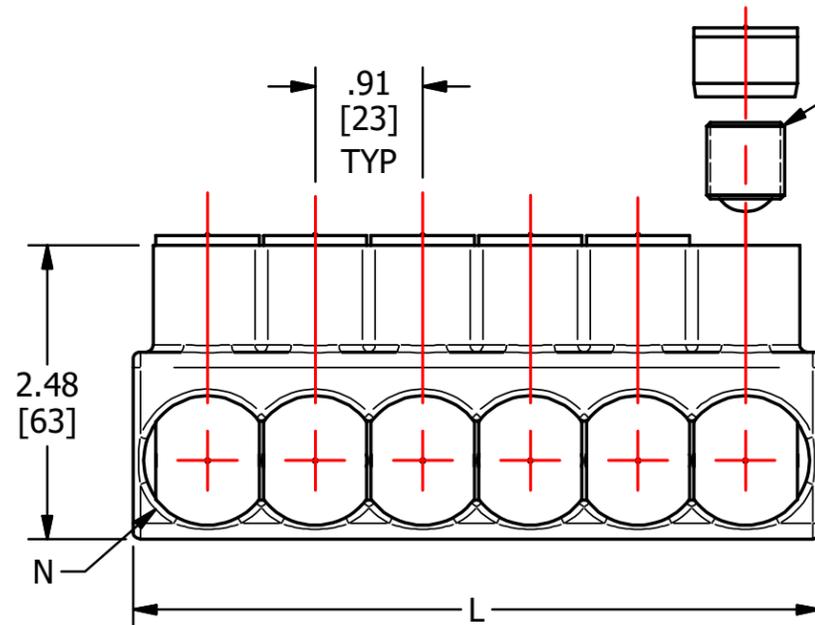
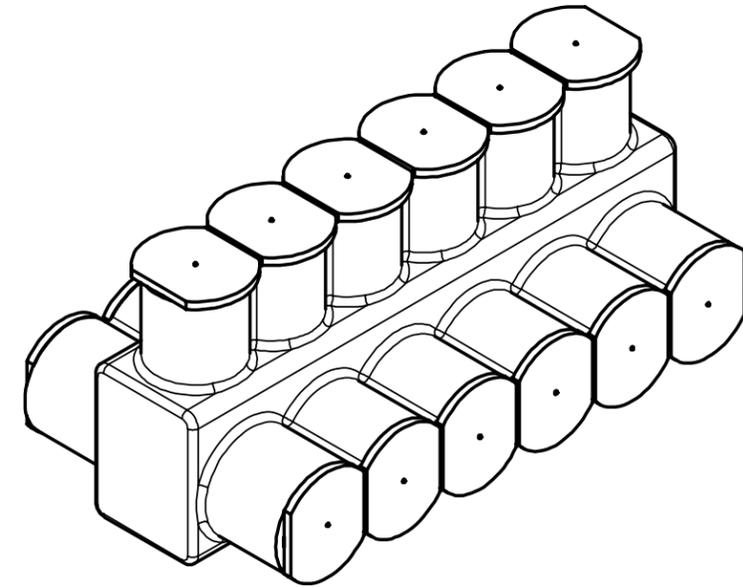
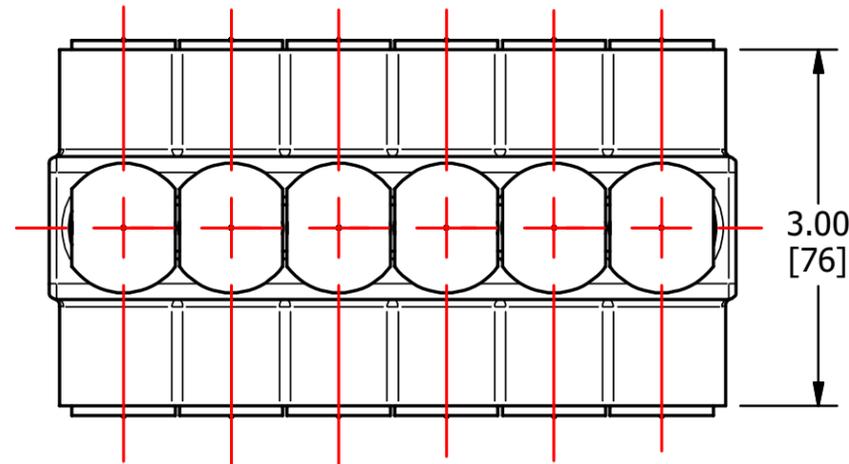


S.NO	CATALOG NUMBER	L	N
1	NACC350-2B	1.97 [50]	2
2	NACC350-5B	4.70 [119]	5
3	NACC350-6B	5.61 [142]	6



SCREWS ARE SUPPLIED WITH CONNECTOR AND COMES FULLY ASSEMBLED.

- CMC FLEX TAP IS AVAILABLE IN TWO THROUGH EIGHT CONDUCTOR CONFIGURATIONS IN FIVE CONDUCTOR SIZES.
- CONNECTOR FABRICATED FROM 6061-T6 ALUMINIUM ALLOY FOR CONDUCTIVITY AND STRENGTH.
- CONNECTOR IS ENCAPSULATED IN CLEAR PVC RATED AT 240 VOLTS PER MIL.
- CLEAR COVER ALLOWS VISUAL INSPECTION OF CONDUCTORS DURING INSTALLATION.
- FULLY TESTED TO ANSI C119.4 FOR CLASS 'A' CONNECTORS.
- CONDUCTOR RANGE: 350 KCMIL - #12 AWG

					TO ORDER CMC PRODUCTS	DRAWN BY: TS	NAME OF PART:	CAT. NO.:
					UNITED STATES 1-513-860-4455	08-26-20	ENCAP. BAR ASSEMBLY	SEE TABLE
					CANADA 1-800-361-6975	CHECKED BY:	DWG NO:	A
					MEXICO 011-52-722-265-4400		C17298076-S (CHARTED)	
A	NEW DRAWING CREATED		08-26-20	TS	FOR PRODUCT INFO www.cmclugs.com	DRAWING NOT TO SCALE		SHEET NO: 1 OF 1
REV.	DESCRIPTION	ECN	DATE	INIT.				

THIS INFORMATION IS PROPRIETARY TO CONNECTOR MFG. CO. AND IS NOT TO BE DISCLOSED OUTSIDE OF CONNECTOR MFG. CO. WITHOUT A CONFIDENTIALITY AGREEMENT



CONNECTOR MANUFACTURING CO.

HAMILTON, OHIO