


CATALOG NUMBER	DIMENSIONS			TENSION RANGE	DEFLECTION RATE (LBS)
	A	B	C		
SBA-5/8-3-17.25	17.25	9.00	2.50	0-3000 LBS	1500 [#] PER INCH
SBA-5/8-3-22.75	22.75	9.00	2.50	0-3000 LBS	1500 [#] PER INCH
SBA-5/8-6-17.25	17.25	11.25	3.75	0-6000 LBS	3000 [#] PER INCH
SBA-5/8-6-24.75	24.75	11.25	3.75	0-6000 LBS	3000 [#] PER INCH
SBA-5/8-3-46	46.00	9.00	2.50	0-3000 LBS	1500 [#] PER INCH
SBA-5/8-6-36	36.00	11.25	3.75	0-6000 LBS	3000 [#] PER INCH
SBA-5/8-3-36	36.00	9.00	2.50	0-3000 LBS	1500 [#] PER INCH
SBA-5/8-3-70	70.00	9.00	2.50	0-3000 LBS	1500 [#] PER INCH
SBA-5/8-6-30	30.00	11.25	3.75	0-6000 LBS	3000 [#] PER INCH

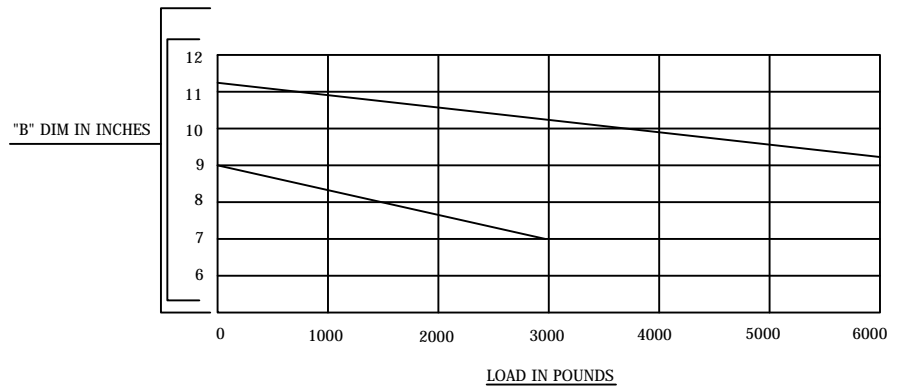

QR-2858

62341	9-21-15	KMK	KMK	HPS.	HUBBELL® POWER SYSTEMS
EC #	DATE	CHG BY	RESP ENG		
DESC OF DWG: REDRAW IN AUTOCADD				CONFIDENTIAL: THIS DRAWING AND ITS CONTACTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	TITLE SPRING BOLT ASSEMBLY
REASON (S) FOR CHANGE: DISPOSITION OF MAT'L:					SIZE C DWG NO. CC-11975 CAT / PART / ASSY NO. SEE TABLE REV 12
				DO NOT SCALE THIS DRAWING	DRN BY AH DATE 4-14-81 SHEET 1 OF 1