
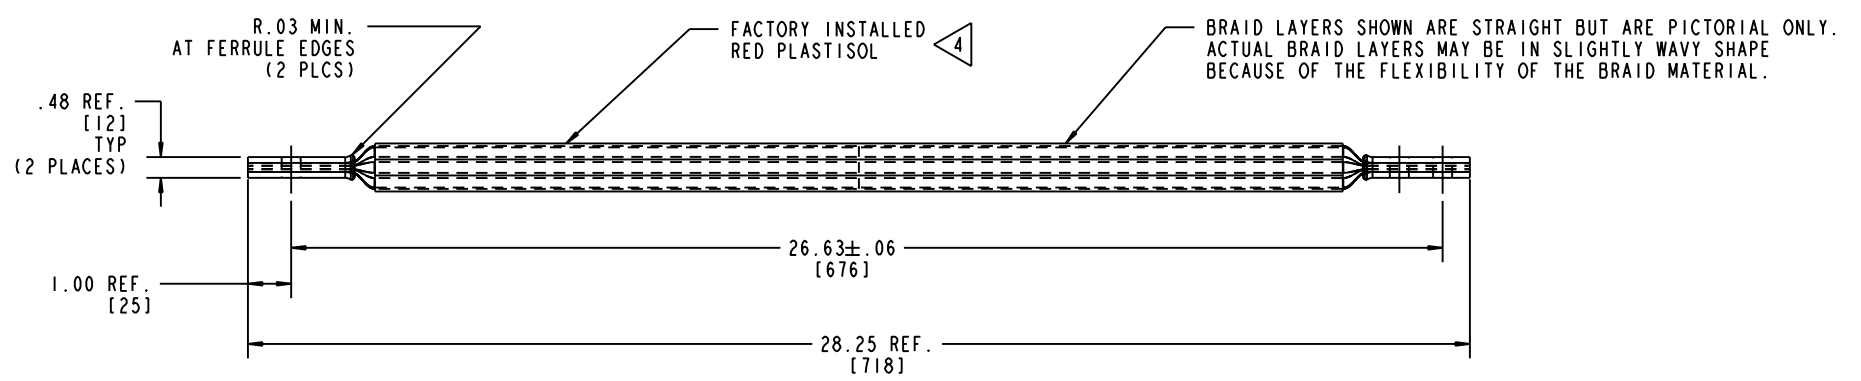


DRAWING NO.
CSC34973-01

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	11/28/2007 4:25:00 PM	UPDATED WITH NEW FORMAT	14544	RLB	PRL

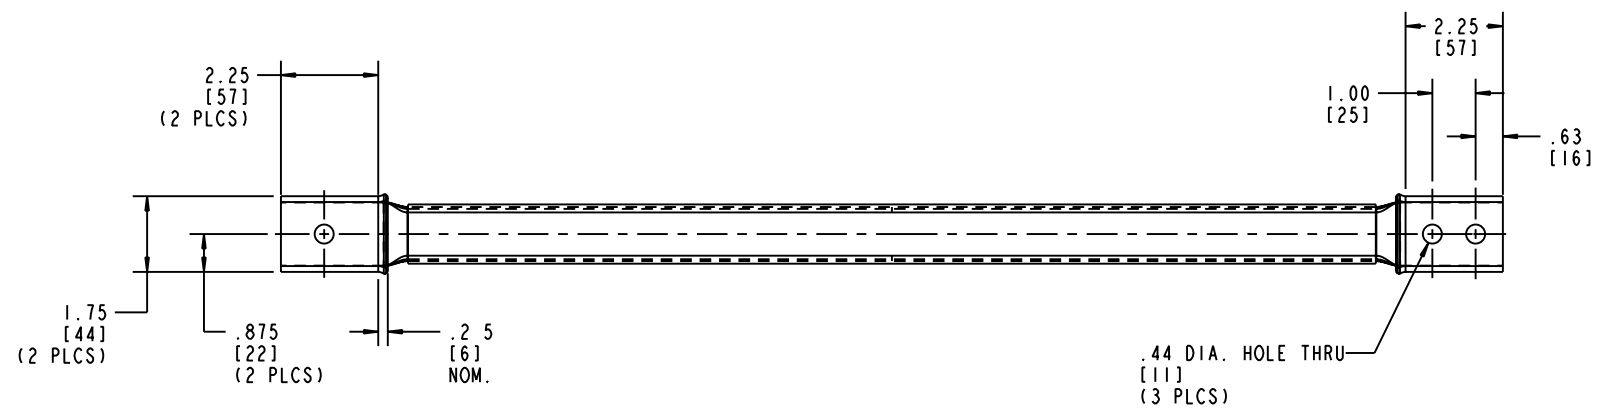

NOTES:

- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
- MATERIAL:
FERRULES - BARE COPPER
BRAID - TIN-PLATED COPPER
INSULATION - RED PLASTISOL
- AMPACITY (30°C TEMP. RISE)
INDOOR - 700 AMP
OUTDOOR - 840 AMP
OR
800 AMP INDOOR @ 40°C TEMP. RISE

4 RED PLASTISOL INSULATION IS SUITABLE FOR 600 VOLTS APPLICATION.

TO ORDER BURNDY PRODUCTS CALL 1-800-346-4175 MANCHESTER, NH 03109, USA FOR PRODUCT INFO = http://www.fciconnect.com			
BRAID ASSEMBLY			
ITEM NO: 10043592			
CAT. NO: B3E28D25CG1			
DRAWN BY: ALEN P.	07/29/94	BURNDY PRODUCTS	
CHECKER: PW	07/29/94		
DSN APPVL: W. ZAHLMAN	06/11/07		
MFG APPVL: --	--		
QA APPVL: J. BRODEUR	06/11/07		
MKT APPVL: --	--	SCALE: 0.375	
PROD FAM: --		DRAWING NO	REV
PROJECT #: --	SIZE	CSC34973-01	A
DOCUMENT TYPE: --	C	SHEET 1 OF 1	
REL LEVEL: Released			

REV: PED200