


ITEM	DESCRIPTION	MATERIAL					
1	MALE CASTING	SILICON BRONZE (EVERDUR) CDA 87300					
2	FEMALE CASTING	SILICON BRONZE (EVERDUR) CDA 87300					
3	5/16 WASHER	STAINLESS STEEL					
4	5/16-24 BOLT	STAINLESS STEEL					

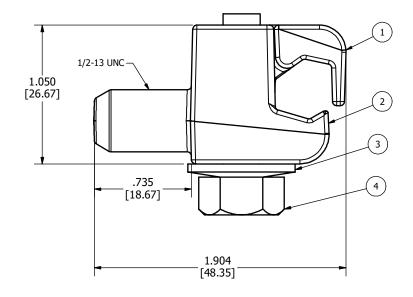





## NOTES:

- 1. ALL DIMENSIONS FOR REFERENCE ONLY. DISTANCE IN. [MM], FORCE LBS. [kN], TORQUE IN. LBS. [N.m], & WEIGHT LBS. [KG].
- 3. CONDUCTOR RANGE: .#4 AWG (DIA 0.204 [5.189]) MIN 2/0 AWG (DIA 0.324 [8.252mm] MAX

-	20-09-2023	RHR	SP	SP			HUBBE	® HIII	RRFII DOW	ER SYSTEMS,	Inc 📶	111
EC#	DATE	CHANGED BY	CHECKED BY	APPROVED BY	_		POWER SYSTE		DDLLL I OVV	LIC STOTEINS,		MOTION CO., INC.
EC DESCRIPTION: WEIGHT (Ibmass)					THIRD ANGLE		TITLE					
			0.	0.246		PROJECTION	GROUND CLAMP					
				CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER		CATALOG NUMBER: EM-892						
						SIZE	DWG NO.		PART / ASSY NO.		REV	
						В		EM-892-CC	EM-892		Α	
ADDITIONAL	ADDITIONAL COMMENTS: SYSTEMS UNPUBLISHE UNDER THE COPYRIGH						SCALE:	NTS	DRN BY: RHR	DATE: 20-09-2023	SHEET 1	. OF 1
								1				