


CONDUCTOR RANGE: .385 IN TO .865 IN (6.8 mm TO 22.0 mm)
 INSTALLATION TORQUE: 25 LB-FT
 NOMINAL WEIGHT: 4.6 LB (2.07 KG)
 FOR "TORQUE HEAD" BOLTS ADD SUFFIX "0"



FARGO®
TOLERANCE CHART

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

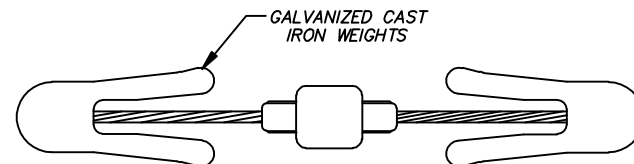

HUBBELL® POWER SYSTEMS

TITLE

60705-10/11
VIBRATION DAMPER

SIZE
A

DWG NO.
F6314000

CAT / PART / ASSY NO.
60705-10/11

REV
01

DO NOT SCALE
THIS DRAWING

DRN BY JLB

DATE 11/6/07

SHEET 1 OF 1