


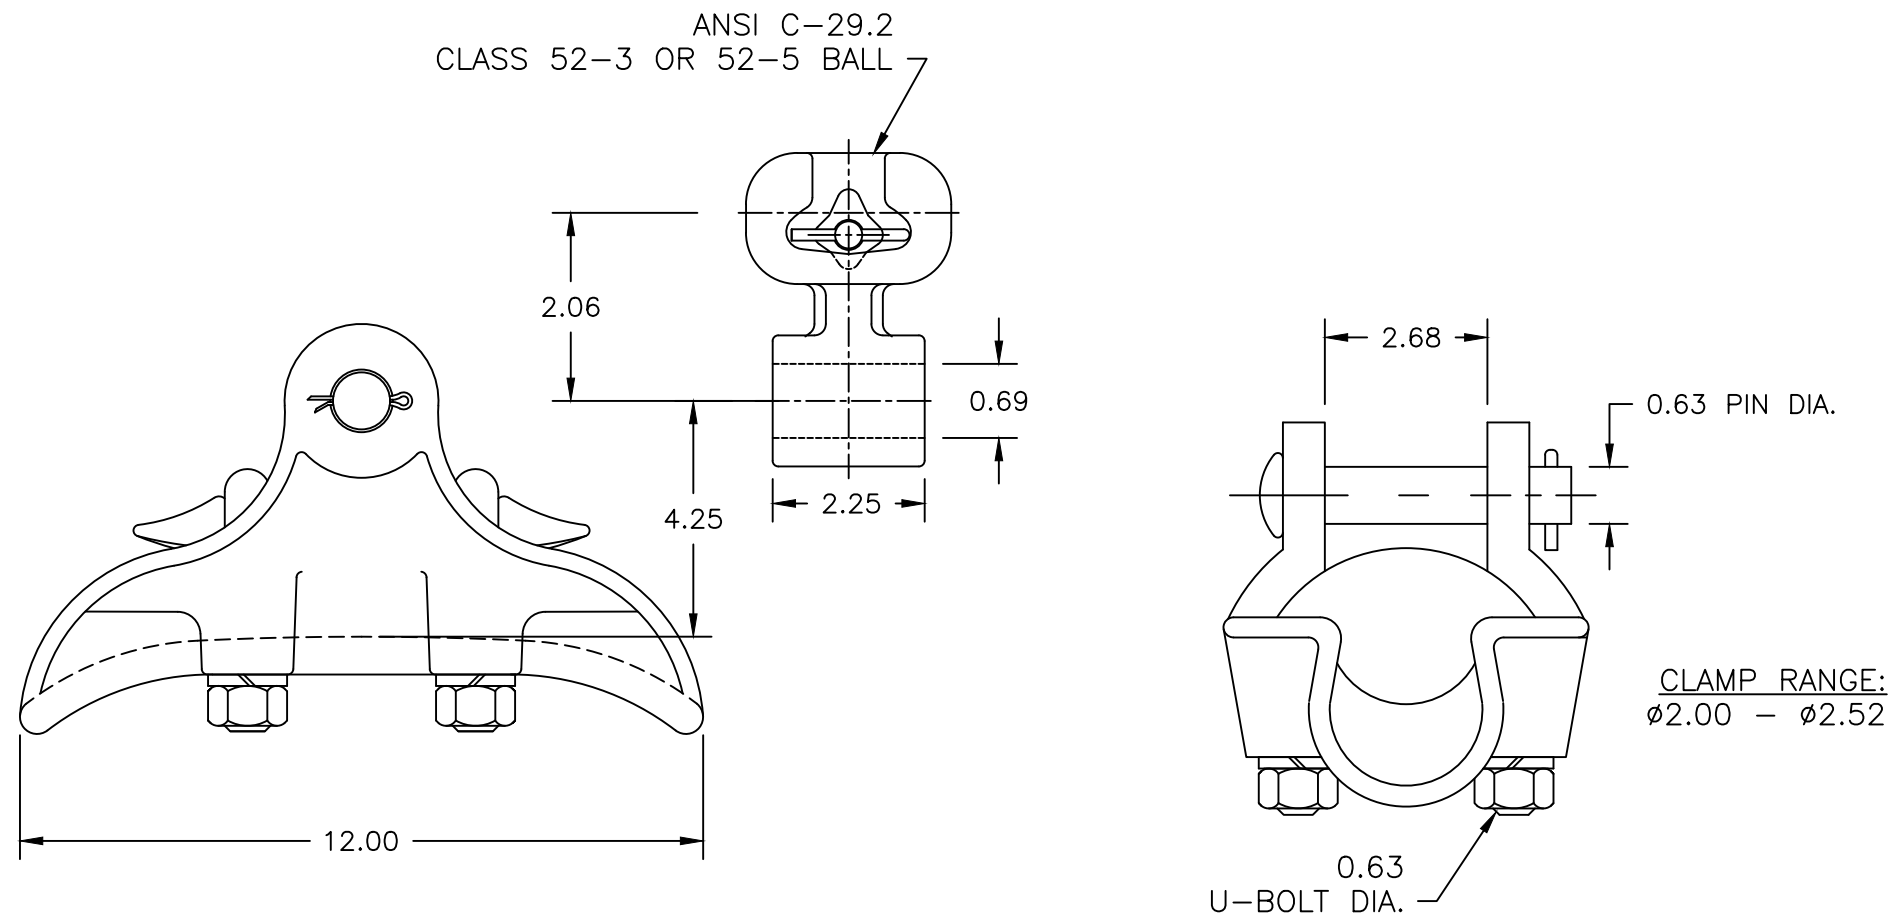

RECOMMENDED TORQUE:
720 IN.-LBS.

- NOTES:
1. MATERIAL: CLAMP BODY & KEEPER: ALUMINUM ALLOY
SOCKET: GALVANIZED DUCTILE IRON
COTTER PIN: STAINLESS STEEL
CLEVIS PIN, U-BOLTS, NUTS, WASHERS: GALV. STEEL
 2. DIMENSIONS IN INCHES.
 3. WEIGHT: 10.8 LBS.
 4. 30,000 LBS. ULTIMATE STRENGTH

--	--	--	--	ANDERSON TOLERANCE CHART	 HUBBELL® POWER SYSTEMS			
EC #	DATE	CHG BY	RESP ENG					
DESC OF DWG: -- -- -- -- REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L: --				CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	TITLE SUSPENSION CLAMP WITH SOCKET			
					SIZE B	DWG NO. CUTSHEET	CAT / PART / ASSY NO. HAS-252-S	
				DO NOT SCALE THIS DRAWING	DRN BY MWA	DATE 3/4/11	SHEET 1 OF 1	