


ITEM NO.	DESCRIPTION	QTY.
1	SC CONNECTOR DUST CAP	2
2	SC CONNECTOR BODY	2
3	SC DUPLEX CLIP	1
4	1.8mm SC CONNECTOR BOOT	2
5	1.8mm DUPLEX CABLE	A/R
6	1.8mm ST CONNECTOR BOOT	2
7	ST CONNECTOR NUT	2
8	ST CONNECTOR DUST CAP	2

CATALOG NO.	DESCRIPTION	LENGTH	CABLE JACKET COLOR	CONNECTOR HOUSING COLOR
DPCSTSCDMM	MULTIMODE ST-SC DUPLEX 50/125um OM2 CORD	x METER	ORANGE	BEIGE
DPCSTSCXMM	MULTIMODE ST-SC DUPLEX 50/125um OM3 CORD	x METER	AQUA	BEIGE

"x" = 1 THRU 25 ("LENGTH")

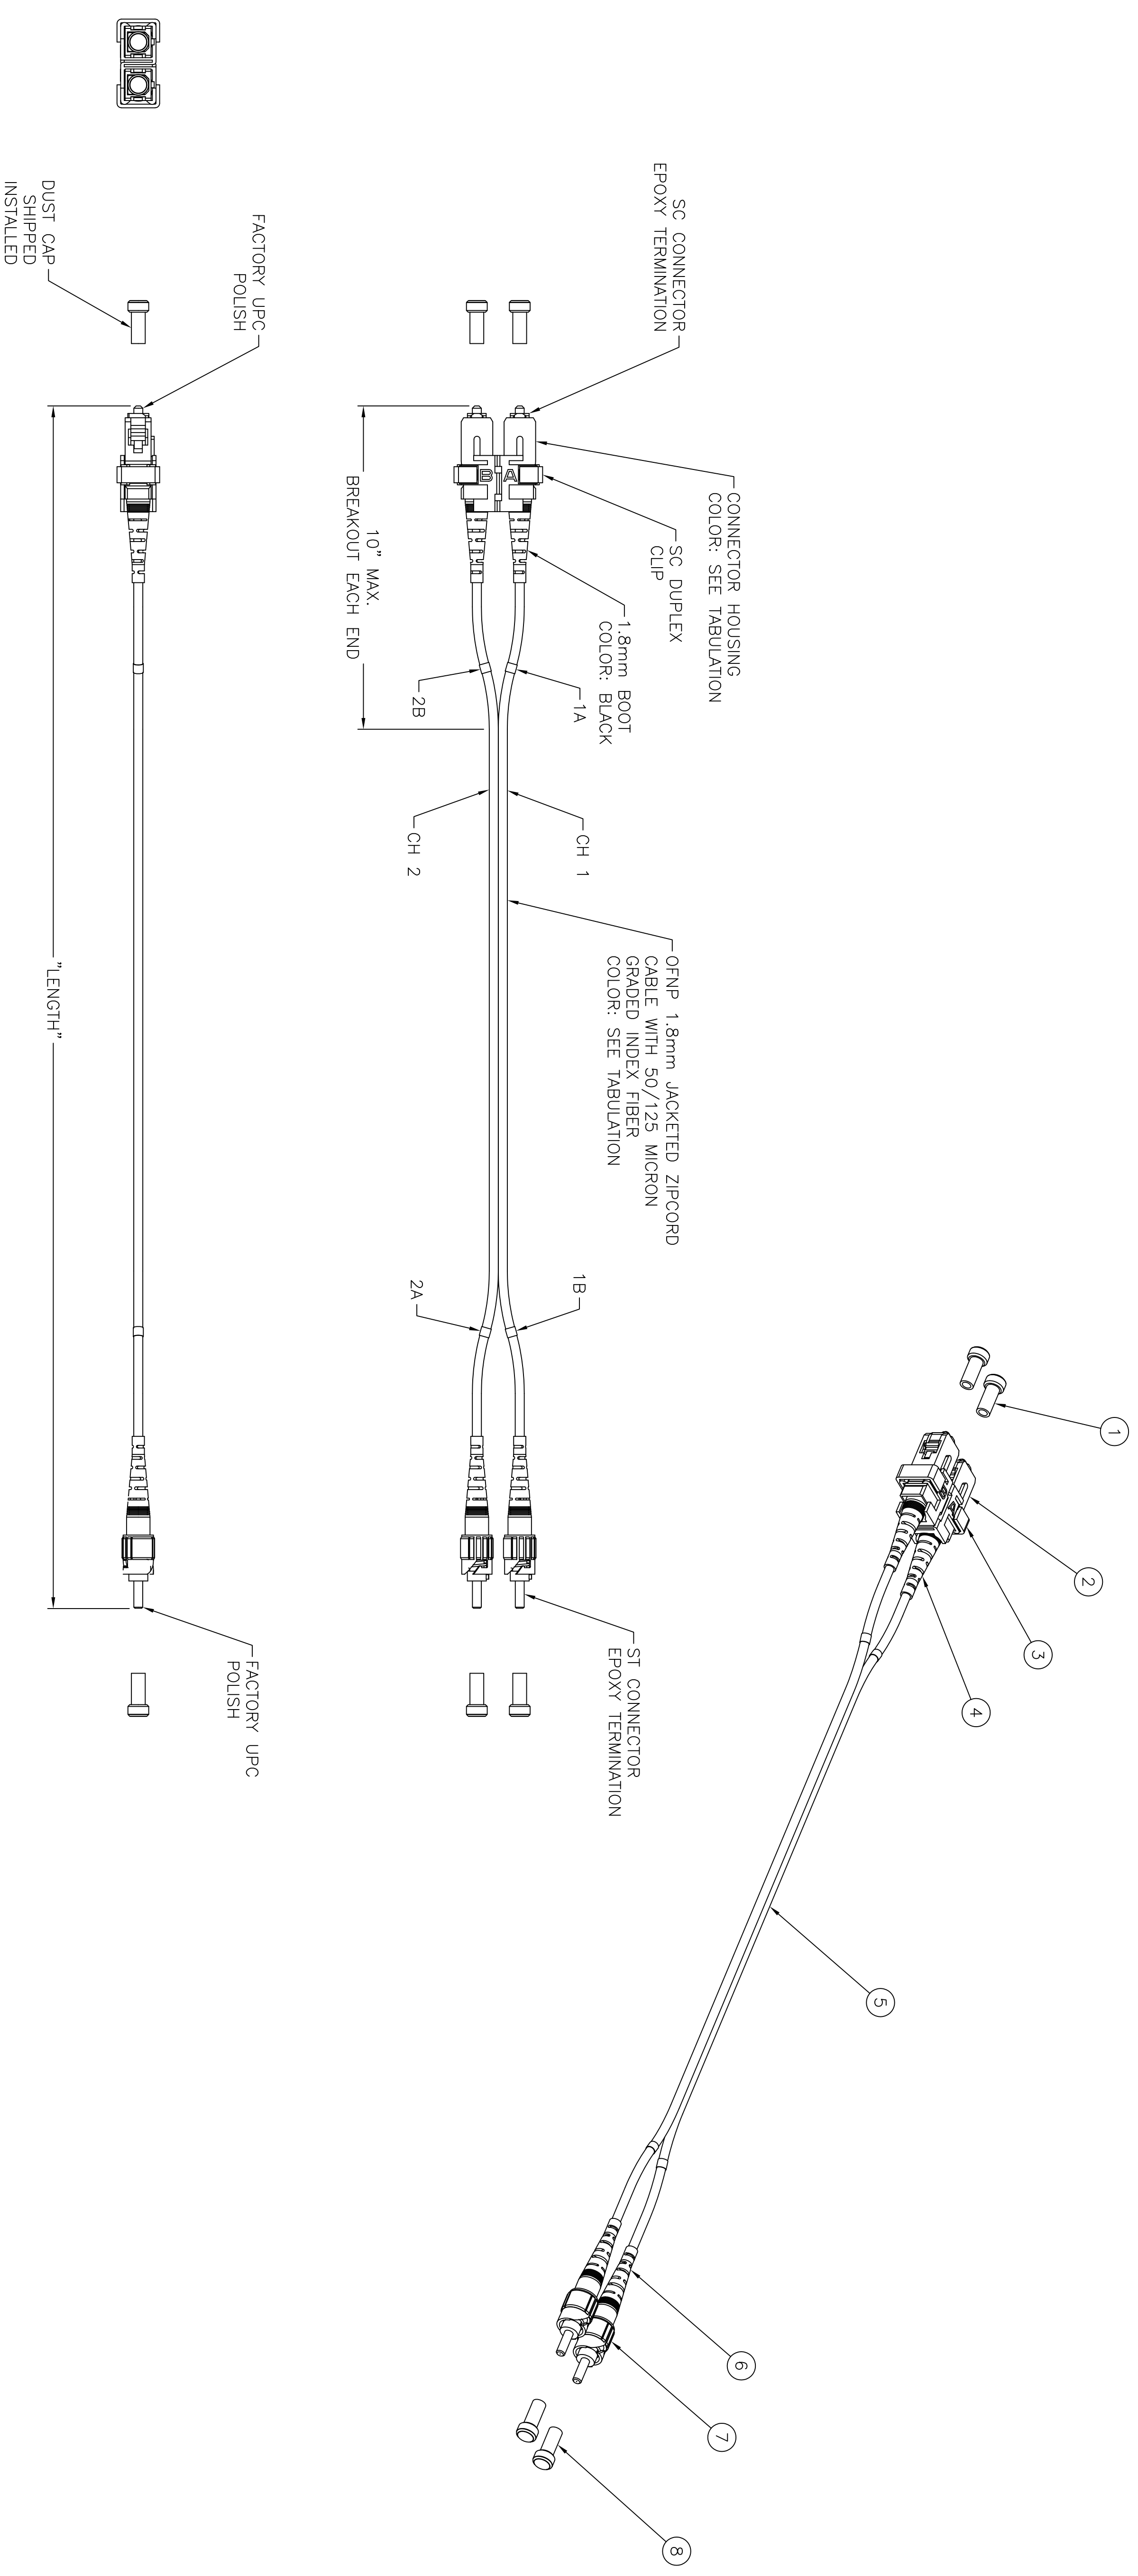

NOTES:

- CONNECTOR OPTICAL, MECHANICAL AND ENVIRONMENTAL PERFORMANCE MEETS TIA/EIA-568-C.3 SPECIFICATIONS.
- CONNECTOR USES A PC RADIUS TIP ZIRCONIA CERAMIC FERRULE.
- SC CONNECTOR HOUSING IS INJECTION MOLDED ENGINEERING PLASTIC. RESIN, ST CONNECTOR NUT IS NICKEL PLATED ZINC DIE CAST.
- OPTICAL INSERTION LOSS TEST DATA INCLUDED IN EACH BAGGED PATCH CORD.
- CABLE MARKINGS TO IDENTIFY CHANNEL (1 OR 2) AND EACH END (A OR B).
- SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

REV.	EGN	DATE	DESCRIPTION	CHG BY	APPD BY
C	18030	01/11/13	REVISED CABLE TO PLENUM: ADDITIONAL LENGTHS	MMA	

Created on AUTOCAD		DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1992 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM). .XX = ±.01 (.25) .XXX = ±.005 (.127) XXXX = ±.0025 (.0635) ANGLE TOL. ±1°	
PROJECT REFERENCE:		DRAWN BY: PAUL S. MASURE 02/14/03	
MATERIAL:		CHECKED BY: CINDY TALBOT 04/24/03	
IN ACCEPTING OUR DRAWINGS, DOCUMENTATION FOR QUALITY, YOU AGREE TO HOLD HUBBELL HUBBELL CORPORATION AND ITS DESIGNS SHOWN HEREIN, AND HAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION.		APPROVED BY: CINDY TALBOT 04/24/03	
TITLE: ASSY. MULTIMODE ST-SC DUPLEX 50/125		FIBER PATCH CORDS	
SIZE DRAWING NO. D 11307C		HUBbell HUBBELL INCORPORATED (Delaware) 141 Lord's Hill Road, Stonington, Connecticut 06378	
SCALE: 1/1		SHEET 1 OF 1	
REV. C			