
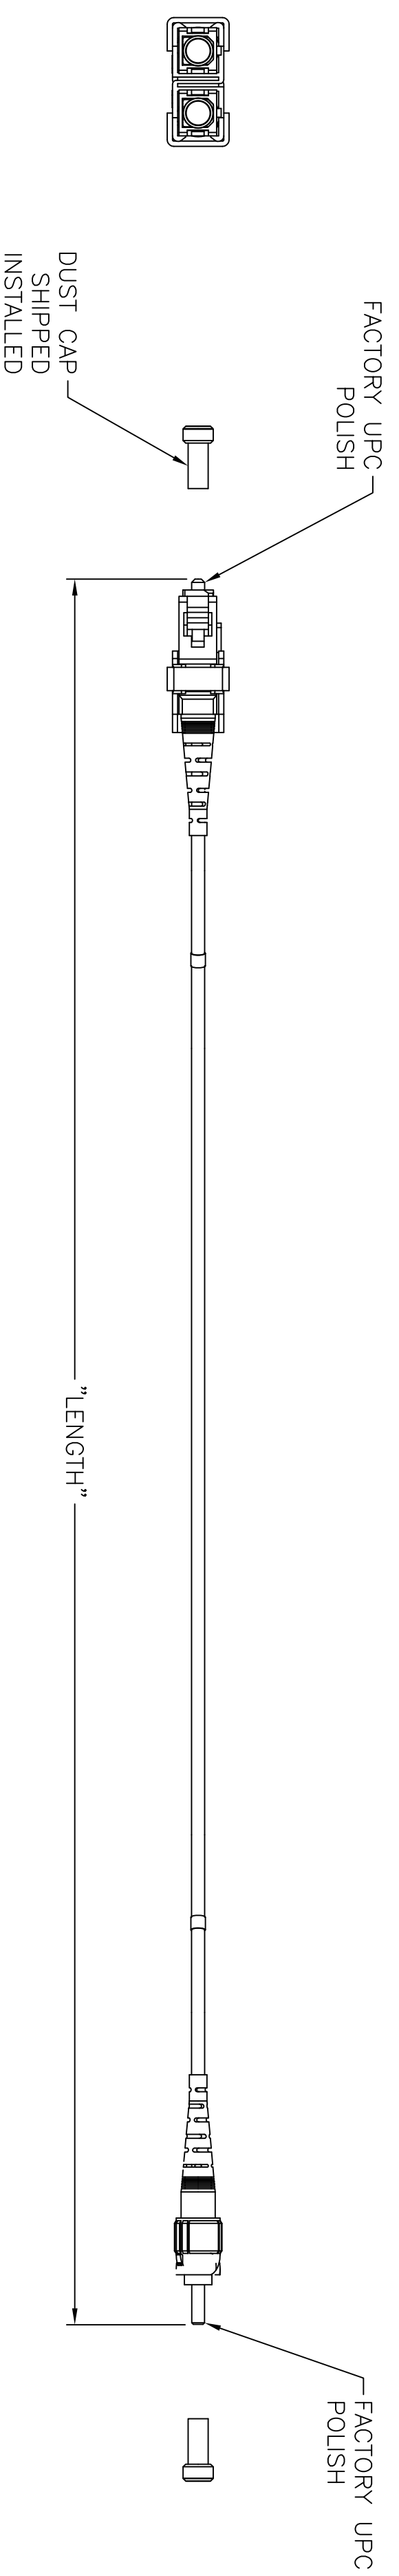
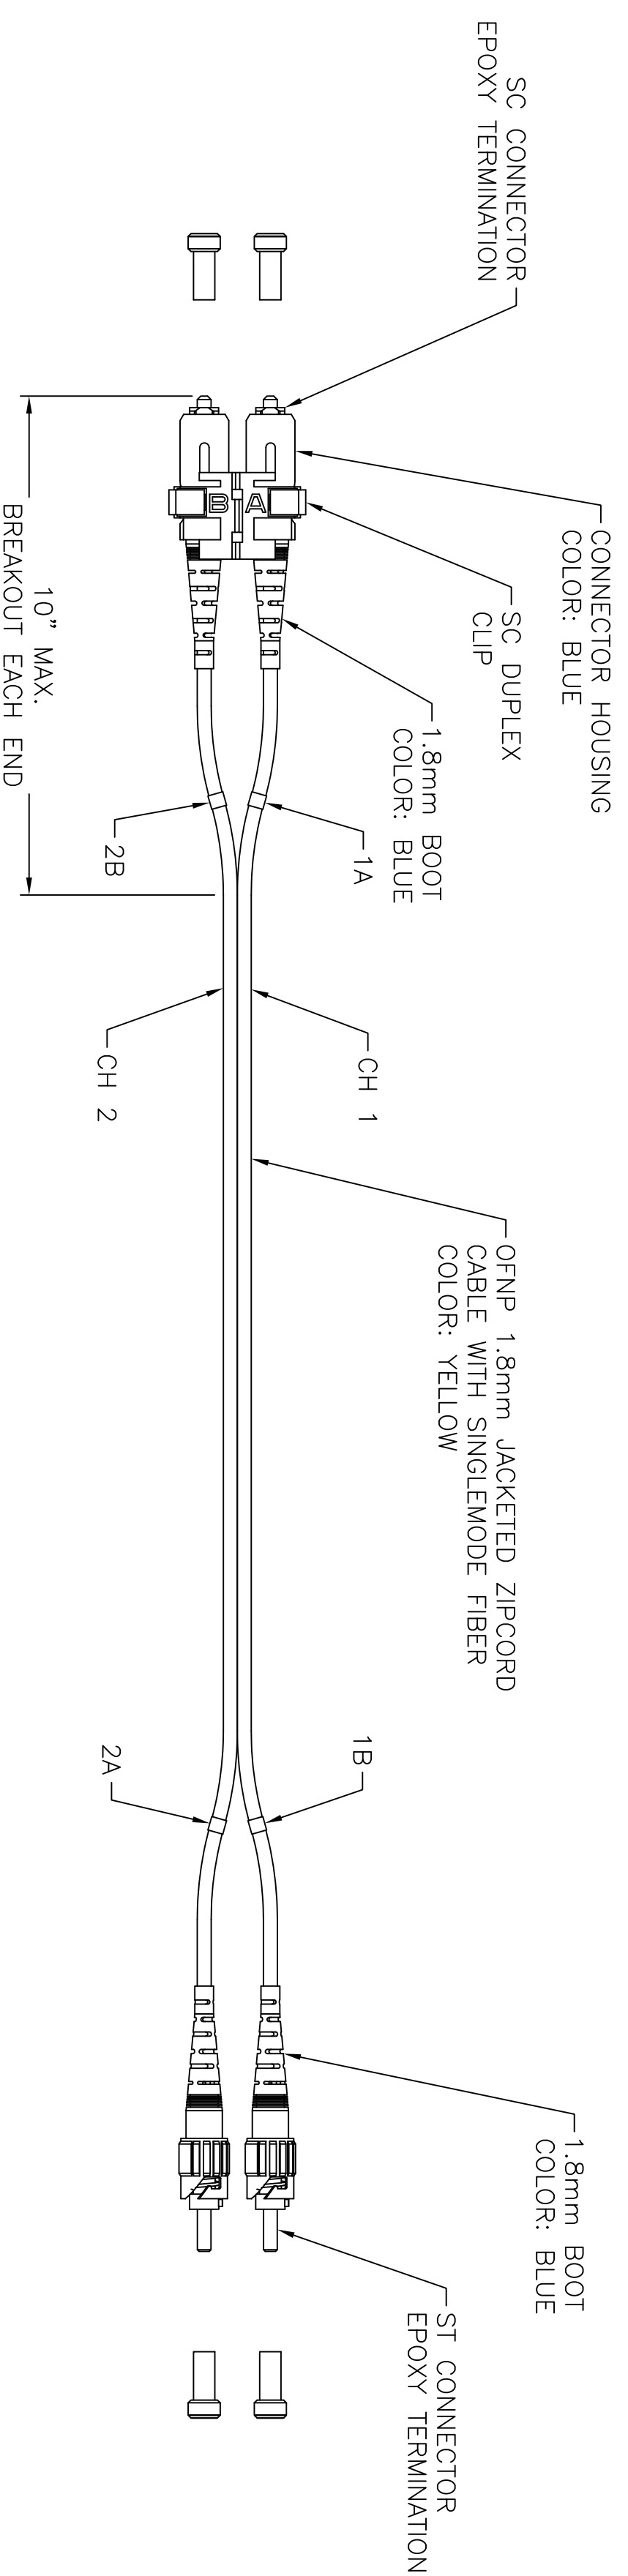


ITEM NO.	DESCRIPTION	QTY.
1	SC CONNECTOR DUST CAP	2
2	SC CONNECTOR BODY	2
3	SC DUPLEX CLIP	1
4	1.8mm SC CONNECTOR BOOT	2
5	1.8mm DUPLEX CABLE	A/R
6	1.8mm ST CONNECTOR BOOT	2
7	ST CONNECTOR NUT	2
8	ST CONNECTOR DUST CAP	2

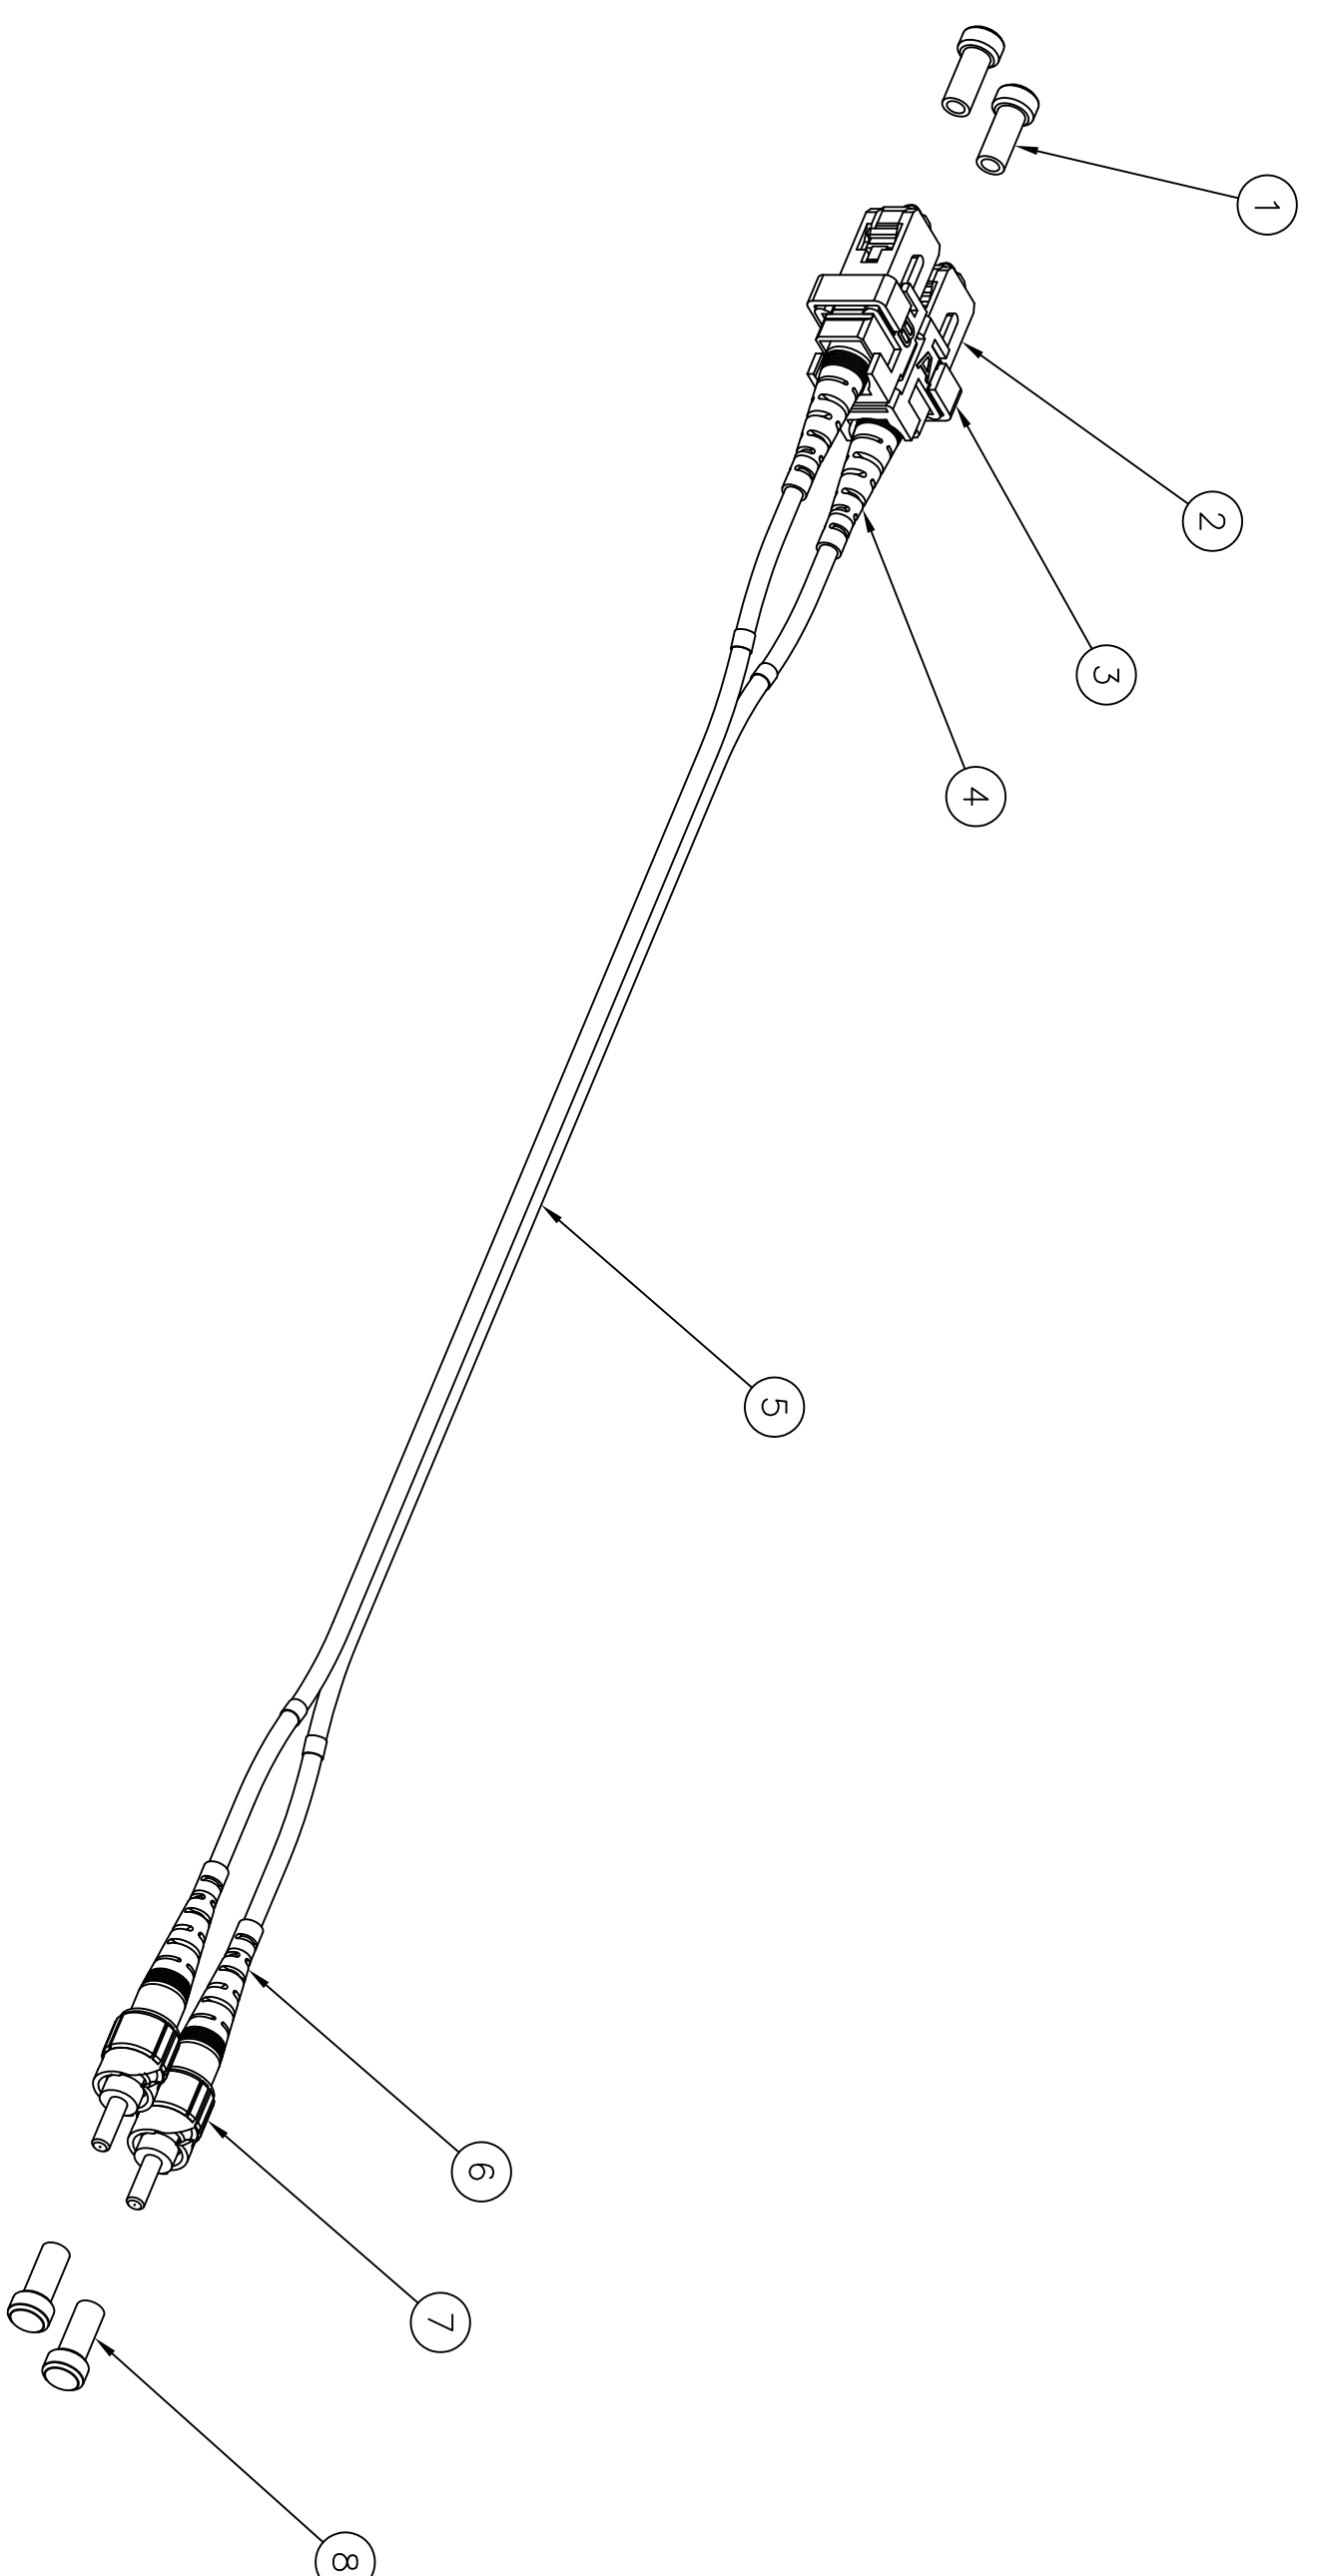


"x" = 1 THRU 25 ("LENGTH" IN METERS)

CATALOG NUMBER	DESCRIPTION
DFCSTJSCXSXM	9/125um 052 ST-SC DUPLEX CORD

NOTES:

- CONNECTOR OPTICAL, MECHANICAL AND ENVIRONMENTAL PERFORMANCE MEETS TIA/EIA-568-C.3 SPECIFICATIONS.
- CONNECTOR USES A PC RADIUS TIP ZIRCONIA CERAMIC FERRULE.
- SC CONNECTOR HOUSING IS INJECTION MOLDED ENGINEERING PLASTIC RESIN. ST CONNECTOR NUT IS NICKEL PLATED ZINC DIE CAST.
- OPTICAL INSERTION LOSS AND RETURN LOSS TEST DATA INCLUDED IN EACH BAGGED PATCH CORD.
- CABLE MARKINGS TO IDENTIFY CHANNEL (1 OR 2) AND EACH END (A OR B).
- SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

REV.	EGN	DATE	DESCRIPTION	CHG BY	APPD BY
D	18030	11/01/12	REVISED CABLE TO PLENUM; ADDITIONAL LENGTHS	MMA	

Created on AUTOCAD		DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1992 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM). .XX = ±.01 (25) .XXX = ±.005 (127) .XXXX = ±.0025 (635) ANGLE TOL. ±1°	
PROJECT REFERENCE:		IN ACCEPTING OUR DRAWINGS, BUYERS, CONTRACTORS, ARCHITECTS, ENGINEERS, OR OTHERS, AGREE TO HOLD HUBBELL CORPORATION HARMLESS FROM ALL LIABILITY FOR THE DESIGN, CONSTRUCTION, OPERATION, MAINTENANCE, OR PERFORMANCE OF ANY PROJECT BASED ON THESE DRAWINGS, AND NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGNS SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION	
DRAWN BY: PAUL S. MAQUIRE 02/14/03		 Hubbell Premise Wiring HUBBELL INCORPORATED (Delaware) 141 Lord's Hill Road, Torrington, Connecticut 06378	
CHECKED BY: CINDY TALBOT 04/24/03		TITLE: FIBER PATCH CORDS ASSY. SINGLEMODE ST-SC DUPLEX	
APPROVED BY: CINDY TALBOT 04/24/03		SIZE: DRAWING NO. 11312C SCALE: 1/1 SHEET 1 OF 1	
		REV. D	