
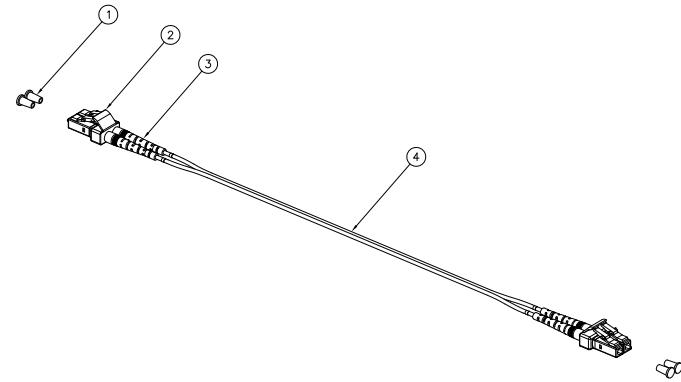


ITEM NO.	DESCRIPTION	QTY.
1	LC CONNECTOR DUST CAP	4
2	LC DUPLEX CONNECTOR BODY	2
3	1.6mm LC CONNECTOR BOOT	4
4	1.6mm DUPLEX CABLE	A/R

CATALOG NO.	DESCRIPTION	CABLE JACKET COLOR
DFRCLCLCDxxMM	LC-LC DUPLEX PATCH CORD 50/125um OM2 MULTIMODE	ORANGE
DFRCLCLCExxMM	LC-LC DUPLEX PATCH CORD 50/125um OM3 MULTIMODE	AQUA
DFRCLCLCFxxMM	LC-LC DUPLEX PATCH CORD 50/125um OM4 MULTIMODE	AQUA


xx= LENGTH IN METERS

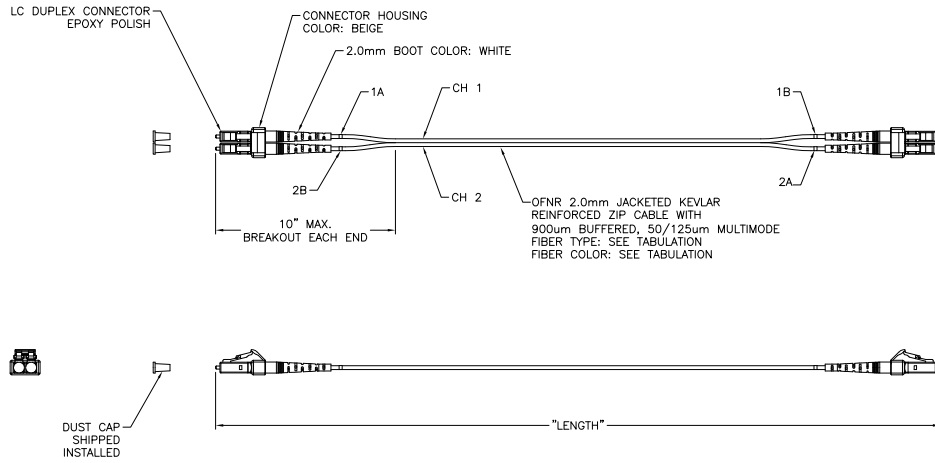

NOTES:

- CONNECTOR OPTICAL, MECHANICAL AND ENVIRONMENTAL PERFORMANCE MEETS TIA/EIA-568-C.3 SPECIFICATIONS.
- CONNECTOR USES A PC RADIUS TIP ZIRCONIA CERAMIC FERRULE.
- CONNECTOR HOUSING IS INJECTION MOLDED ENGINEERING PLASTIC RESIN.
- OPTICAL INSERTION LOSS TEST DATA INCLUDED IN EACH BAGGED PATCH CORD.
- CABLE MARKINGS TO IDENTIFY CHANNEL (1 OR 2) AND EACH END (A OR B).
- SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

REV.	ECN	DATE	DESCRIPTION	CHG BY	APPD BY
2	23955	06/03/20	REVISED BOOT COLORS	AK	DPO

Created on AUTOCAD	DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1982 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM). TOLERANCES .XX = ±.01 (.25) .XXX = ±.005 (.127) .000X = ±.0025 (.0635) ANGLE TOL: ±1°	PROJECT REFERENCE:	 Hubbell Premise Wiring HUBBELL INCORPORATED (Delaware) 14 Lord's Hill Road, Storington, Connecticut 06378
	IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGN SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION.	MATERIAL:	
		DRAWN BY: D. PECK 3/5/13	SIZE DRAWING NO. D HWS14273C
		CHECKED BY:	REV. 2
		APPROVED BY:	SCALE: 1/1 SHEET 1 OF 1