CATALOG PARTS	Description	LENGTH (FT)
FPCPMPOB50G4M3FN	FIBER P-CORD, 12F, MPO-MPO,OM4,TYPB,N/PE	3
FPCPMPOB50G4M7FN	FIBER P-CORD, 12F, MPO-MPO,OM4,TYPB,N/PE	7
FPCPMPOB50G4M10FN	FIBER P-CORD, 12F, MPO-MPO,OM4,TYPB,N/PE	10
FPCPMPOB50G4M15FN	FIBER P-CORD, 12F, MPO-MPO,OM4,TYPB,N/PE	15

ITEM NO.	DESCRIPTION	QUANTITY
1	CONNECTOR, MPO LOW LOSS 12F 3mm,F,OM4,AQ	2
2	FIBER CABLE,12F,OM4,PL,AQ	SEE TABLE
3	LEG LABEL	2
4	P/N-DATACODE LABEL	1

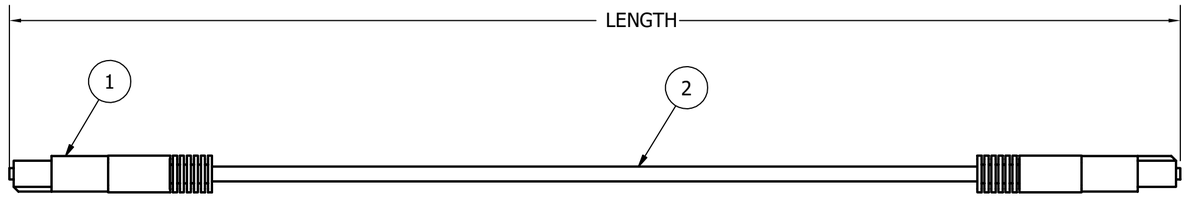

TYPE A PINOUT

1
2
3
4
5
6
7
8
9
10
11
12

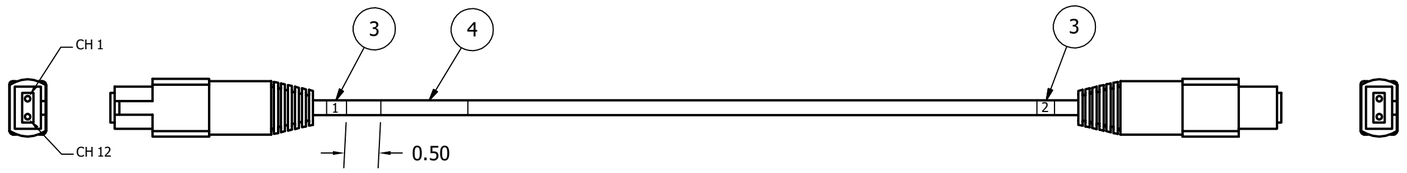

TYPE B PINOUT

12
11
10
9
8
7
6
5
4
3
2
1

NOTES:

1. CONNECTOR OPTICAL, MECHANICAL AND ENVIRONMENTAL PERFORMANCE MEETS TIA/EIA-568-C.3 SPECIFICATIONS.
2. CONNECTOR USES A PC RADIUS TIP ZIRCONIA CERAMIC FERRULE.
3. CONNECTOR HOUSING IS INJECTION MOLDED ENGINEERING PLASTIC RESIN.
4. OPTICAL INSERTION LOSS TEST DATA INCLUDED IN EACH BAGGED PATCH CORD.
5. RAYON BRAID PULLING EYE IS ATTACHED AT END A.
6. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

REV	ECN	DATE	DESCRIPTION	CHG BY	APPD BY
1	230620031205		INITIAL RELEASE	RSS	MMA

Created on INVENTOR

DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1982
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM).
TOLERANCES.XX = ±.01 (.25)
.XXX = ±.005 (.127)
.XXXX = ±.0025 (.0635)
ANGLE TOL ±1°

IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGNS SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION

PROJECT REFERENCE: NPD 3753

MATERIAL: SEE NOTES

DRAWN BY: RSS

CHECKED BY:

APPROVED BY:

Hubbell Premise Wiring
HUBBELL INCORPORATED (Delaware)
14 Lord's Hill Road, Stonington, Connecticut 06378

TITLE: FIBER PATCH CORDS, 12F, MPO-MPO, MM, PL

SIZE	DRAWING NO.	REV.
C	HWS15231C	1

SCALE: 2/1 SHEET 1 OF 1