M-13391 | 2

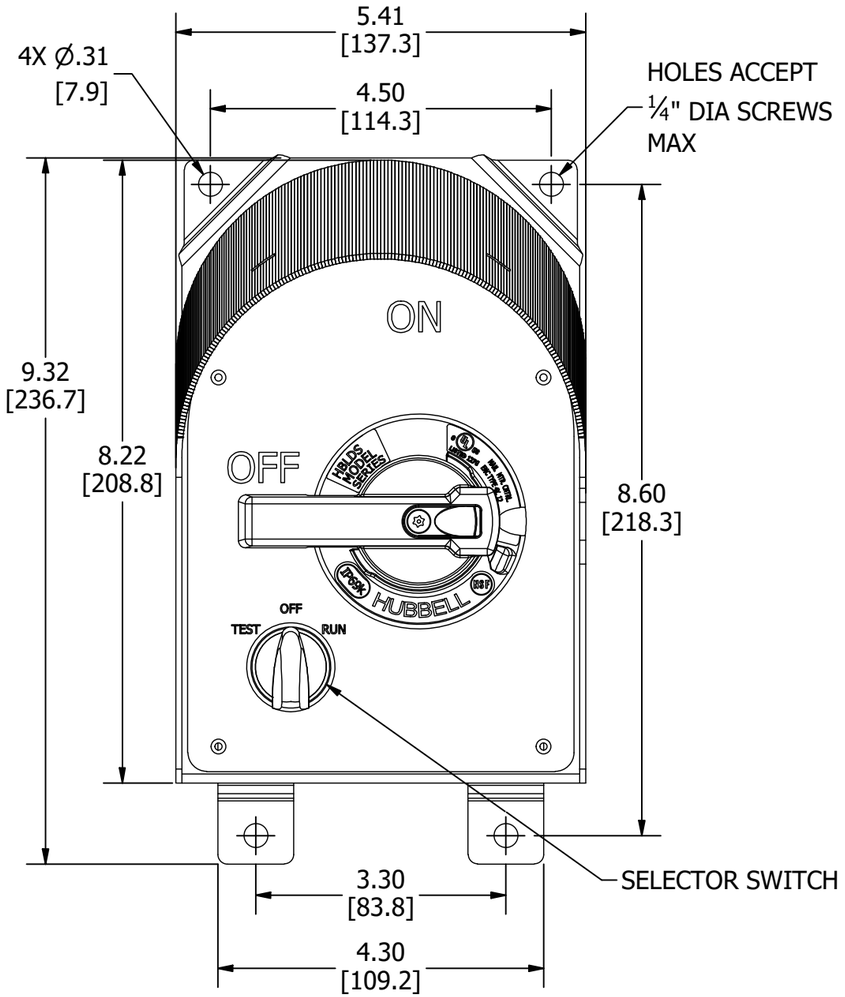

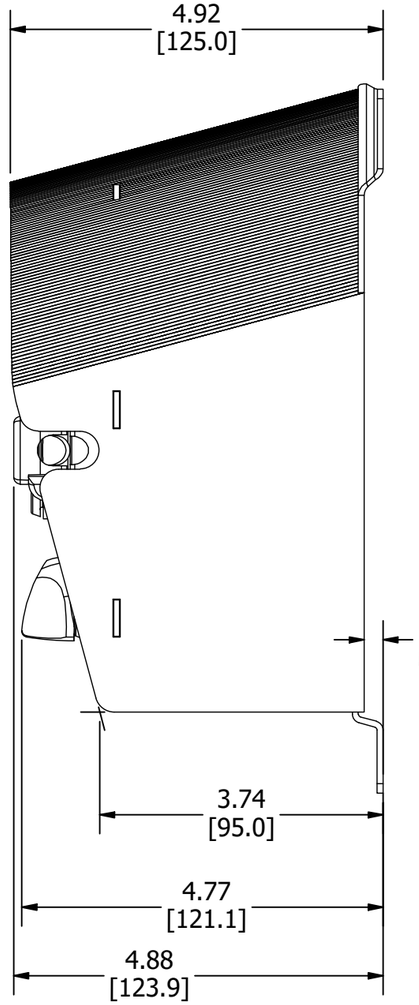

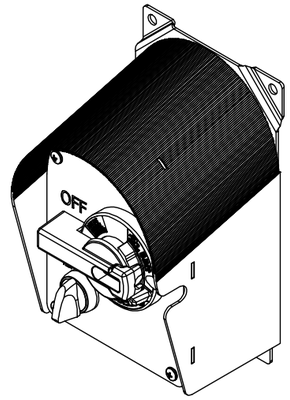

30A 600V A.C. RATINGS	
HP	VOLTAGE
1 HP	120V AC 1Ø
3 HP	200-240V AC 1Ø
5 HP	480V AC 1Ø
7.5 HP	200-240V AC 3Ø
15 HP	480V AC 3Ø
15 HP	600V AC 3Ø

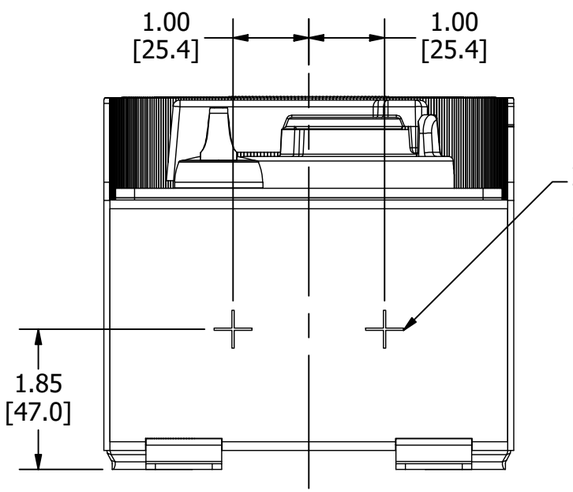

DRILL SPOTS FOR ¾" NPT CONDUIT FITTING, BOTTOM FEED ONLY.
INSTALLER TO DRILL OR PUNCH
Ø1.11 INCH (Ø28.2 mm) HOLE FOR CONDUIT FITTING.

NOTES UNLESS OTHERWISE SPECIFIED:
1. CATALOG NUMBERS: HBLDS3SSRJ, HBLDS3SSRACJ, & HBLDS3SSRVFDJ.
2. DIMENSIONS SHOWN ARE IN INCHES [mm].
3. ENCLOSURE TYPE 4X, IP69k & 12.
4. cULus LISTED.

CODE 74545

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
ENCLOSURE & HARDWARE	STAINLESS STEEL	
HANDLE & MOUNT	PBT	
GASKET	EPDM FOAM	
SELECTOR SWITCH	PLASTIC	
CONTACT BLOCKS	PLASTIC	

DIMENSION SHEET FOR CAT. NO.
SEE NOTES
REPAIRABLE ☐
NON-REPAIRABLE ☒

SYM	DESCRIPTION	APPROVED	DATE
2	REMOVED VIEW OF CONDUIT HUB & VIEW OF HUB WITH DIMENSIONS; REMOVED HUB FROM PARTS LIST DCN 220907023814 RM	JCF	10/3/22
1	RELEASED PER DCN# 21935 CAC	TLS	04/06/16

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
CIRCUIT-LOCK™ 30 AMP SLOPED TOP STAINLESS STEEL DISCONNECT SWITCH

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .030
ANGLES ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY	CAC	APP. BY	TLS
TR. BY		SCALE	NONE
CHK'D BY	TLS	DATE	4/6/2016

B | M-13391 | 2