M-14123 | 1

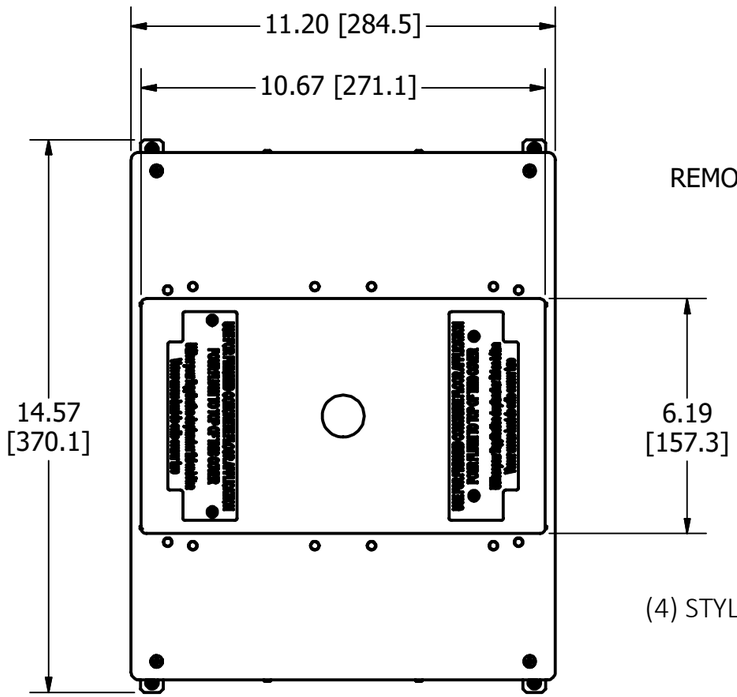

TOP VIEW

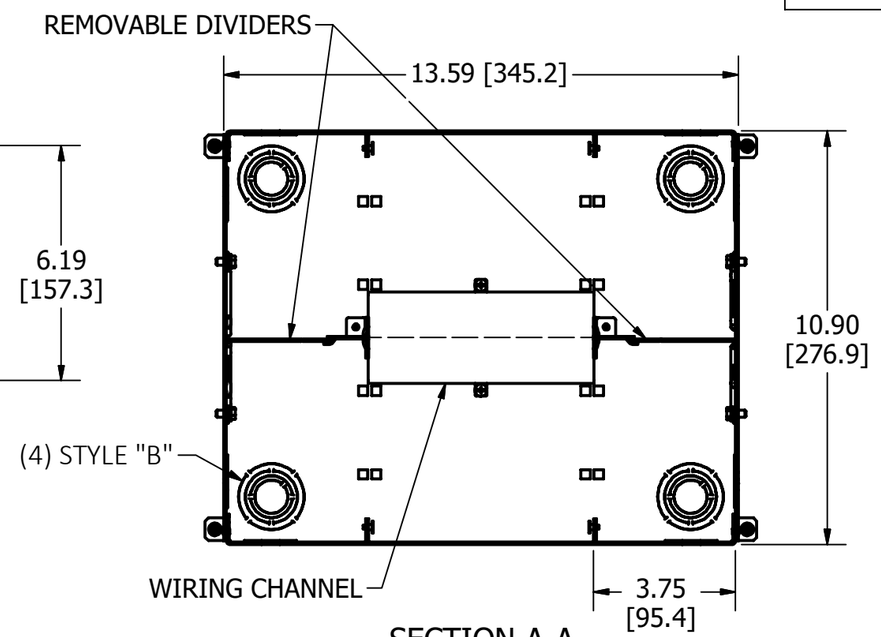

SECTION A-A
VIEW THROUGH BOX BELOW TOP

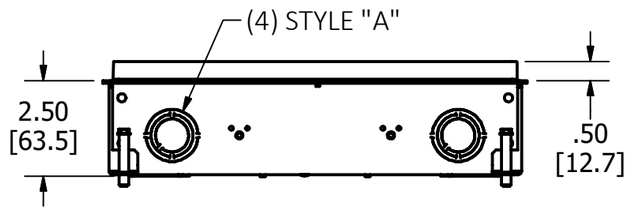

END VIEW

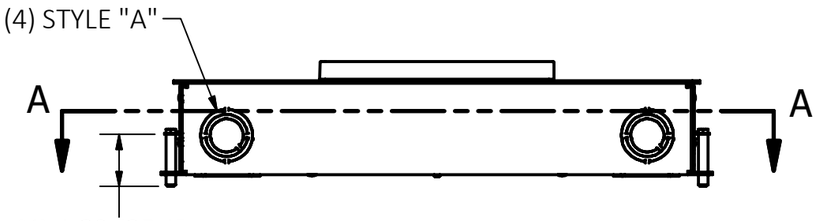

SIDE VIEW

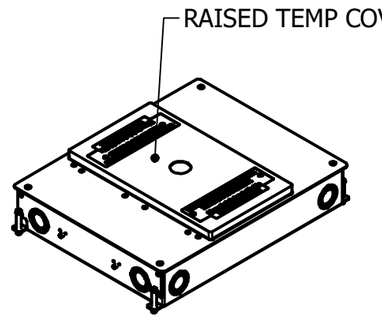

ISOMETRIC

NOTES:
1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
2. PRODUCT IS cULus LISTED. COMPLIES WITH UL 514A.
3. EACH GANG SUPPLIED WITH 6" [152.4] 12 GA. AWG GROUND PIGTAIL.
4. MINIMUM CONCRETE POUR: 2.50" [63.5].
5. WIRING CHAMBER VOLUMES (RECESSED COVER): (4) 41.5 IN³ [680 CM³].
6. WIRING CHAMBER VOLUMES (FURNITURE FEED): (2) 118 IN³ [1934 CM³].
7. WIRING CHANNEL AREA: (2) .39 IN² [250 MM²].

CAGE CODE 74545

CONCENTRIC KNOCKOUTS	
STYLE	TRADE SIZE
A	1/2", 3/4", 1"
B	1/2", 3/4", 1", 1-1/4"

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BOX ASSEMBLY	16 GA. STEEL	ZINC **
TOP MOUNTING ASSY	14 GA. STEEL	ZINC
GROUND WIRES	COPPER	
WIRING CHANNEL	16 GA. STEEL	ZINC
REMOVABLE DIVIDERS	THERMOPLASTIC	
FASTENERS	STEEL	ZINC
FLUSH TEMP COVER	16 GA. STEEL	ZINC
RAISED TEMP COVER	THERMOPLASTIC	YELLOW

** CATALOG NO. CFB4G25CRE BOX ASSEMBLY IS GALVANIZED AND GREEN EPOXY COATED ON EXTERIOR SURFACE.

DIMENSION SHEET FOR CAT. NO.
CFB4G25E, CFB4G25CRE

REV	DESCRIPTION	APP	DATE
1	ORIGINAL RELEASE PER 210929012903	SBW	2/2/22

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE: CONCRETE FLOOR BOX, 4 GANG EXTENDED, FOR RECTANGULAR COVER, SHALLOW

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX= ± .005
ANGLE TOL. ±2'

DR. BY SBW | SCALE 1/4
CHK. BY | DATE 2/8/2021

B
M-14123
1