


ø5/8 [16] ANCHOR BOLT  
(BY CUSTOMER)

STAINLESS STEEL HOLD  
DOWN CLIP BOLTED AND  
GLASSED INTO ENCLOSURE

LARGE DIAMETER FLAT  
WASHER PROVIDED WITH  
ENCLOSURE—SAVE WHEN  
REMOVING FROM PALLET

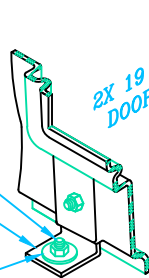

ENCLOSURE BOLT DOWN DETAIL


CAST BRONZE HASP  
AND PIVOT BLOCK

SS 1/2-13 UNC  
COUNTERSUNK  
CAPTIVE PENTA  
HEAD BOLT

THRU HOLE FOR  
PADLOCKING



STANDARD HASP DETAIL

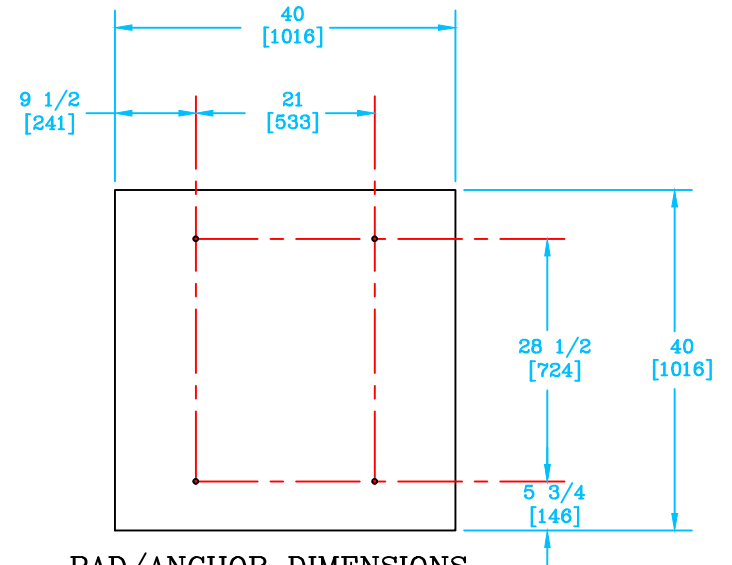

PAD/ANCHOR DIMENSIONS

ANCHOR BOLTS TO BE ø5/8 [16] AND  
EXTEND 1 1/2 [38] ABOVE PAD SURFACE  
PAD PROVIDED BY OTHERS OR BY HUBBELL  
(CONTACT CUSTOMER SERVICE FOR PRICING)

NOTES:

- ENCLOSURE MATERIAL PER HUBBELL POWER SYSTEMS UNDERGROUND MATERIALS SPECIFICATION UG-9 DATED JULY, 1981.
- MATERIAL THICKNESS TO BE 3/16 [5] MINIMUM

DIMENSIONS ARE IN INCHES OR MILLIMETERS IN BRACKETS UNLESS OTHERWISE NOTED.						
DRN	BY	DATE	WEIGHT		3621 INDUSTRIAL PARK DR LENOIR CITY, TN 37771 800-346-3062 www.quazite.com	LOC
ENG	CHK	DATE	59kg			OB
APR	MLK	9/22/11	SCALE	DRAWING DESCRIPTION HUBBELL® EQUIPMENT ENCLOSURE 34 X 34 X 43 WILLOW GREEN W/TYPE 2 TRANSFORMER VENTS		REV
APR			NTS			B
PROJECT NUMBER				DRAWING NUMBER		2/13
104214				SHEET 1 OF 1		NE342000WD2