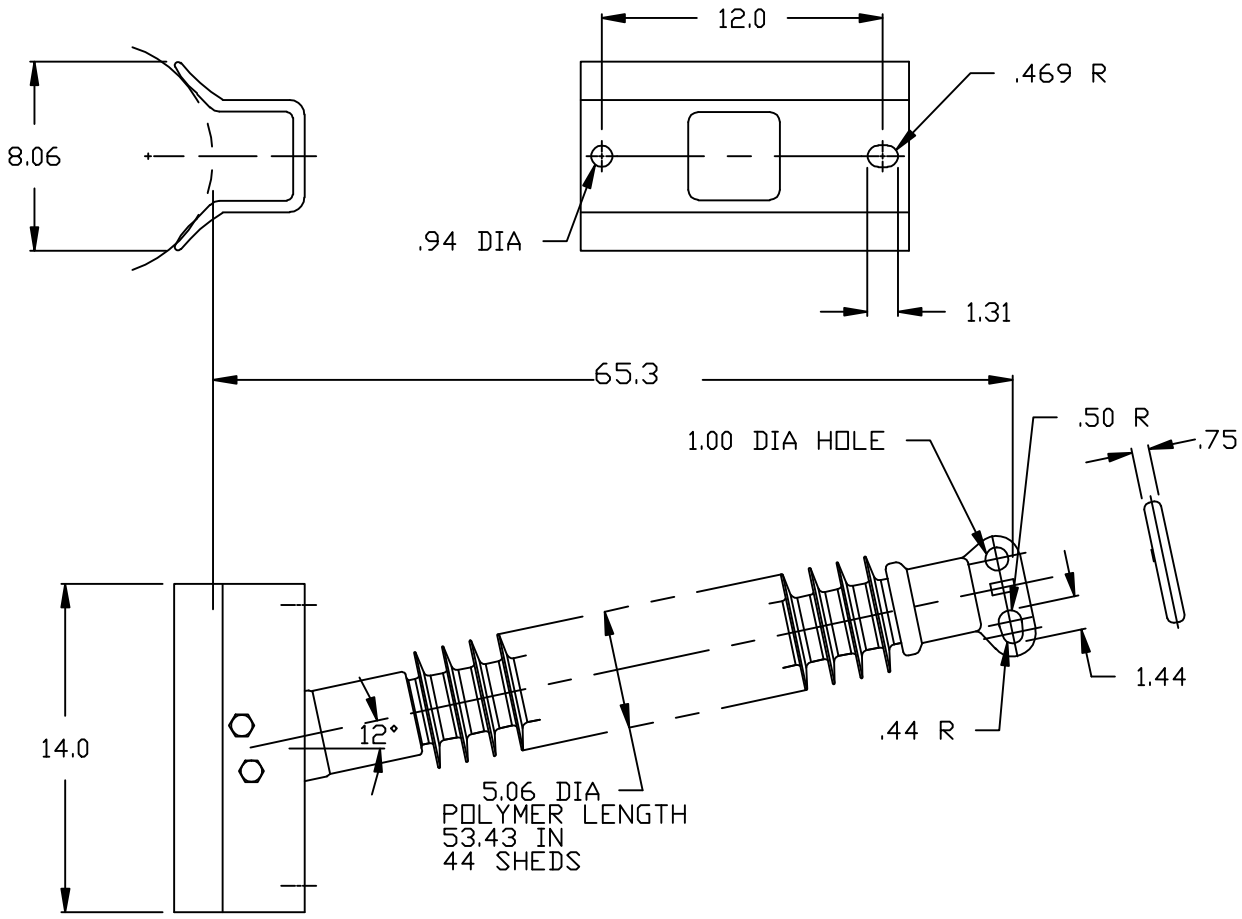


STRIKE DISTANCE	54 IN
LEAKAGE DISTANCE	139 IN
SCL	2710 LB (12.1 kN)
RCL	1355 LB (6 kN)
DRY 60 HZ FLASHOVER	565 kV
WET 60 HZ FLASHOVER	495 kV
WET 60 HZ WITHSTAND	420 kV
IMPULSE CRITICAL POSITIVE	855 kV
IMPULSE WITHSTAND POSITIVE	810 kV
IMPULSE CRITICAL NEGATIVE	950 kV
IMPULSE WITHSTAND NEGATIVE	900 kV
WEIGHT	57 LB

FLOOD WASHABLE
SILICONE RUBBER HOUSING

ELECTRICAL CHARACTERISTICS IN
ACCORDANCE WITH ANSI C29.1-1988

Program Revision

REV DATE 03/23/18

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

HUBBELL® POWER SYSTEMS

TITLE
QUADRI*SIL LINE POST SERIES 250

SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
S	ER_250-QP	P250053S0020	11

DO NOT SCALE THIS DRAWING	DRN BY NON	DATE 08/27/07	SHEET 1 OF 1

1:8