


1/2 [13] X 4 [102] PULL SLOT  
W/ Ø1/4 [6] CENTER PIN  
(2 PLACES)

Ø5/8 [16] THRU. HOLE  
W/ Ø1 1/4 [32] X 1/2 [13]  
DEEP C'BORE (2 PLACES)

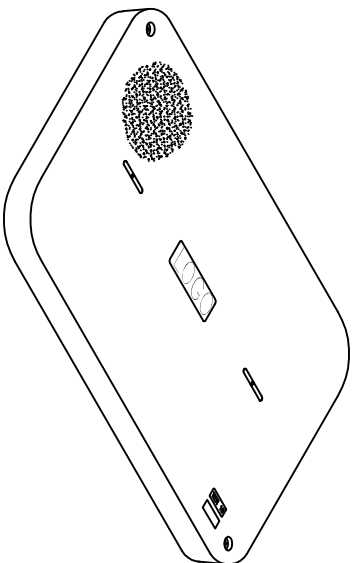

**NOTES:**

1. LOGO TO BE SPECIFIED: \_\_\_\_\_
2. THIS COVER IS RATED FOR A STATIC DESIGN LOAD OF 15,000 LBS. [66,720 N] OVER A 10 [254] X 10 [254] AREA AND MUST PASS A MIN. STATIC TEST LOAD OF 22,500 LBS. [100,085 N].
3. FURNISHED W/ (2) 3/8-7 X 4 [101] LONG HEX HEAD AUGER BOLTS, (2) Ø3/8 [10] FLAT WASHERS & (2) Ø3/8 [10] GROMMETS
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.

DIMENSIONS ARE IN INCHES OR MILLIMETERS IN BRACKETS UNLESS OTHERWISE NOTED.

WEIGHT	200#	200#	91kg	91kg	91kg	91kg
DATE	8/8/03	8/8/03	8/8/03	8/8/03	8/8/03	8/8/03
REV	1	1	1	1	1	1
DATE	8/8/03	8/8/03	8/8/03	8/8/03	8/8/03	8/8/03
REV	C	C	C	C	C	C
DATE	9/12	9/12	9/12	9/12	9/12	9/12



DESCRIPTION	QUAZITTE® COVER
QUANTITY	1 OF 1
DRAWING NUMBER	PG3048HG00
PROJECT NUMBER	03662