




CAT. #	SIZE	A	B	C	D	E	F	G	H	J	K
2160	2-1/2"	3.32 [84.4]	3.35 [85.1]	3.42 [87.0]	2.93 [74.4]	3.16 [80.1]	2.42 [61.5]	2.81 [71.4]	2.26 [57.3]	0.55 [14.0]	3.142-11.5UNS
2162RAC	3"	3.91 [99.3]	4.08 [103.5]	4.11 [104.4]	3.55 [90.2]	3.79 [96.3]	3.01 [76.5]	3.43 [87.0]	2.84 [72.2]	0.55 [13.8]	3.776-11.5UNS
2164	3-1/2"	4.01 [101.9]	4.55 [115.6]	4.70 [119.4]	4.05 [102.9]	4.29 [109.0]	3.49 [88.6]	3.93 [99.8]	3.27 [83.1]	0.47 [11.9]	4.276-11.5UNS
2166	4"	4.16 [105.6]	5.06 [128.5]	5.27 [133.8]	4.53 [115.1]	4.78 [121.4]	3.98 [101.0]	4.42 [112.3]	3.78 [96.0]	0.46 [11.7]	4.776-11.5UNS

REVISIONS			
REV.	DATE	DESCRIPTION	BY:
-	07-26-21	INITIAL RELEASE OF DRAWING	VS


FILE NO.:
SET SCREW CONNECTOR-STEEL INSULATED 2.50 TO 4.00 CUS

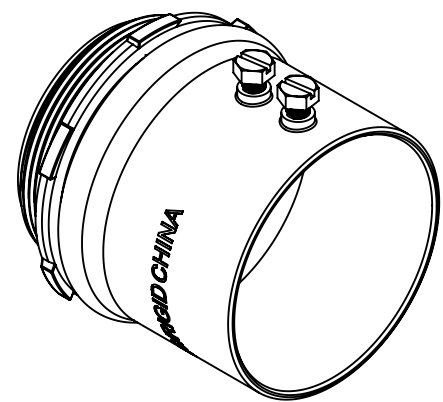

ISOMETRIC VIEW

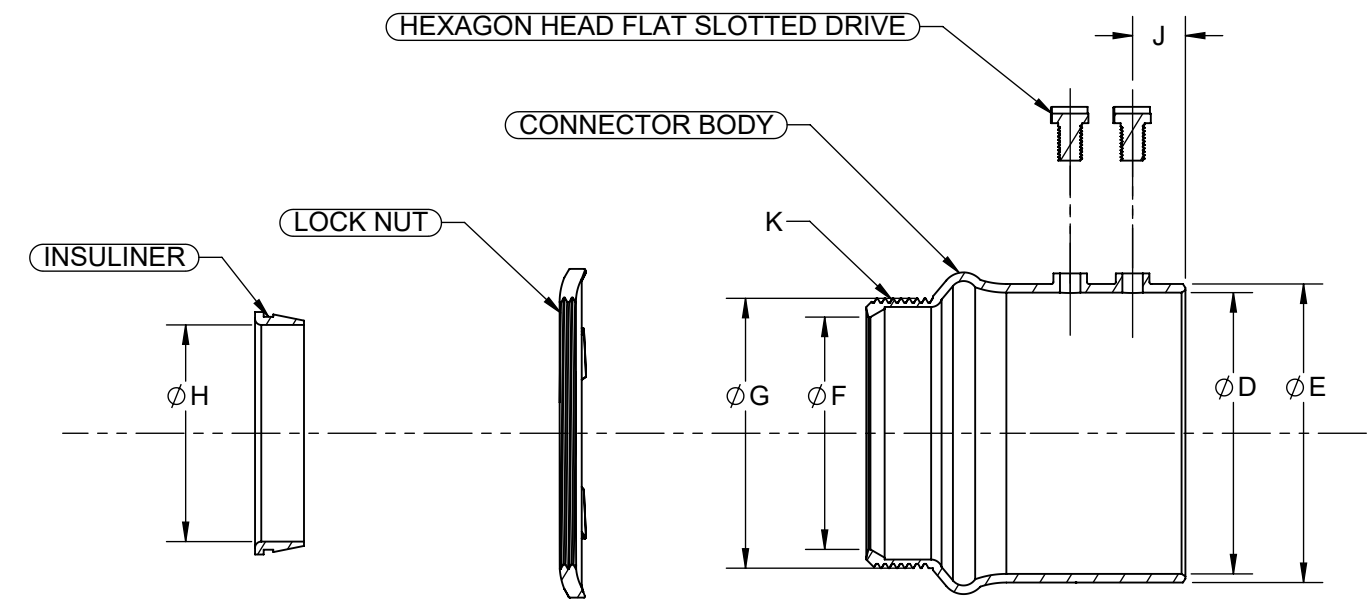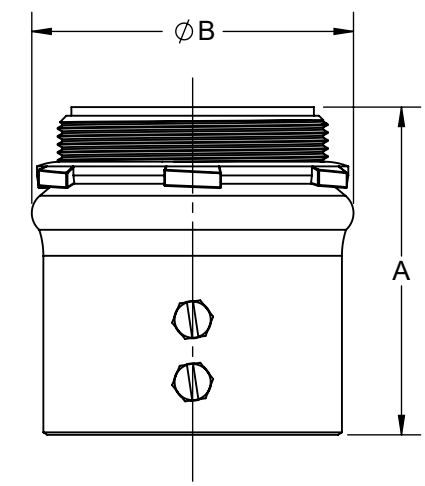

SECTION A-A

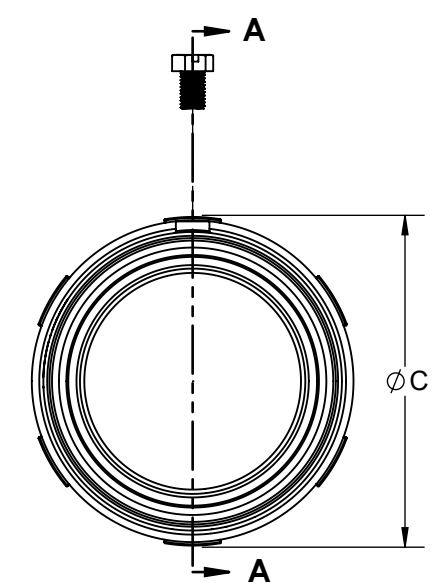

DESCRIPTION	MATERIAL	FINISH
INSULINER	NYLON	-
LOCK NUT	STEEL	ZINC
HEXAGON HEAD FLAT SLOTTED DRIVE	STEEL	ZINC
CONNECTOR BODY	STEEL	ZINC

LIST OF PARTS
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE
TITLE:
SET SCREW CONNECTOR-STEEL INSULATED 2.50 TO 4.00 CUS

- NOTES:**
- ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
 - LOCKNUT SHALL BE HAND-TIGHTENED AND THEN FURTHER TIGHTENED 1/4 TURN WITH A HAMMER AND A FLAT BLADED SCREWDRIVER OR BY AN EQUIVALENT METHOD.
 - cULus LISTED.

TOLERANCE UNLESS OTHERWISE SPECIFIED .XX DECIMAL ±.015 .XXX DECIMAL ±.005 ANGLE ±2°			DRAWN BY:	VS	SCALE:	SIZE:
			APP. BY:	N.S.		
	DATE:	07-26-21	1:2	B		

DIMENSION SHEET FOR CAT. NO.
SEE CHART

1 1/4" x 7 1/4"