




RÉVISIONS					
ZONE	REV.	DESCRIPTION			DESSINÉ PAR
	A	ADD TABLE			J.N.PILOTTE
					DATE
					2009-09-08
					APPR.
					Y.V



Δ
 $\phi .66[16.7] \nabla 1.13[28.6]$
 "T" $\nabla 1.00[25.4]$
 (SEE TABLE)

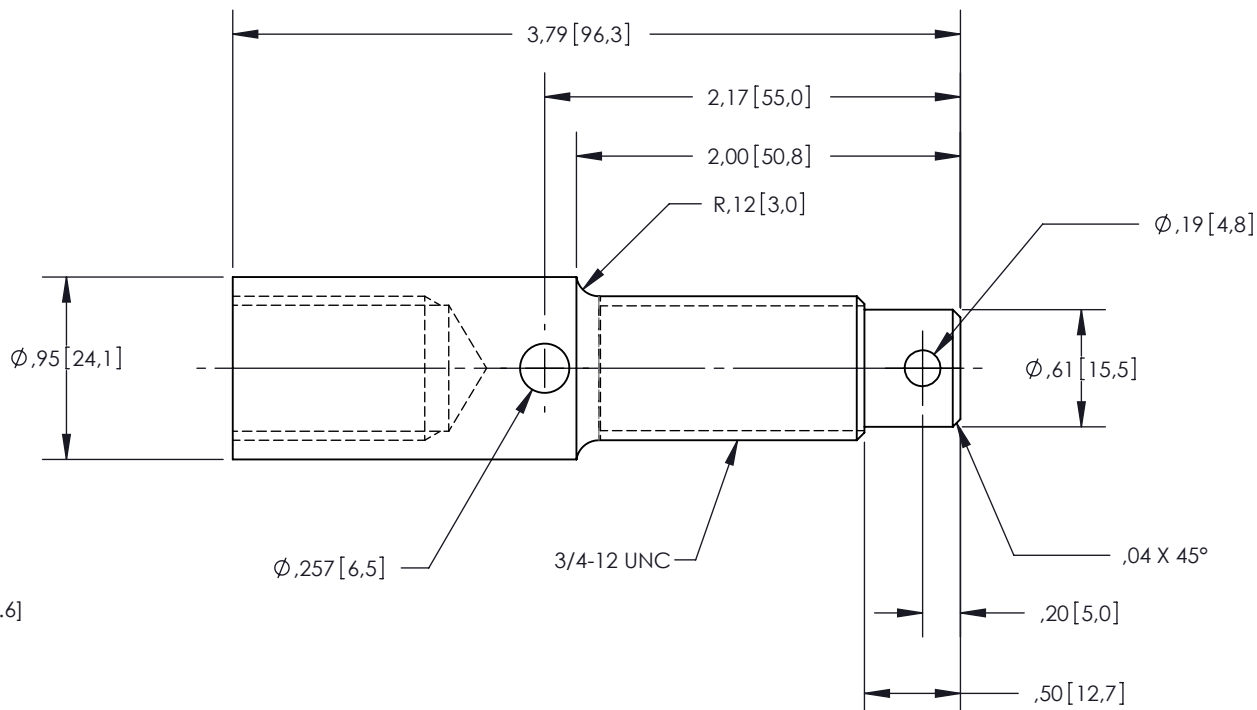

S-1001-5209-X	THREAD "T"
-1	3/4-16
-2	3/4-20

1	1	S-1001-5209		CONNECTOR 3/4-12 UN, FEMALE 3/4-20 UNEF X 1.0 DEPTH	COPPER
ITEM NO.	QTY	DRAWING NO.	PART NO.	DESCRIPTION	NOTE / MAT'L
PARTS LIST					

GENERAL TOLERANCES
(UNLESS OTHERWISE SPECIFIED)

X. ± 0.040
 .X ± 0.020
 .XX ± 0.010
 .XXX ± 0.004
 ANGLES $\pm 0.25^\circ$
 RADIUS ± 0.010

REMOVE BURRS AND
 BREAK SHARP EDGES
 DIMENSIONS ARE IN
 INCHES
 (UNLESS OTHERWISE SPECIFIED)

REPLACE:

DRAWN BY: J. Cliche DATE: 2009/02/13

CHECK BY:

PROJECT ENG:

PROJECT MANAGER:



ElectroComposites
solid HV bushings solution

TITLE: SHORT CONNECTOR 3/4-12
WITH FEMALE 3/4-20 UNEF

FORMAT	CAGE CODE	DRAWING NO.	REVISION
A		S-1001-5209-X	A
SCALE	1:1	GENERATED BY: SolidWorks 2008	SHEET 1 of 1

This drawing is the proprietary property of Electro Composites (2008) ULC, not part of the public domain, and is issued with the express understanding and agreement that it is not to be reproduced or copied in whole or in part or issued for furnishing information to others, or used directly or indirectly, in any way detrimental to the interest of Electro Composites (2008) ULC and is to be returned upon request by Electro Composites (2008) ULC. All Rights Reserved.