
AP-2-UFB-3500-4000 UNDER FOOTING BRACKET CATALOG NO: PSA1001N [P] OR PSA1052N [G]

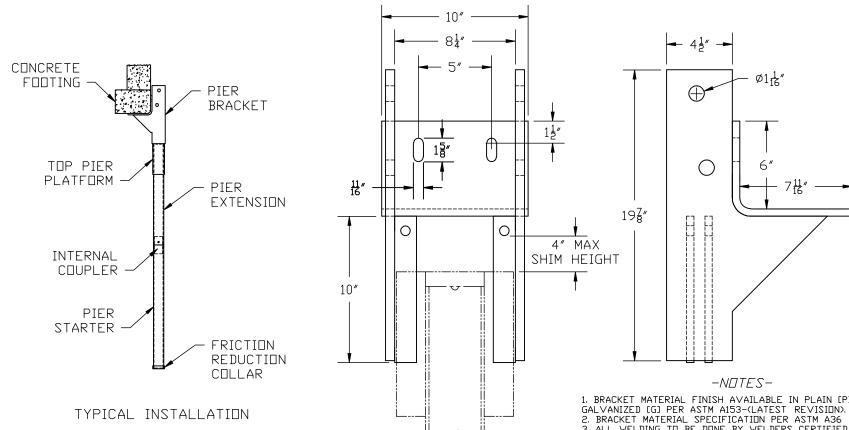

AP-2-UF-3500/4000 SYSTEW COMPONENTS									
Catalog No.	Pier System	Bracket (Qty)	Top Pier Platform (Qty)	Pier Section (Qty)	Starter Section (Qty)	Plain Pier Sleeve (Qty)	Modified Pier Sleeve (Qty)	Working Capacity (kips)	Ultimate Capacity (kips)
PSA1000N	AP-2-UF-3500.165 [PA] [14'-0']	1	1	3	1	NA	NA	42.5	85
PSA1051N	AP-2-UF-3500.165 [GA] [14'-0"]	1	1	3	1	NA	NA	42.5	85
PSA1094N	AP-2-UF-3500.165M [PA] [14'-0"]	1	1	3	1	0 ²	1	45.5	91
PSA1104N	AP-2-UF-3500.165M [GA] [14'-0']	1	1	3	1	0 ²	1	45.5	91
PSA1213N	AP-2-UF-4000.219 [P] [14'-0']	1	1	3	1	NA	NA	49	98
PSA2977N	AP-2-UF-4000.219 [G] [14'-0']	1	1	3	1	NA	NA	49	98
Notes:									
1 P = Plain Ste	P = Plain Steel, A = Flow Coat Corrosion Protection, G = Hot Dipped Galvanized, M = Modified Pier								
Plain Pier Sleeves are not included in Item Nos: PSA1094N and PSA1104N and are only used if soil conditions warrant									

1. BRACKET MATERIAL FINISH AVAILABLE IN PLAIN [P] OR HOT DIP

3. ALL WELDING TO BE DONE BY WELDERS CERTIFIED UNDER SECTION 5 OF THE AWS CODE D1.1.

4. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES. 5. SEE ICC-ES EVALUATION SERVICE, INC. EVALUATION REPORT NO. NER-579 FOR THE AP-2-UFB-3500 AND 3500M SYSTEMS.

6. TWO 5/8 DIA PIER PINS (PART# PSA1030) CONFORMING TO ASTM A29

GRADE 10B21 ARE REQUIRED FOR EACH PIER.

7. LIFT SHIMS (PART# PSA1031 DR PSA1032) SHALL BE USED AS REQUIRED UP TO A MAXIMUM HEIGHT OF 4 INCHES.

8. REFER TO DRAWING SA1002N FOR TOP PIER PLATFORMS.

9. REFER TO DRAWING SA1003 FOR PIER SECTIONS.

