


## **NOTES**

- 1. FINISH: GALVANIZED PER ASTM A123 (LATEST REVISION)
- 2. MATERIAL:
  - A. PLATE: PLATE STEEL PER ASTM A572 GRD 50
  - B. PILE TUBES: HSS 10X10X3/8 PER ASTM A500 GRD B, MIN 50 KSI
- 3. SEE HARDWARE PACKAGE SA TO DETERMINE HARDWARE PACKAGE NEEDED. FOR RS4500.337 USE SA1101707 AND FOR RS3500.300 USE SA1101708
- 4. ESTIMATED WEIGHT: 1,900 LBS

FORGED ROD WITH

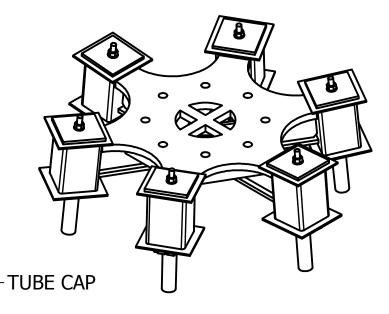

SQUARE TUBE FILLED WITH NONSHRINK GROUT MINIMUM 4000 PSI COMPRESSIVE STRENGTH \*PROVIDED BY OTHERS\*

**SECTION A-A** 



**CLAMP** 

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS, HUBBEL POWER SYSTEMS UNPUBLISHED ALL RIGHTS

HUBBELL POWER SYSTEMS, INC.

GRILLAGE, 300-500 KIP-FT

CAT / PART / ASSY NO. C1101943 SA1101943 В

DRN BY TRH

DATE 4/23/2020

SHEET 1 OF 1