
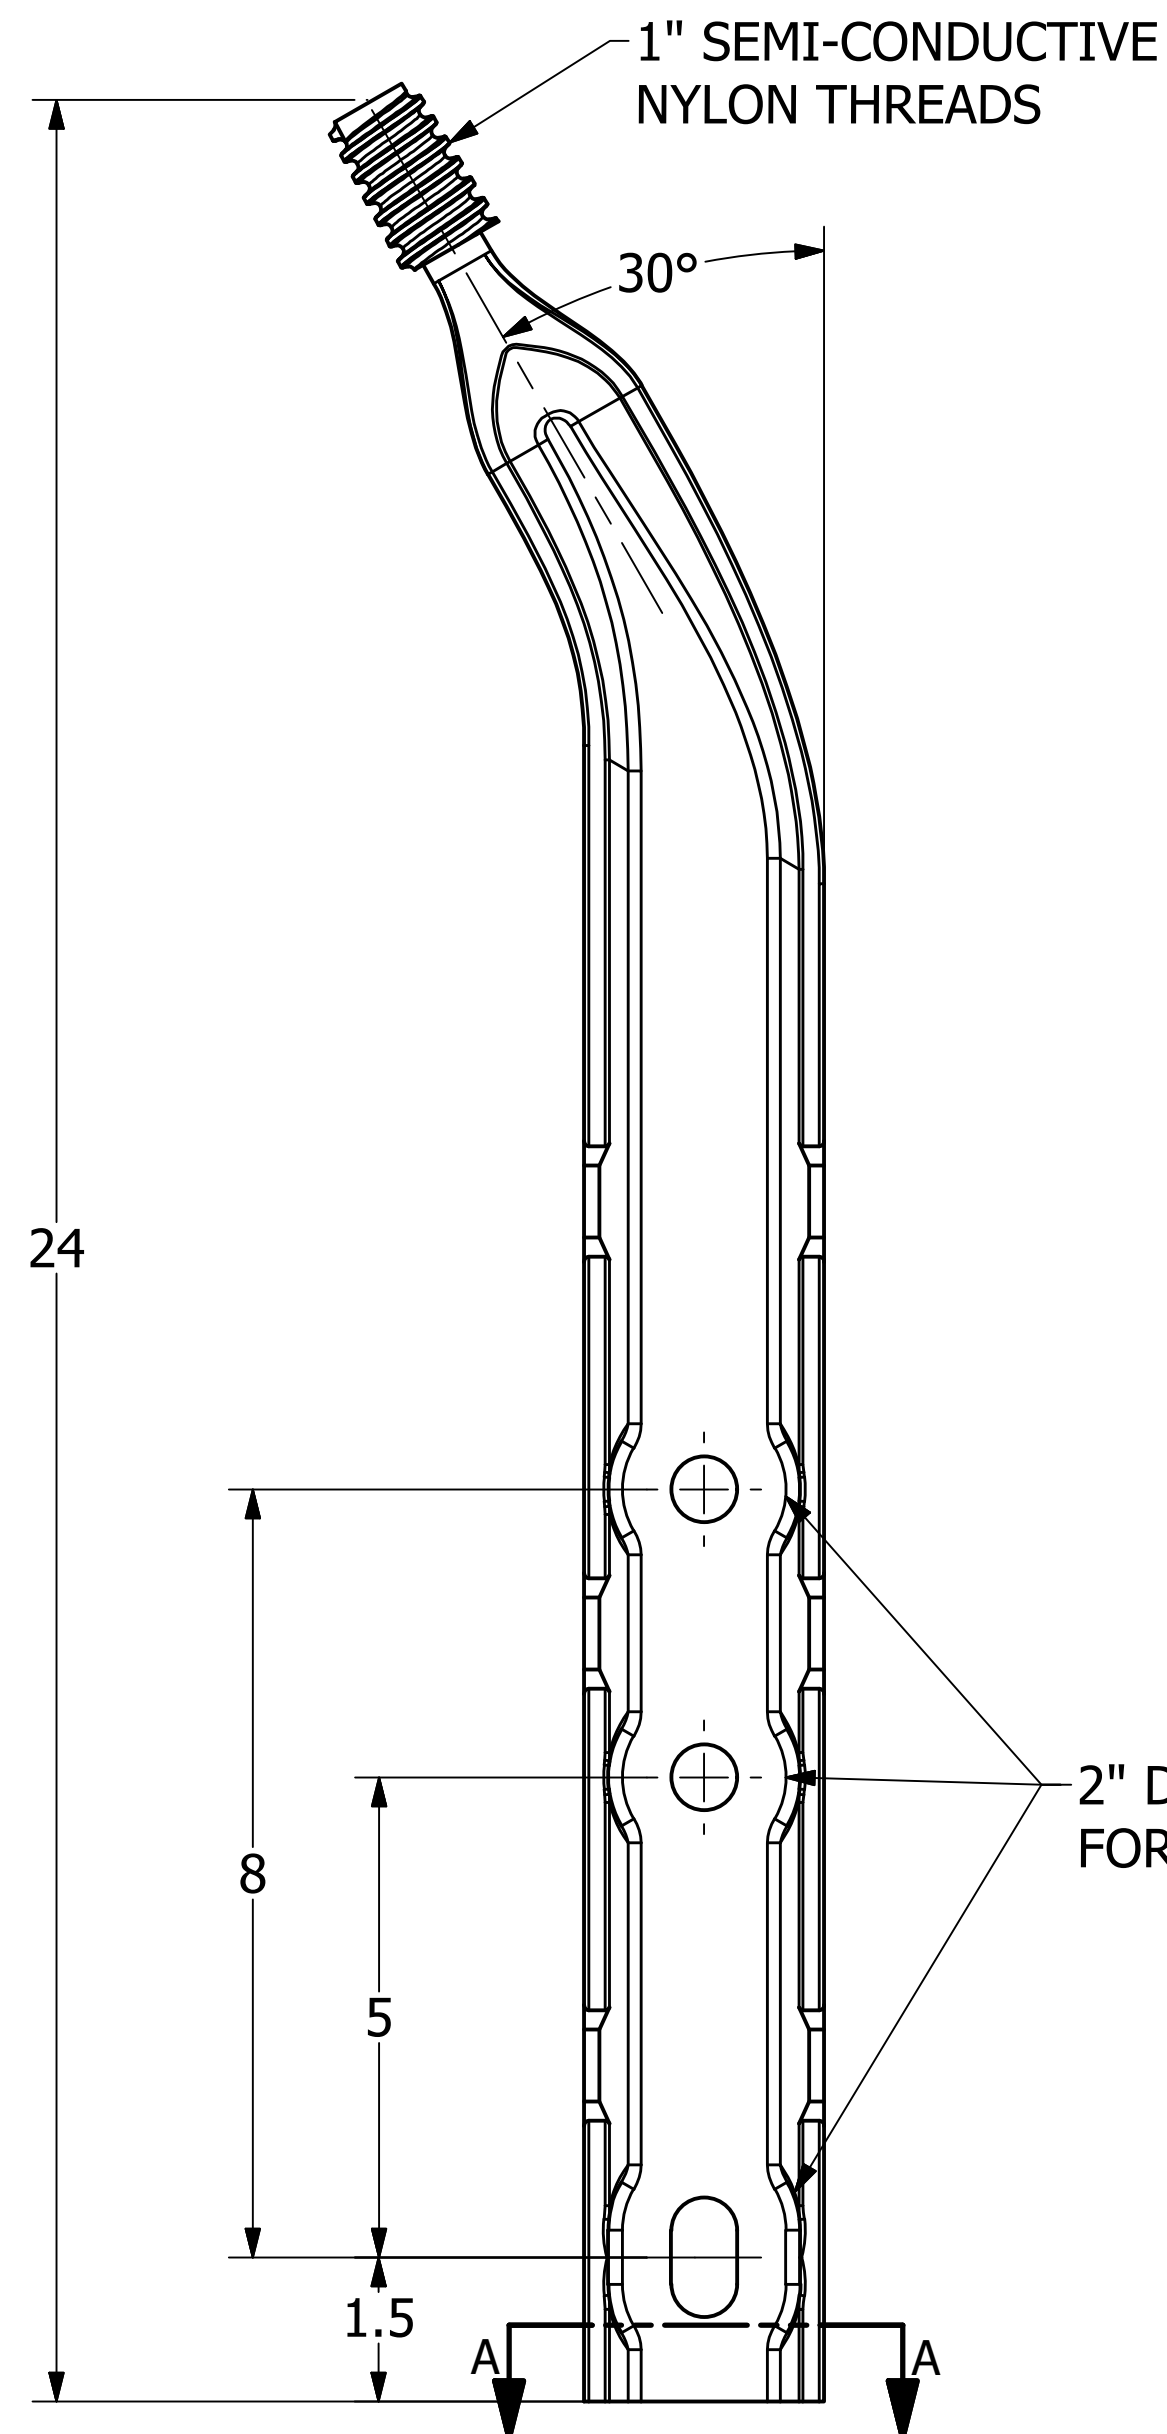


- NOTES -


1. MATERIAL: DUCTILE IRON PER ASTM A-537
2. HOT DIP GALVANIZE PER ASTM A153 (LATEST REV.)

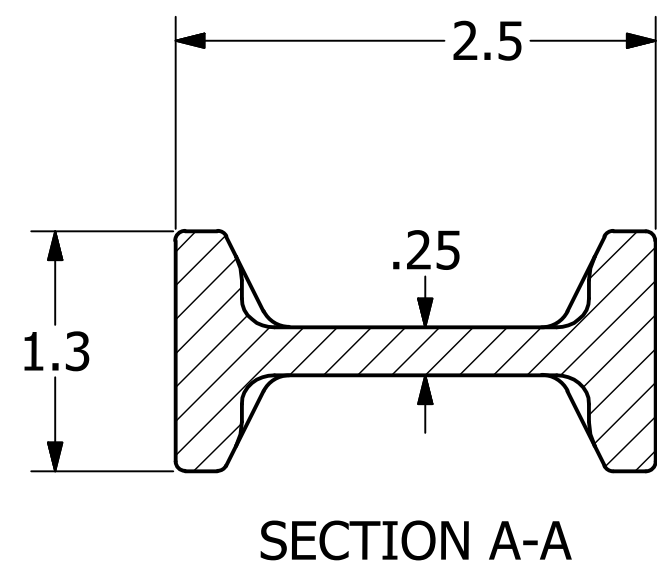

11/16" DIA HOLE
2X

11/16 X 1-1/4 SLOT

2" DIA. CUTOUTS
FOR SOCKET

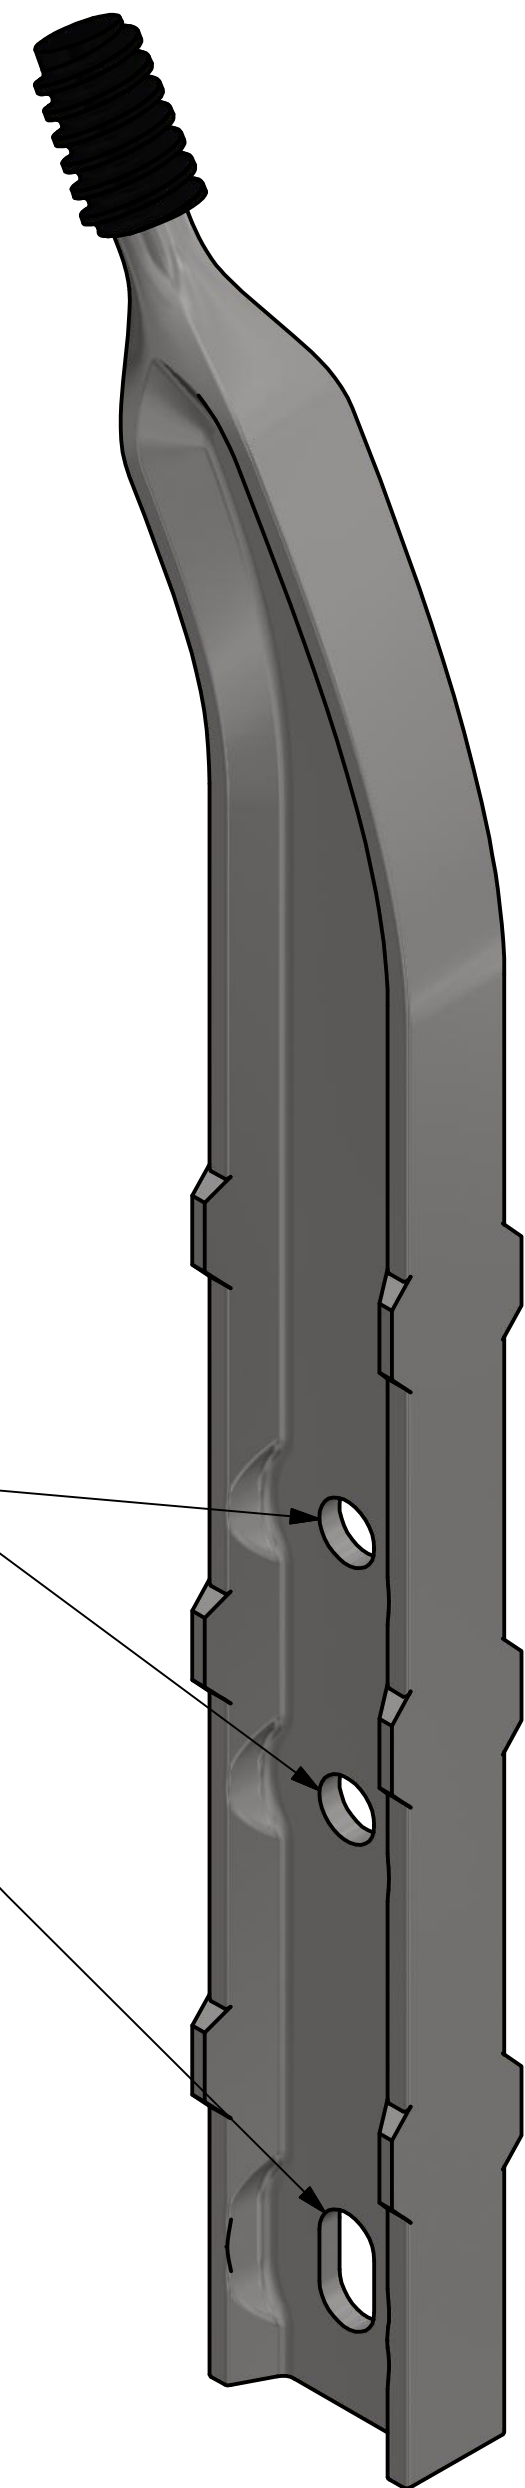

THIS SYMBOL IDENTIFIES
CRITICAL FEATURES

CATALOG NUMBER: PSC2061085P

CHANCE® TOLERANCE CHART .X ± .060 FRAC ± 1/16 ANGLES ± 2° .XX ± .030 ADD DRAFT (UNLESS NOTED) .XXX ± .005 CASTINGS 3" FORGINGS 7"		HUBBELL POWER SYSTEMS, INC. POWER SYSTEMS, INC.	
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		TITLE NYLON THREAD ANGLED POLE TOP PIN	
SIZE C	CAT / PART / ASSY NO. PSC2061085P	DWG NO. SA2061085P	REV B
DO NOT SCALE THIS DRAWING	DRN BY TLB	DATE 4/15/19	SHEET 1 OF 1