
## -NOTES-

- 1. SUSPENSION CLAMP FOR JACKETED STRANDS (FIGURE 8 CABLE), 1/4" and 3/8" BARE MESSENGER WIRE. SERPENTINE GROOVES IN THE MOUNTING PLATES PROVIDE SUPERIOR HOLDING STRENGTH OF INSULATED MESSENGER WIRE.
- 2. ACCOMODATES 5/8" DIAMETER POLE MOUNTING BOLT.
- 3. SUPPLIED WITH (2) 5/8" TRACK BOLTS/SQUARE NUTS.
- 4. DUCTILE IRON PER ASTM A536, GALVANIZED PER ASTM A153.
- 5. MEETS TELECORDIA GR-3174-CORE; BELLCORE SPECIFICATION AT-8261.



CATALOG NO.: PSC2080296

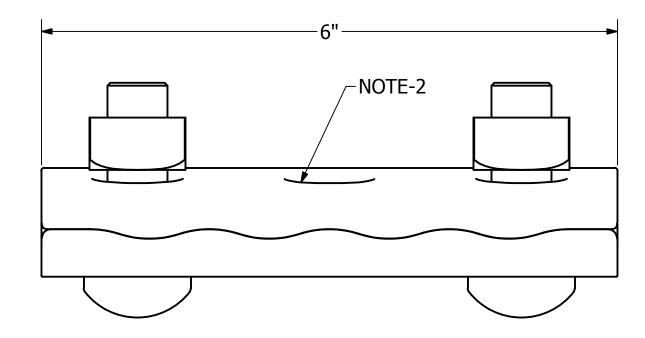