


NOTES

1. MATERIAL: STEEL
2. FINISH: HOT DIP GALVANIZED PER ASTM A153
3. BOLTS MEET ANSI C135.1 WITH MINIMUM TENSILE STRENGTH OF 18,350 LBS
4. CATALOG NUMBERS WITH A "USA" SUFFIX HAVE ALL COMPONENTS MELTED AND MANUFACTURED IN THE USA.

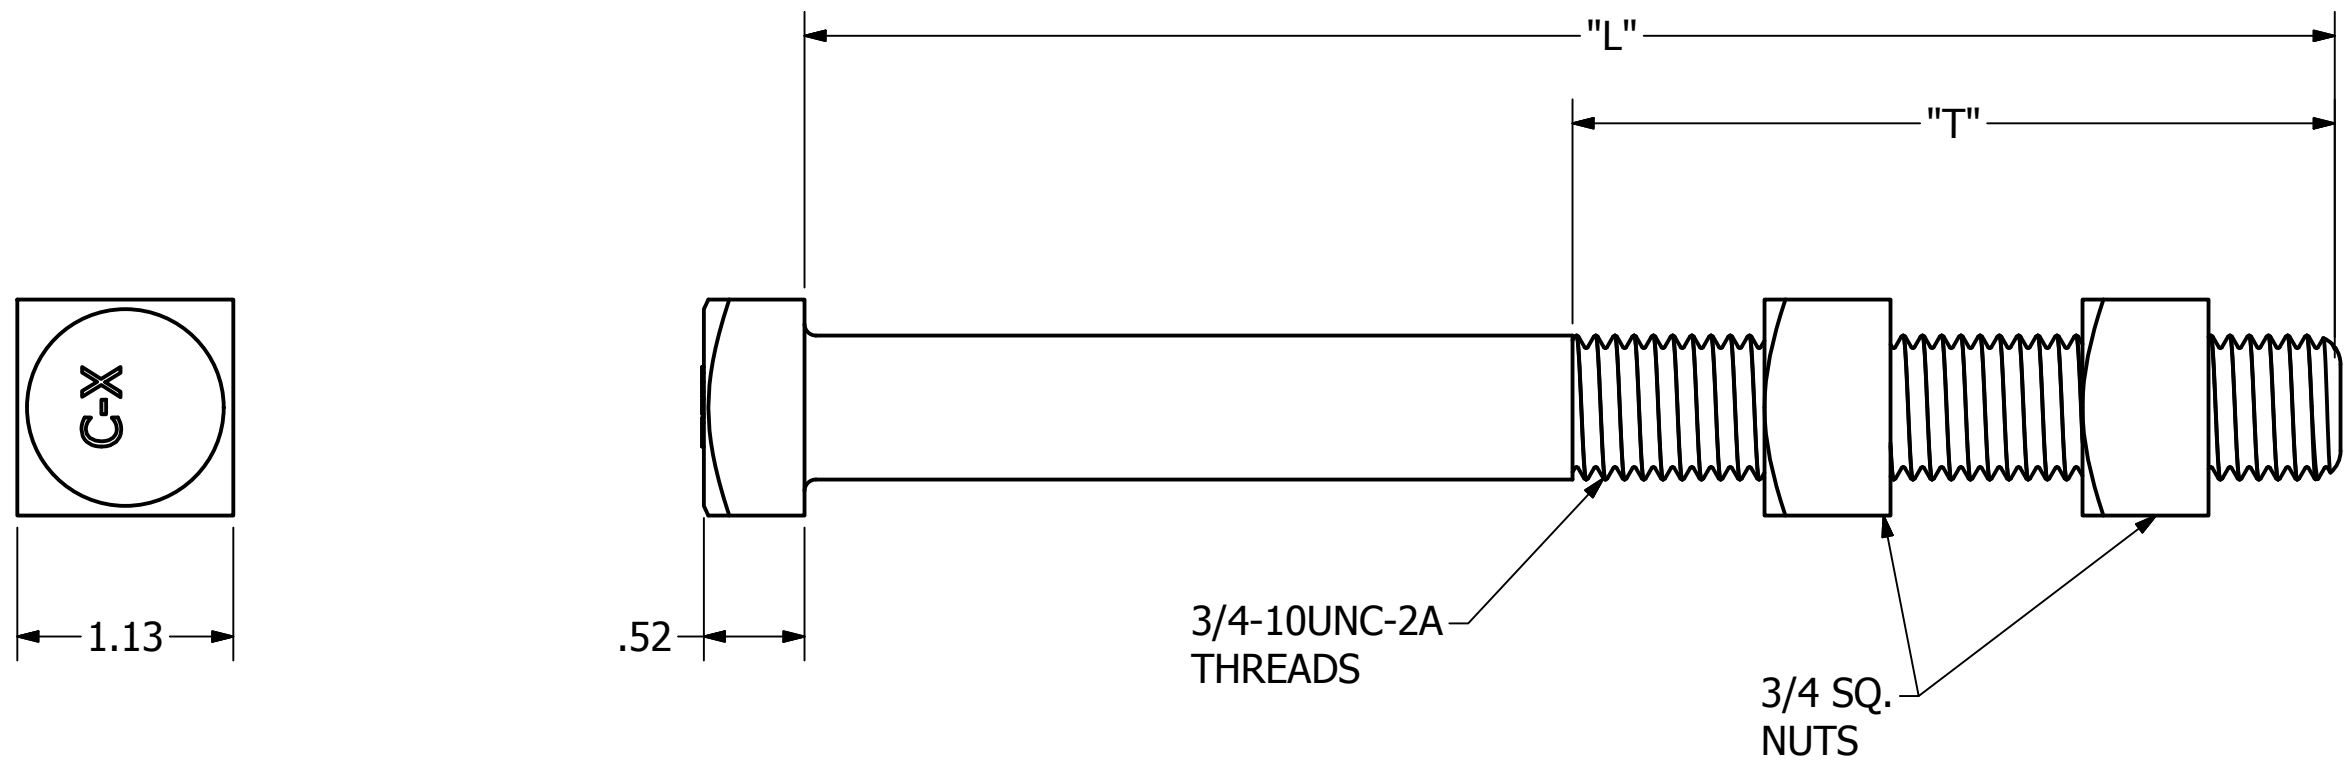

CATALOG NO.	"USA" CATALOG NO.	"L"	"T"
400013728	400013728USA	10	6
400013736	400013736USA	12	6
400013744	400013744USA	14	6
400013751	400013751USA	16	6
400013769	400013769USA	18	6
PSC2050824		20	6
400013022		22	6
400013024		24	6

CHANCE ®	HUBBELL®	HUBBELL POWER SYSTEMS, INC.		
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		TITLE BOLTS, 3/4" MACHINE		
DO NOT SCALE THIS DRAWING	DRN BY WILSON	DATE 03/12/19	SHEET 1 OF 1	REV B
SIZE B	CAT / PART / ASSY NO. SEE CHART	DWG NO. SA400013728		