
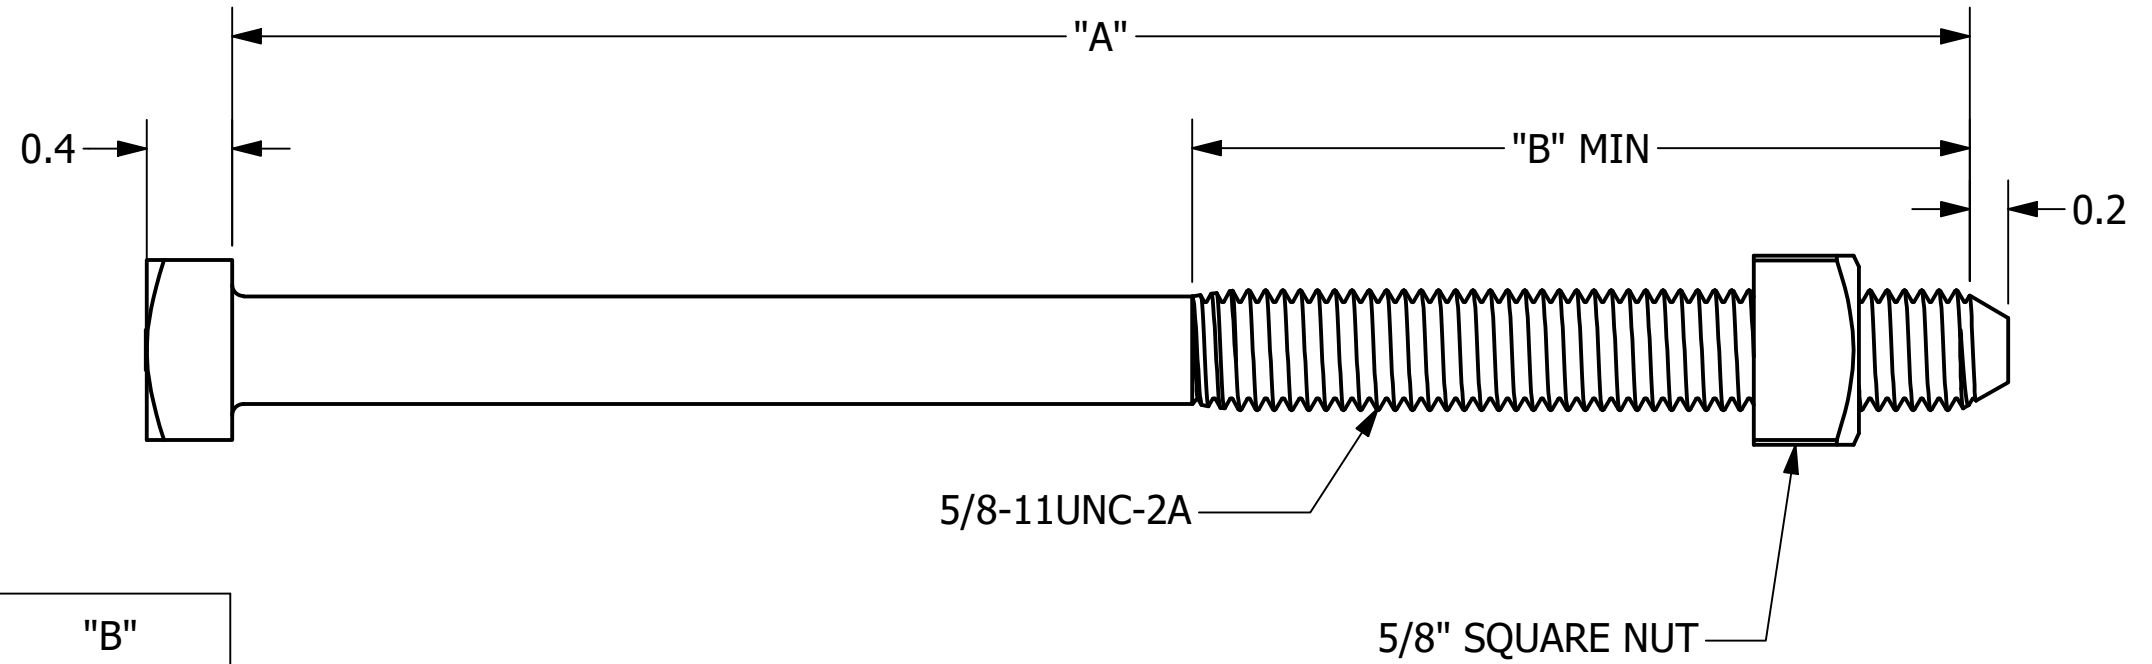


MANUFACTURER'S IDENTIFICATION

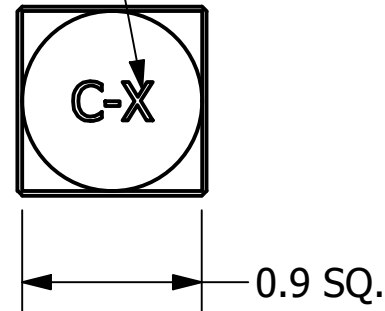

CATALOG NUMBER	"A"	"B"
8802TDG	2	1.5
PS8803TDG	3	1.5
8804TDG	4	3
8805TDG	5	3
8806TDG	6	3
8807TDG	7	4
8808TDG	8	4
8809TDG	9	4
8810TDG	10	6
8812TDG	12	6
8814TDG	14	6
8816TDG	16	6
8818TDG	18	6
8820TDG	20	6
8822TDG	22	6
8824TDG	24	6
8826TDG	26	6
8828TDG	28	6

- NOTES -

- MATERIAL: STEEL. STRENGTH AND DIMENSIONS PER IEEE. C135.1 INCLUDING THE FOLLOWING:  
- MINIMUM ASSEMBLY TENSILE STRENGTH OF 12,400 LBS.
- FINISH: AMORGALV® THERMO-DIFFUSION GALVANIZING PER ASTM 1059.

<b>CHANCE</b> ®	<b>HUBBELL</b> ® HUBBELL POWER SYSTEMS, INC. <small>POWER SYSTEMS, INC.</small>			
	TITLE <b>5/8" MACHINE OR CROSSARM BOLT</b>			
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	SIZE <b>B</b>	CAT / PART / ASSY NO. <b>SEE TABLE</b>	DWG NO. <b>SA8806TDG</b>	REV <b>C</b>
	DO NOT SCALE THIS DRAWING	DRN BY TOLIVER	DATE 12/12/22	SHEET 1 OF 1