





ONE-50 FT REEL

CUT STRAP AS SHOWN BELOW TO AVOID SHARP EDGES

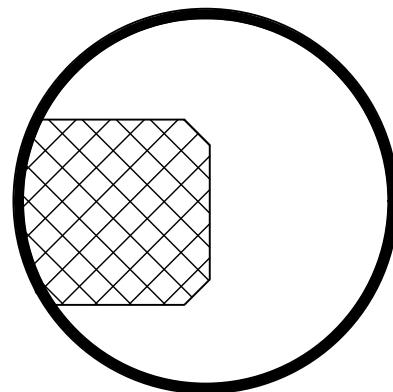


Note: Protective eyewear should be worn during installation

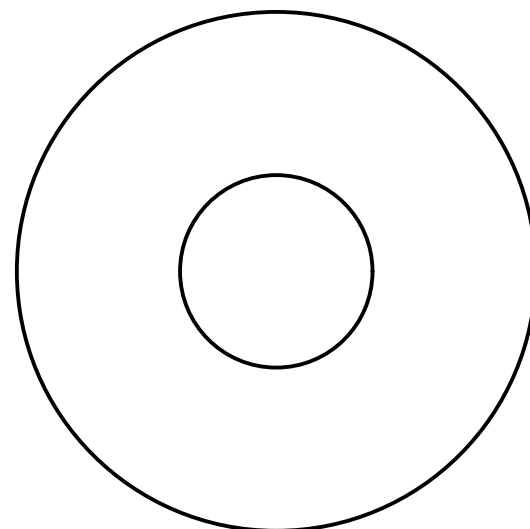


PART NO.: C50PLLC

CUT STRAP FLUSH WITH LOCKING HEAD AS SHOWN BELOW

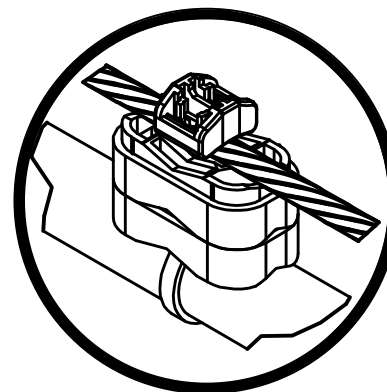

MADE IN CHINA

- NOTES-
1. USE WITH CBPLLC STRAP BUCKLE TO SECURE AERIAL CABLE TO MESSENGER STRAND OR OTHER CABLES. USE PSC2170130 STRAP TENSIONING TOOL FOR TENSIONING AND CUTTING EXCESS STRAP MATERIAL.
 2. LOOP TENSILE STRENGTH 250 LBS.
 3. MATERIAL: BLACK ACETAL. UV RESISTANT, HALOGEN FREE.

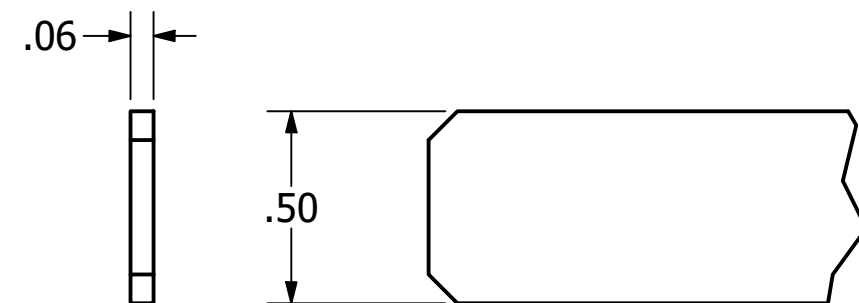

STRAP DETAILS

CATALOG NUMBER: C50PLLC

(Ø8.5)

CHANCE®



HUBBELL POWER SYSTEMS, INC.

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

TITLE STRAP REEL, 50 FT LASHING			
SIZE B	CAT / PART / ASSY NO. C50PLLC	DWG NO. SAC50PLLC	REV D
DO NOT SCALE THIS DRAWING	DRN BY HOEK	DATE 10/18/23	SHEET 1 OF 1