



RS2875. 276 LEAD

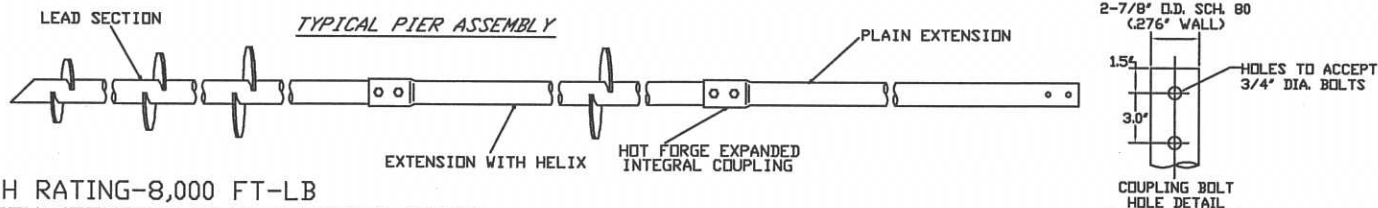

TORQUE STRENGTH RATING-8,000 FT-LB
 ULTIMATE CAPACITY*(TENSION/COMPRESSION)-72KIP
 *BASED ON A TORQUE FACTOR (Kt)=9
 SINGLE HELIX ULTIMATE STRENGTH-60 KIP
 ULTIMATE TENSION AND COMPRESSION
 STRENGTH 90 KIP

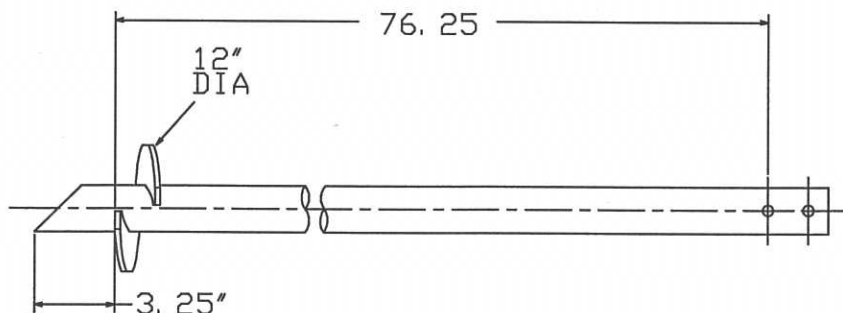

-NOTES-

1. HOT DIP GALVANIZED PER ASTM 153-(LATEST REVISION)
2. SECTION LENGTHS AND HELIX SPACINGS ARE NOMINAL,
3. HELIX MATERIAL LOW CARBON STEEL MEETING THE GENERAL REQUIREMENTS OF AISI, OR ASTM A656, OR A1018; 3/8\"
5. PIPE SHAFT MATERIAL 2.5\"
6. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES.
7. ALL WELDING TO BE DONE BY WELDERS CERTIFIED UNDER SECTION 5 OF THE AWS CODE D1.1.

CATALOG NUMBER: CRSLBCFFF07

CHANCE HELICAL		HUBBELL POWER SYSTEMS	
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS, INC. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE PRIOR WRITTEN CONSENT OF HUBBELL POWER SYSTEMS, INC. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		RS2875.276 MULTI-HELIX LEADS AND HELICAL EXTENSIONS	
SIZE	DWG NO.	REV	
A	SACRSLBCFFF07		
DO NOT SCALE THIS DRAWING	DRN BY JWH	DATE 1/17/17	SHEET 10F1