


=NOTES=

1. MATERIAL: STEEL CONFORMING TO THE FOLLOWING PROPERTIES:
 - AVERAGE MINIMUM ABSORPTION OF 20J WHEN TESTED AT -20° PER ASTM A370.
 - MINIMUM BOLT STRENGTH CLASS 4.6 PER ASTM F568M.
 - MUST BE GALVANIZABLE (SILICON 0 - .04 OR .15% - .25%).
2. ZINC COATING: HOT DIP GALVANIZE PER CSA G164M (LATEST REVISION).

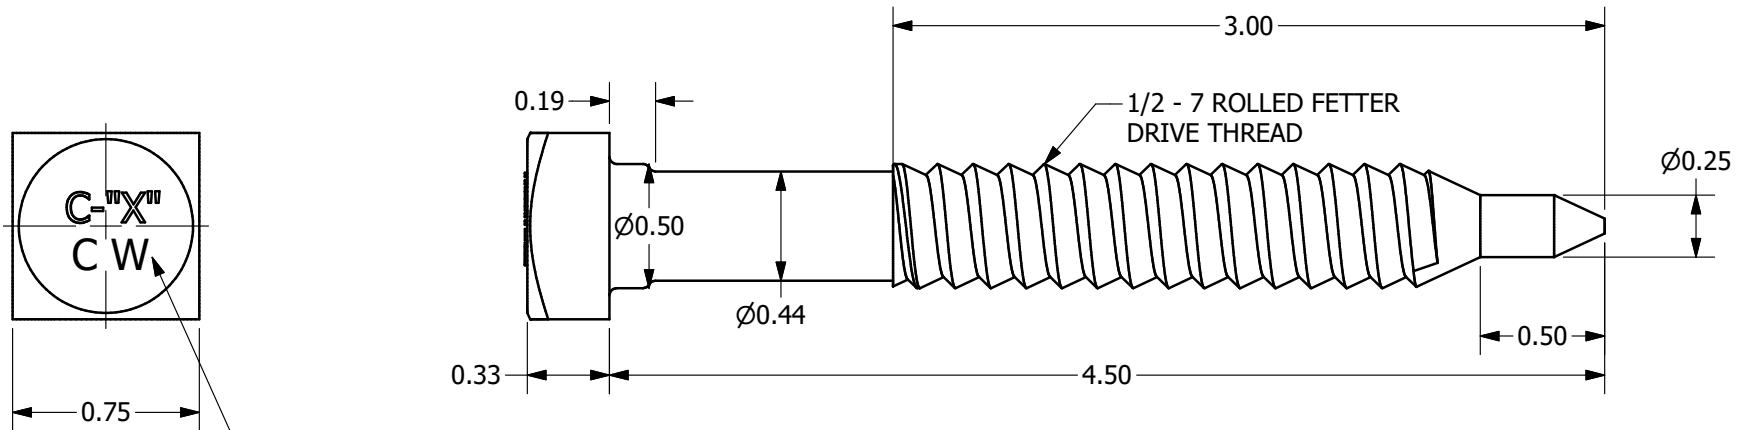

STAMP WITH C-X AND CW, WHERE X IS THE MANUFACTURER'S SYMBOL

CATALOG NUMBER: PS508754CW

CHANCE ®		HUBBELL POWER SYSTEMS, INC.	
<small>CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS, HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>			
TITLE			
FETTER DRIVE LAG SCREW (COLD WEATHER)			
<small>SIZE</small>	<small>CAT / PART / ASSY NO.</small>	<small>DWG NO.</small>	<small>REV</small>
B	PS508754CW	SAPS508754CW	A
<small>DO NOT SCALE THIS DRAWING</small>		<small>DRN BY</small> JRT	<small>DATE</small> 02/01/24
			<small>SHEET</small> 1 OF 1