
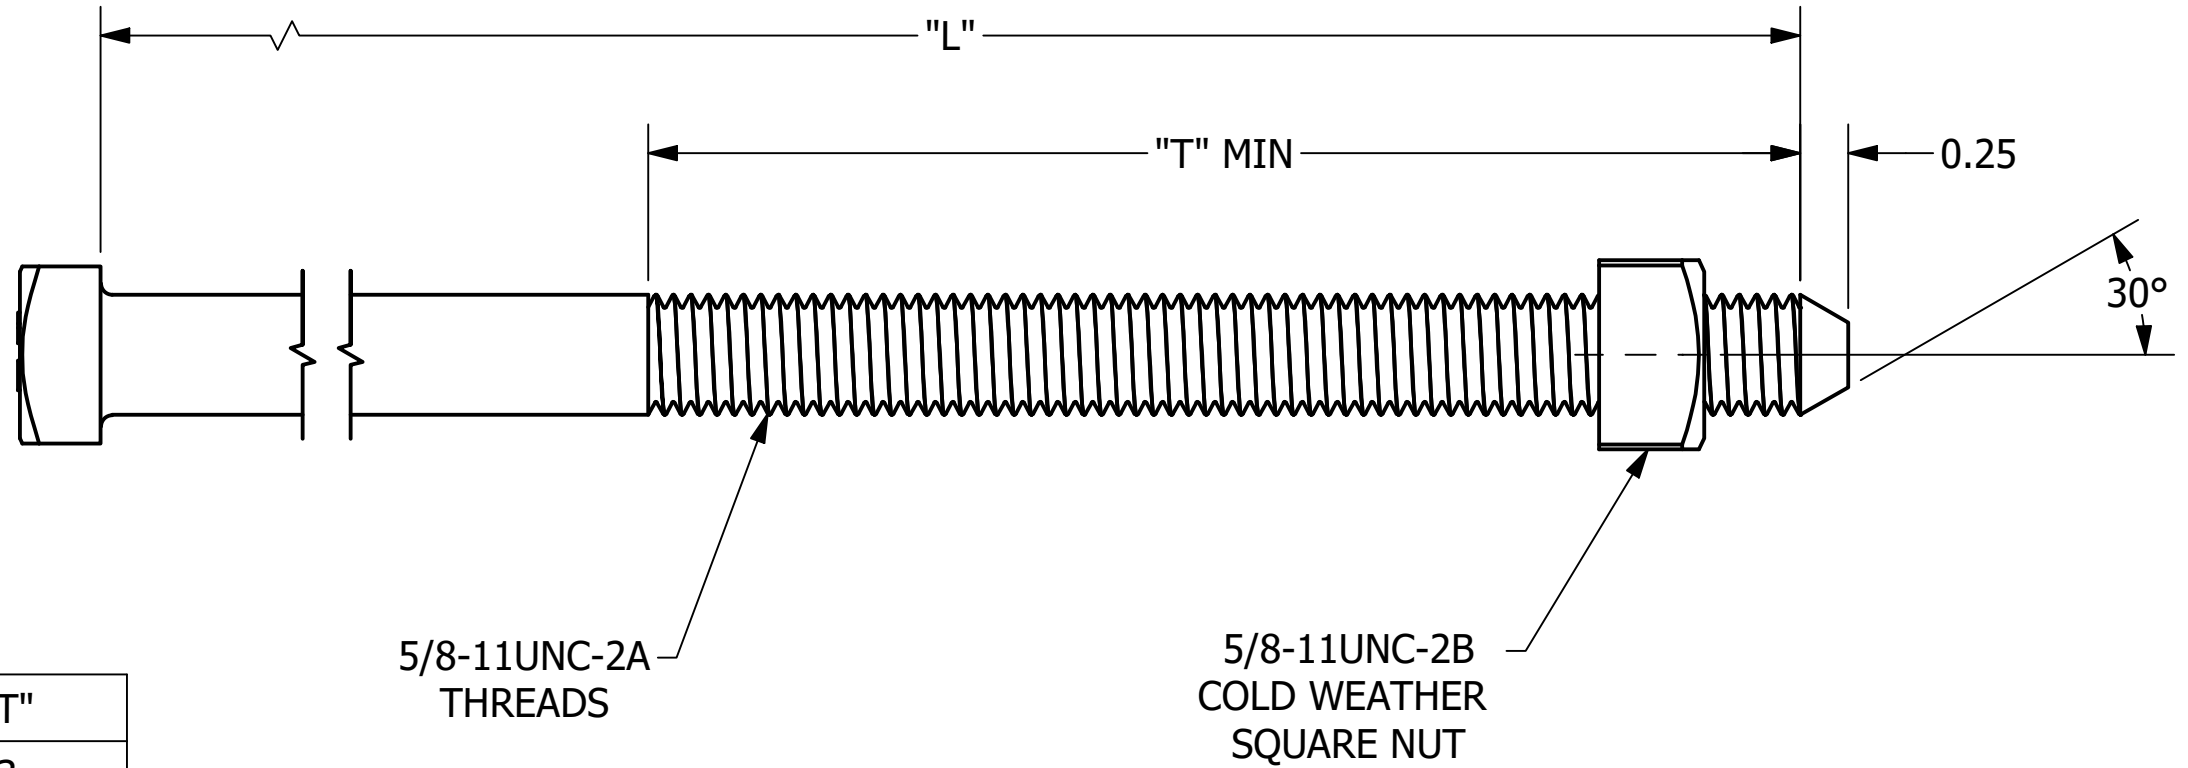


BOLT HEADS WILL HAVE MANUFACTURER'S ID MARK AND A "CW" MARK FOR COLD WEATHER APPROVED BOLTS



CATALOG NUMBER	"L"	"T"
PS8805CW	5	3
PS8806CW	6	3
PS8807CW	7	4
PS8808CW	8	4
PS8809CW	9	6
PS8810CW	10	6
PS8812CW	12	6
PS8814CW	14	6
PS8816CW	16	6
PS8818CW	18	6
PS8820CW	20	6
PS8822CW	22	6
PS8824CW	24	6
PS8826CW	26	6
PS8828CW	28	6

- NOTES -

- MATERIAL: STEEL CONFORMING TO THE FOLLOWING PROPERTIES:
 - AVERAGE MINIMUM ENERGY ABSORPTION OF 20J WHEN TESTED AT -20°C PER ASTM A370.
 - MINIMUM ASSEMBLY BREAKING STRENGTH OF 60.3KN (13,556 LBS) WHEN TESTED PER ASTM F606.
 - UNTHREADED PORTION CAPABLE OF BEING BENT (COLD) AROUND A MANDREL WITHOUT CRACKING.
 - BOLT HEAD MUST WITHSTAND AN IMPACT BLOW AT A TEMPERATURE OF -20°C OR BELOW, PRODUCING A PERMANENT DEFORMATION OF 5° RELATIVE TO THE BOLT AXIS WITHOUT ANY CRACKS OCCURRING.
 - CHEMICAL COMPOSITION PER CSA C83.
- FINISH: HOT DIP GALVANIZED PER CSA G164.
- NUT DIMENSIONS PER ASME/ANSI B18.2.2.
- BOLTS 8" LONG AND UNDER SHALL BE AS SHOWN IN ASME B18.2.1 (LIMITED OR NO CHAMFER).

CHANCE [®]	HUBBELL [®] HUBBELL POWER SYSTEMS, INC.		
	POWER SYSTEMS, INC.		
TITLE BOLT, MACHINE, 5/8" (COLD WEATHER CSA)			
SIZE B	CAT / PART / ASSY NO. SEE TABLE	DWG NO. SAPS8812CW	REV A
DO NOT SCALE THIS DRAWING	DRN BY TOLIVER	DATE 7/14/21	SHEET 1 OF 1

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.