



- NOTES -

1. LOAD RATINGS ARE LISTED IN THE TABLE BELOW. THE RECOMMENDED MAXIMUM WORKING LOAD IS 50% OF THE MINIMUM ULTIMATE RATINGS LISTED.

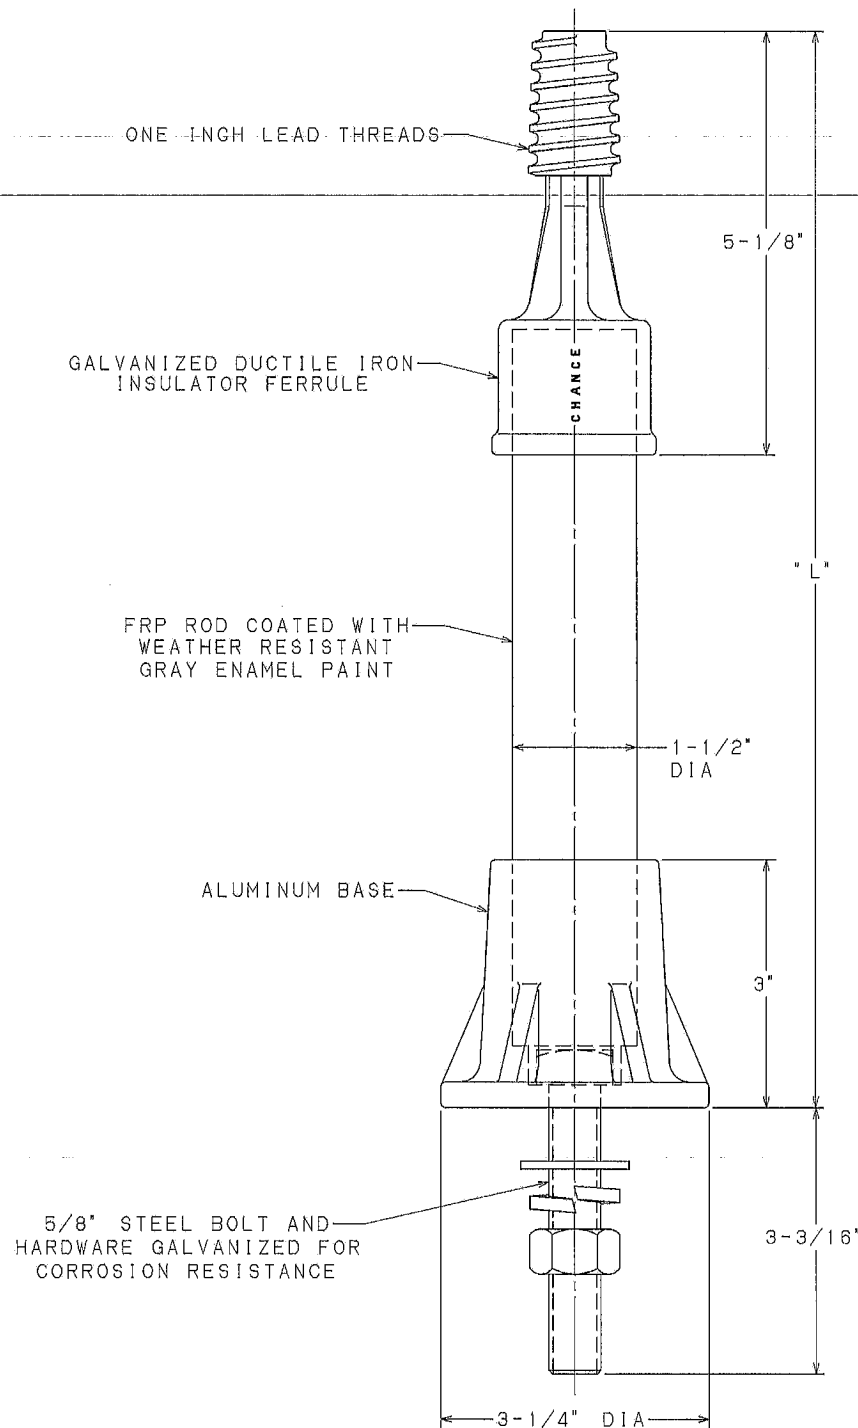

SEE TABLE BELOW AND NOTE 1 FOR RATINGS

CATALOG NO.	"L"	MINIMUM ULTIMATE RATING (LBS)	
		VERTICAL "V"	CANTILEVER "C"
1XPM133	13.0	2500	1200
1XPM183	18.0	2500	1000

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL / A. B. CHANCE COMPANY. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT WRITTEN CONSENT BY HUBBELL / A. B. CHANCE COMPANY. © 2000 HUBBELL/A. B. CHANCE. UNPUBLISHED - ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS

LATEST EC NO:		REV.	DATE	CHANGED BY	RESP ENGINEER
97010703		-	-----	---	WEST
DO NOT SCALE THIS DWG					THIRD ANGLE PROJECTION
150 DUAL DIMENSIONS IN=INCH, MM=MILLIMETER					
DRN BY:	DATE	TITLE:			SIZE
M. E. C.	1-9-97	CROSSARM PIN			C
HUBBELL POWER SYSTEMS		CHANCE		CAE CAD CAM	DWG NO: SA1XPM133