M-8786 1

HUBBELL MODEL	A	B	C	D	E	F	G	H	I	J	K	WEIGHT (OZ.)
AAB08	25.4 (1.00)	31.8 (1.25)	31.8 (1.25)	8.74 (.344)	7.92 (.312)	5.54 (.218)	15.9 (.625)	11.9 (.468)	7.14 (.281)	1.78 (.070)	9.53 (.375)	0.6
AAB12	38.1 (1.50)	34.8 (1.37)	38.1 (1.50)	12.7 (0.50)	13.9 (0.55)		19.1 (0.75)	14.3 (.563)	7.92 (.312)		12.7 (0.50)	1
AAB18	50.8 (2.00)		44.5 (1.75)	18.3 (0.72)	19.1 (0.75)		25.4 (1.00)	14.3 (.563)	7.92 (.312)		15.9 (.625)	1.3
AAB22				22.2 (.876)	17.4 (.685)							1.1
AAB30	63.5 (2.50)	44.5 (1.75)	57.2 (2.25)	30.1 (1.19)	23.0 (0.91)	7.14 (0.28)	34.8 (1.37)	20.6 (.812)	10.3 (.406)	2.29 (.090)	19.1 (0.75)	2.1
AAB47	88.9 (3.50)	50.8 (2.00)	63.5 (2.50)	47.5 (1.87)	38.1 (1.50)		38.1 (1.50)	22.2 (0.88)	12.7 (.500)	3.05 (0.12)		3.8

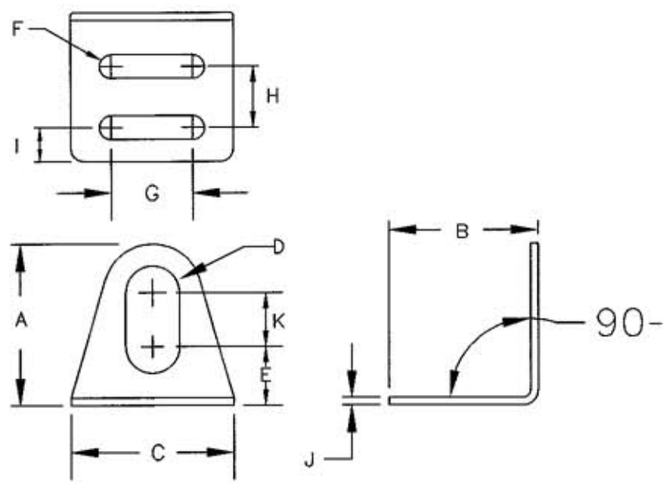



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm (INCHES)

NOTE:
1. All Brackets are stainless steel except AAB47 which is zinc plated steel.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
SEE NOTE		

DIMENSION SHEET FOR CAT. NO. SEE NOTE

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
1	5/2/02 "X" REMOVED; LAST "X" REVISION WAS X-0. RELEASED FOR PRODUCTION PER DCN #9320. GDR MJL	MJL	5/23/02

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

RIGHT ANGLE BRACKETS, ZINC/CRS

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY GDR	APP. BY MJL
TR. BY	SCALE NONE
CHK'D BY	DATE 5/2/02

M-8786

B

1