M-13609 | 1

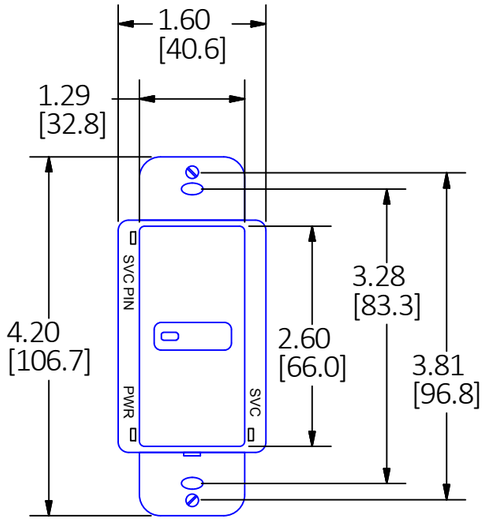

DSM30x1P
SERIES

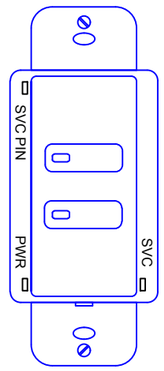

DSM30x2P
SERIES

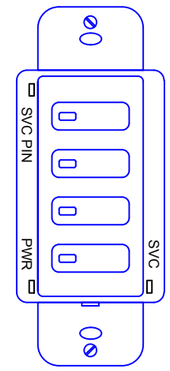

DSM30x4P
SERIES

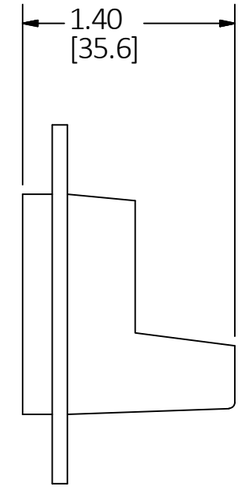

NOTES:
1. LOW VOLTAGE DEVICES: 24 VDC.
2. FOR INDOOR USE ONLY,
   OPERATING TEMPERATURE: 32°F TO 104°F [0°C TO 40°C];
   RELATIVE HUMIDITY (NON-CONDENSING): 0 TO 95%.
3. SWITCHES CAN BE MOUNTED TO SINGLE OR
   MULTI-GANG STANDARD WALL BOXES.
4. ALL DIMENSIONS ARE IN INCHES [mm].

SWITCH TYPE	CATALOG #	DESCRIPTION	COLOR
1 BUTTON	DSM30W1P	LOW VOLTAGE SWITCH, 1 BUTTON, W/PILOT, WH	WHITE
	DSM30I1P	LOW VOLTAGE SWITCH, 1 BUTTON, W/PILOT, IV	IVORY
	DSM30LA1P	LOW VOLTAGE SWITCH, 1 BUTTON, W/PILOT, LA	LIGHT ALMOND
	DSM30GY1P	LOW VOLTAGE SWITCH, 1 BUTTON, W/PILOT, GY	GRAY
2 BUTTONS	DSM30W2P	LOW VOLTAGE SWITCH, 2 BUTTON, W/PILOT, WH	WHITE
	DSM30I2P	LOW VOLTAGE SWITCH, 2 BUTTON, W/PILOT, IV	IVORY
	DSM30LA2P	LOW VOLTAGE SWITCH, 2 BUTTON, W/PILOT, LA	LIGHT ALMOND
	DSM30GY2P	LOW VOLTAGE SWITCH, 2 BUTTON, W/PILOT, GY	GRAY
4 BUTTONS	DSM30W4P	LOW VOLTAGE SWITCH, 1 BUTTON, W/PILOT, WH	WHITE
	DSM30I4P	LOW VOLTAGE SWITCH, 1 BUTTON, W/PILOT, IV	IVORY
	DSM30LA4P	LOW VOLTAGE SWITCH, 1 BUTTON, W/PILOT, LA	LIGHT ALMOND
	DSM30GY4P	LOW VOLTAGE SWITCH, 1 BUTTON, W/PILOT, GY	GRAY

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BASE	THERMOPLASTIC	BLACK
COVER	THERMOPLASTIC	COLOR PER CAT.# SEE TABLE.
BUTTON	THERMOPLASTIC	COLOR PER CAT.# SEE TABLE.

DIMENSION SHEET FOR CAT. NO.
SEE TABLE

REV	DESCRIPTION	APP	DATE
1	NEW RELEASE PER DCN #23043 EMD	SL	4/18/17

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE
LOW VOLTAGE SWITCHES WITH PILOT LIGHTS

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX= ± .005
ANGLE TOL. ±2°

DR. BY EMD
CHK. BY
SCALE NTS
DATE 4/18/17

B
M-13609
1

CAGE CODE 74545