M-13640 | 1

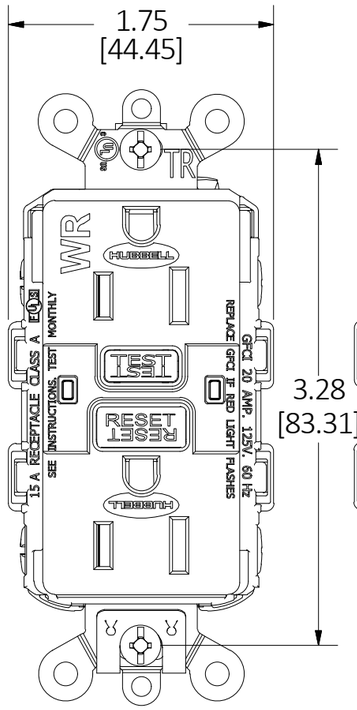

TYPICAL 15A DEVICE

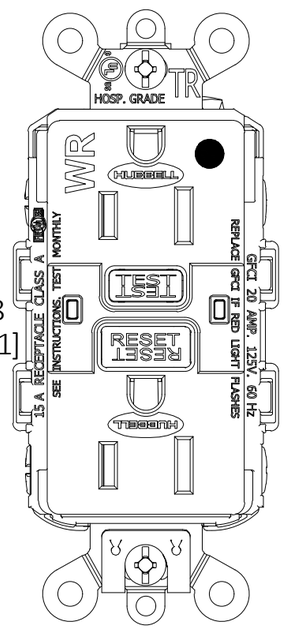

15A HOSPITAL GRADE DEVICE

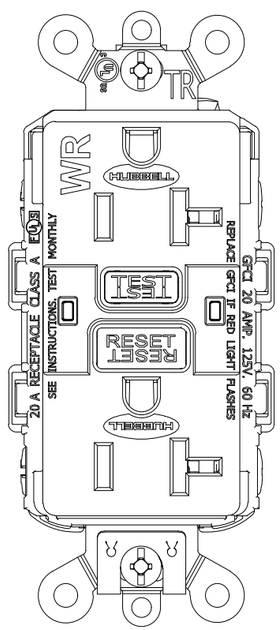

TYPICAL 20A DEVICE

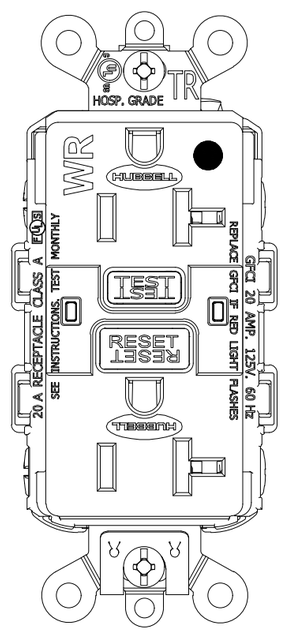

20A HOSPITAL GRADE DEVICE

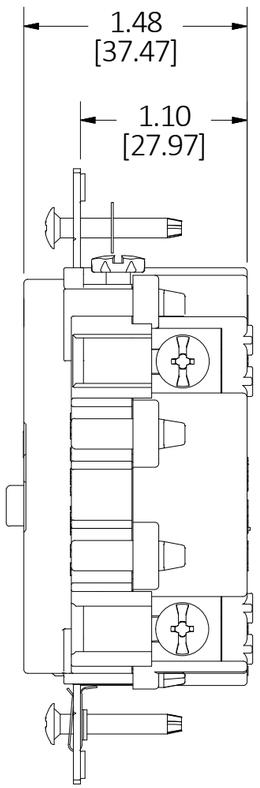

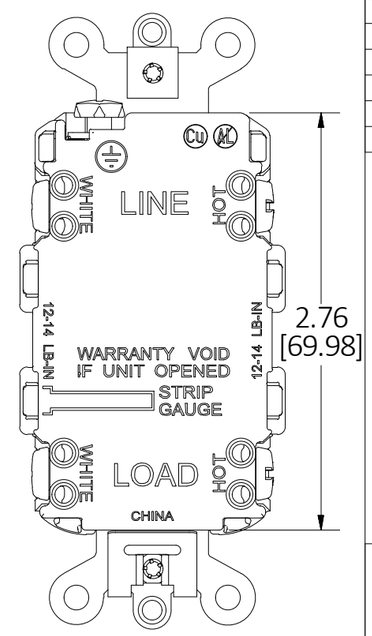

BACK MARKINGS TYPICAL

CONFIGURATION	BROWN	IVORY	WHITE	GRAY	BLACK	RED	YELLOW	RATING
15A TRWR FED. SPEC.	GF5262SG	GF5262SGI	GF5262SGW	GF5262SGGY	GF5262SGBK	GF5262SGR	GF5262SGYEL	15A, 125V
20A TRWR FED. SPEC	GF5362SG	GF5362SGI	GF5362SGW	GF5362SGGY	GF5362SGBK	GF5362SGR	GF5362SGYEL	20A, 125V
15A TRWR FED. SPEC HOSP. GRADE	GF8200SG	GF8200SGI	GF8200SGW	GF8200SGGY	GF8200SGBK	GF8200SGR	-	15A, 125V
20A TRWR FED. SPEC HOSP. GRADE	GF8300SG	GF8300SGI	GF8300SGW	GF8300SGGY	GF8300SGBK	GF8300SGR	-	20A, 125V

CAGE CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FACE	VALOX	
BRIDGE	BRASS	NICKEL PLATE
CONTACTS	BRASS	NICKEL PLATE
CLAMP PLATES	BRASS	NICKEL PLATE
BASE	ZYTEL101F	
SCREWS	STAINLESS STEEL	

REV	DESCRIPTION	APP	DATE
2	ADDED DIMENSION [83.31], MATERIAL OF FACE AND BASE HAVE BEEN CHANGED FROM PLASTIC TO VALOX AND PLASTIC TO ZYTEL101F PER DCN 24006	SRM	04/06/18
1	INITIAL RELEASE PER DCN23219	MJN	08/02/17

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE

CUSTOMER DWG. INDUSTRIAL GFR, FED. SPEC. TRWR, HG

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX= ± .005
ANGLE TOL. ±2°

DR. BY	MJN	SCALE	1 : 1
CHK. BY	KP	DATE	07/24/17

DIMENSION SHEET FOR CAT. NO.

B

M-13640

1