M12773 1

15AMP DEVICE

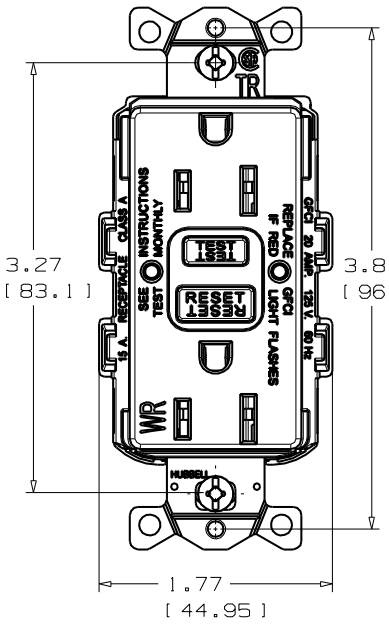

20AMP DEVICE

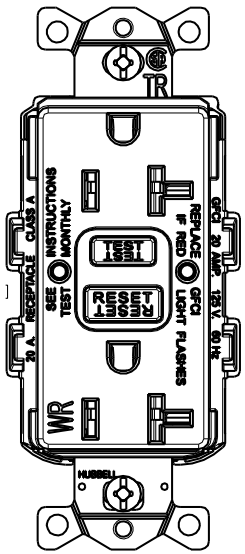

20AMP HOSPITAL GRADE
15AMP NOT SHOWN

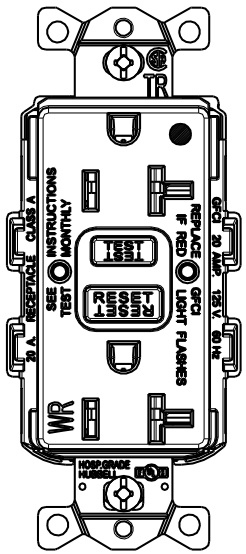

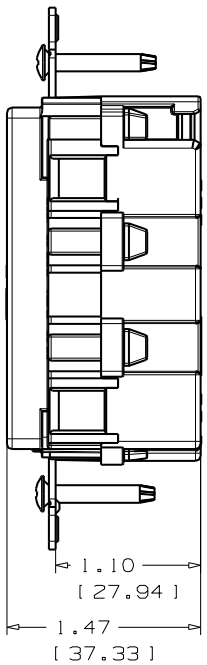

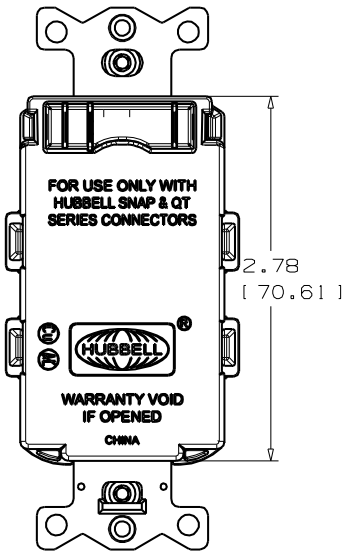

SNAPConnect TRWR GFCI								
BROWN	IVORY	WHITE	GRAY	BLACK	RED	ALMOND	LT ALMOND	RATING
GFTWRST15SNAP	GFTWRST15SNAPI	GFTWRST15SNAPW	GFTWRST15SNAPGY	GFTWRST15SNAPBK	GFTWRST15SNAPR	GFTWRST15SNAPAL	GFTWRST15SNAPLA	15A, 125V
GFTWRST20SNAP	GFTWRST20SNAPI	GFTWRST20SNAPW	GFTWRST20SNAPGY	GFTWRST20SNAPBK	GFTWRST20SNAPR	GFTWRST20SNAPAL	GFTWRST20SNAPLA	20A, 125V
SNAPConnect HOSPITAL GRADE TRWR GFCI								
GFTWRST82SNAP	GFTWRST82SNAPI	GFTWRST82SNAPW	GFTWRST82SNAPGY	GFTWRST82SNAPBK	GFTWRST82SNAPR	GFTWRST82SNAPAL	GFTWRST82SNAPLA	15A, 125V
GFTWRST83SNAP	GFTWRST83SNAPI	GFTWRST83SNAPW	GFTWRST83SNAPGY	GFTWRST83SNAPBK	GFTWRST83SNAPR	GFTWRST83SNAPAL	GFTWRST83SNAPLA	20A, 125V

NOTES:
1. DIMENSIONS IN INCHES [MM].
2. MEETS UL943 CLASS A GFCI'S AND UL498 FOR RECEPTACLES.
3.TERMINAL ACCOMADATIONS #14-10 AWG. STRANDED OR SOLID COPPER CONDUCTORS ONLY.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FACE	ZYTEL	
BRIDGE	STEEL	GALVANIZED
BRIDGE-HOSPITAL GRADE ONLY	BRASS	
CONTACTS	BRASS	
CONTACTS	BRASS	SILVER PLATED
CLAMP PLATES	BRASS	
BASE	ZYTEL	
MOUNTING SCREWS	SS	
BINDING SCREWS	STEEL	
SHUTTER MECHANISM	DELRIN	

SYM	REVISIONS	APP	DATE
1	INITIAL RELEASE PER DCN20694 AH 03/10/2015	KP	3/10/15

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
CUST DWG SNAPConnect GFR TWR 15 / 20 AMP

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY A.H	APP. BY
TR. BY	SCALE 1:1
CHK'D BY KP	DATE 11/21/14

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-12773

1