M-11582 | 3

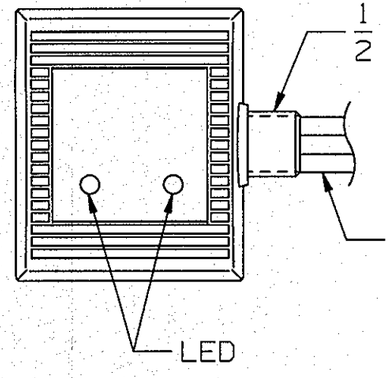

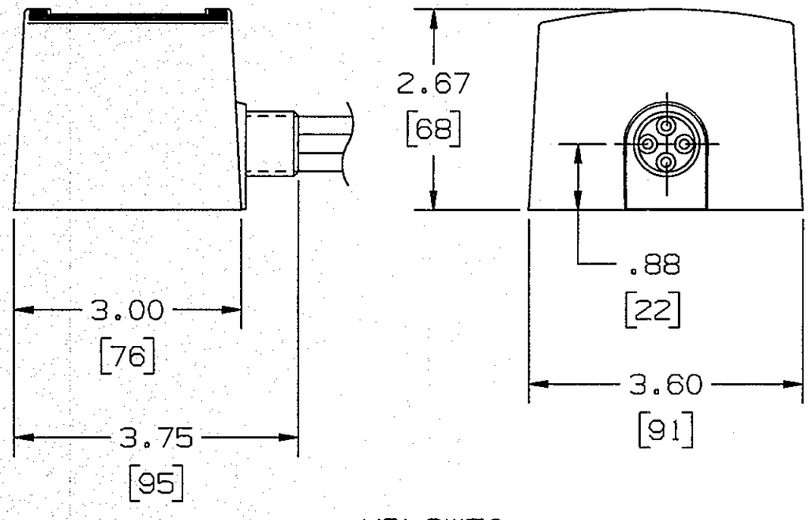

HBL3W50
SIDE NIPPLE

CATALOG NO.	VOLTAGE	NIPPLE
HBL3W50	120/240V	SIDE
~~HBL3W120~~	~~120/240V~~	~~SIDE~~
HBLSDSA36	120/240V	BACK
~~HBLSDSA40~~	~~347/600V~~	~~BACK~~
HBL4SA40	120/208V	BACK
HBL5SA40	240V	BACK
HBL8SA40	277/480V	BACK
HBL9SA40	480V	BACK
HBL10SA40	347/600V	BACK
HBL11SA40	600V	BACK

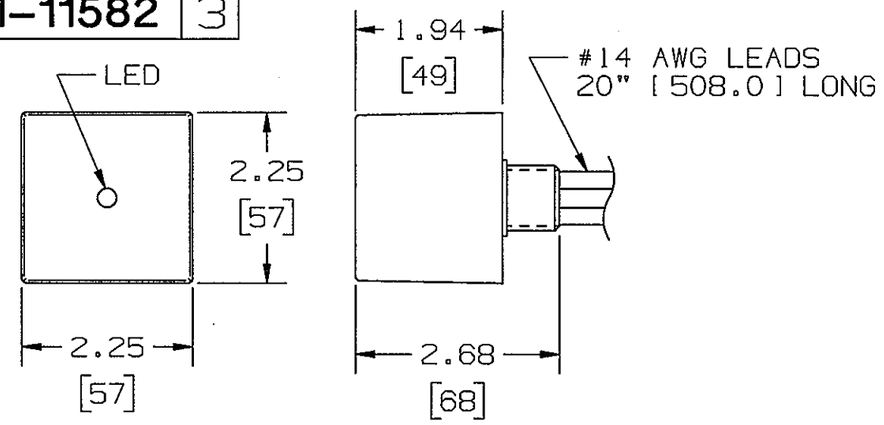

HBLSDSA36

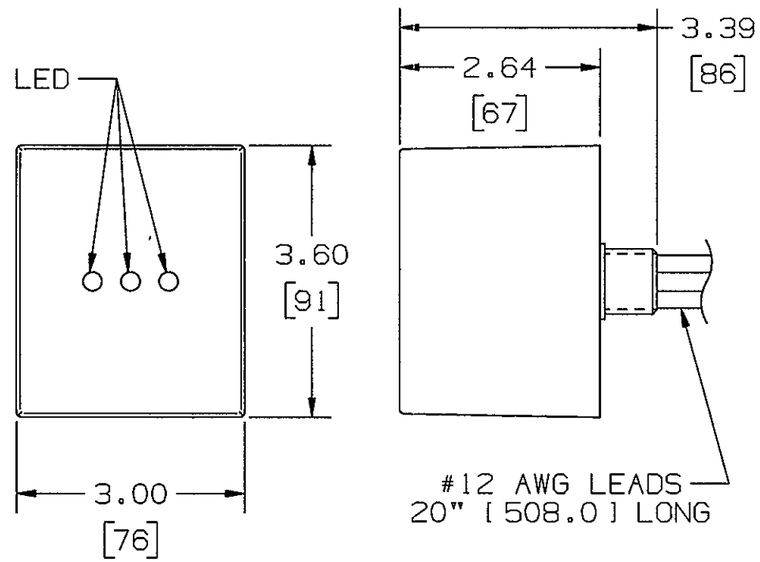

HBL_SA40 SERIES
BACK NIPPLE

NOTES: (UNLESS OTHERWISE SPECIFIED)

1) DIMENSIONS ARE: INCHES
[mm]

2) .XX TOLERANCES TO BE ±.03

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
ENCLOSURE	PLASTIC	BLACK

SYM	REVISIONS	APP	DATE
3	ADDED HBL_SA40 CATALOGS TO TABLE, ADDED HBL3W50 TO VIEW, HBL_SA40 WAS HBLSDSA40 CROSSHATCHED HBLSDSA40 IN TABLE PER DCN 21940. MYA	SL	4/7/16
2	INACTIVATED HBL3W120 CAT. NO.; ADDED LED TO VIEWS & CALLOUTS; ADDED WIRE SIZE CALLOUTS; ADDED ENCLOSURE TO LIST OF PARTS PER DCN 17835 RCM	DJP	6/26/11
1	RELEASE PER PRODUCTION DCN 16566 RCM	SL	4/19/10

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
SURGE PROTECTIVE DEVICE
TYPE 1

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX ± .01
.XXX ± .005
ANGLES ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY RCM	APP. BY SML
TR. BY	SCALE 1/2
CHK. BY SML	DATE 4/19/10

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-11582

3

CODE 74545