M-9738 | 4

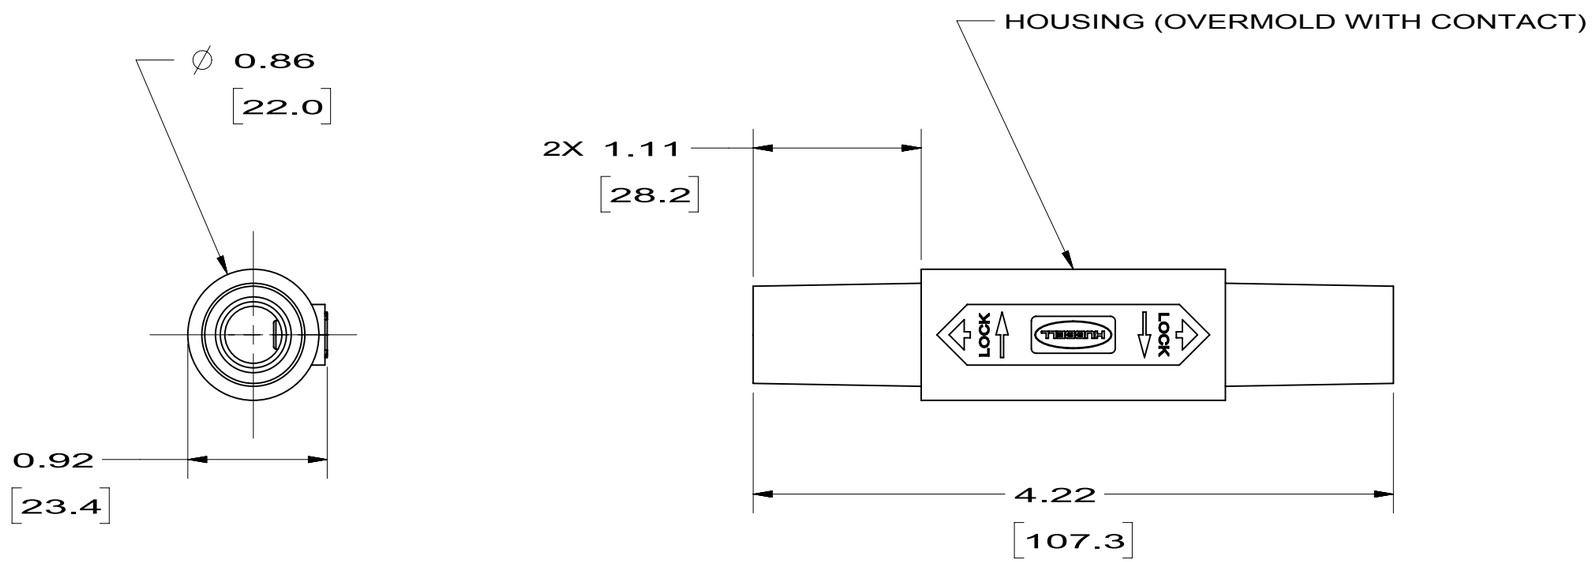

NOTES:
1. DIMENSIONS ARE INCHES ± .02
[mm] ± .5
2. RATING: 600V 150 AMP
3. UL/c-UL ENCLOSURE TYPES 3R, 4X, 12,

HUBBELL CAT. NO.	COLOR
HBL15DFGN	GREEN
HBL15DFW	WHITE

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	TPE	SEE TABLE
FEMALE CONTACT	BRASS	
RIVET	BRASS	

SYM	REVISIONS	APP	DATE
4	REVISED NOTE 2 FROM 600VAC/250VDC TO 600V PER DCN 23410 RGP	RGP	11/01/17
3	CHANGED CATALOG NO.'S FROM HBLDFGN15 TO HBL15.. CHNG DIM FROM 2X 1.05 TO 2X 1.11 [28.2] PER DCN 19979 CAC	CAC	7/23/13
2	REMOVE 5 COLORS PER DCN#19061 CAC	CAC	1/10/12
1	RELEASE FOR PRODUCTION PER DCN#12733 PJT	PJT	1/10/08

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 150A SINGLE POLE DOUBLE FEMALE

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY	PJT	APP. BY	TB
TR. BY		SCALE	1:1
CHK'D BY		DATE	1/10/06

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-9738

4

CODE 74545