M-10435 2

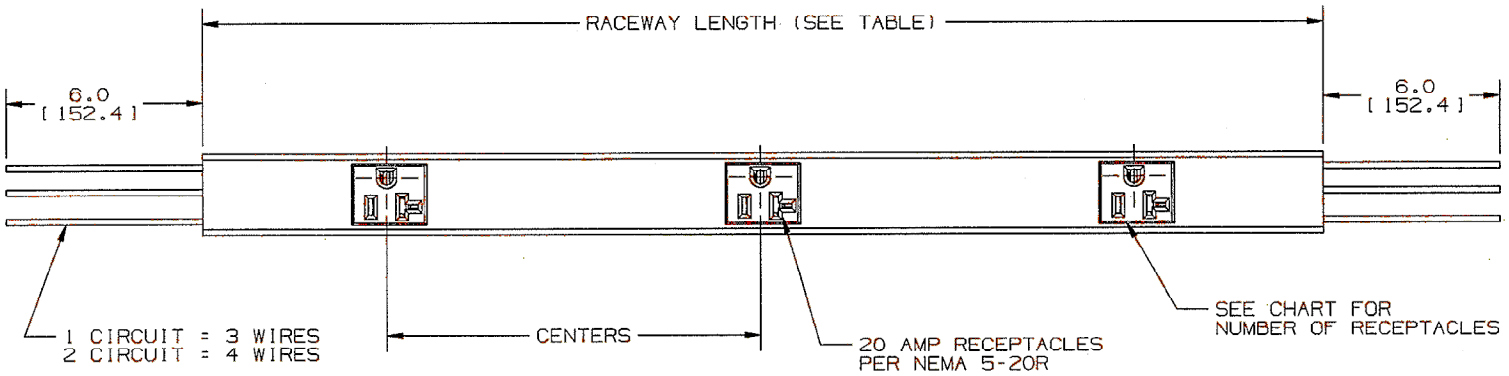



NOTES: 1) RECEPTACLES ARE LOCATED SYMMETRICALLY IN OVERALL LENGTH.
2) CONDUCTORS - #12 THHN STRANDED WIRE
3) "IV" SUFFIX CATALOG NUMBERS ARE IVORY
"GY" SUFFIX CATALOG NUMBERS ARE GRAY

NOTE: ALL DIMENSIONS IN INCHES AND [MM]

CATALOG NUMBER	1FT.	2FT.	3FT.	5FT.	6FT.	1 CIRCUIT	2 CIRCUIT	CENTERS	NUMBER OF RECEPTACLES
HBL24GB506IV & HBL24GB506GY				X		X		6.0IN.	10
HBL24GB512IV & HBL24GB512GY				X		X		12.0IN.	5
HBL24GBA512IV & HBL24GBA512GY				X			X	12.0IN.	5
HBL24GB606IV & HBL24GB606GY					X	X		6.0IN.	12
HBL24GB612IV & HBL24GB612GY					X	X		12.0IN.	6
HBL24GB618IV & HBL24GB618GY					X	X		18.0IN.	4
HBL24GBA612IV & HBL24GBA612GY					X		X	12.0IN.	6
HBL24GBA618IV & HBL24GBA618GY					X		X	18.0IN.	4
HBL24GB306IV & HBL24GB306GY			X			X		6.0IN.	6
HBL24GB108IV	X					X		8.0 IN.	2
HBL24GB206IV		X				X		6.0 IN.	4

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	STEEL	SEE NOTES
RECEPTACLES	PVC	-

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
2	ADDED CATS. HBL24GB108IV AND HBL24GB206IV. PER DCN 18458 SPN	DJP	11/7/11
1	RELEASED PER DCN13549	SRE	11/14/06

B

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE PLUGTRAK-METALLIC MULTI-OUTLET ASSEMBLIES 20AMP

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY SRE | APP. BY SRE
TR. BY | SCALE 1:1
CHK'D BY SRE | DATE 11/17/11

M-10435 2