M-6281 | 2

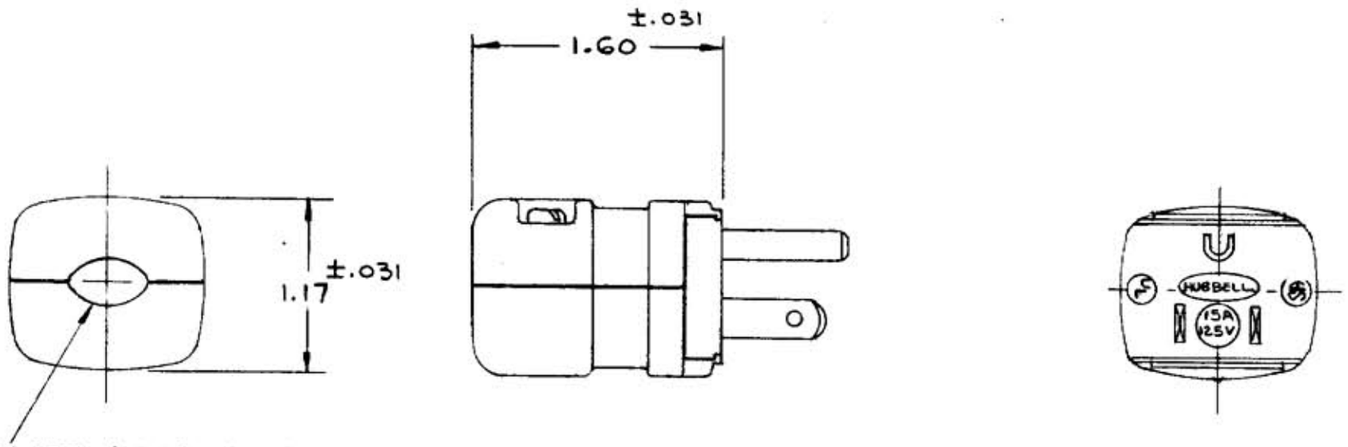

CORD CLAMPS ACCOMMODATE THE FOLLOWING:
8013-V — .300-.360 DIA. INSULATION
8015-V — .360-.575 DIA. INSULATION

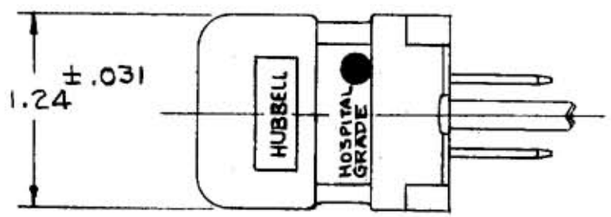

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	NYLON	WHITE
CONTACT BLADES	BRASS	1-WHITE
GR. CONTACT BLADE	BRASS	
CORD CLAMP SCR.	STEEL	ZINC PL.

SYM	REVISIONS	APP	DATE
2	ADDED CSA SYMBOL PER DCN #1549 JMCK	CB	11/20/92
1	DELETE FED. SPEC., & ADDED "UL" RATING & HUBBELL MARKING HOUSING FINISH WAS NAT DCN 1936	CB	9-28-92 AJL

TITLE
HOSPITAL GRADE 15A. 125V.
3-WIRE DEAD FRONT VALISE
PLUG WITH INSULATION
DISPLACEMENT TERMINALS

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°

HARVEY HUBBELL, INC.
BRIDGEPORT, CONN.

DR. BY A. J. L. | APP. BY D. L.
TR. BY | SCALE FULL
CHK'D. BY | DATE 1-29-82

DIMENSION SHEET FOR CAT. NO. 8013-V & 8015-V

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-6281

2

CODE 74545