M115131

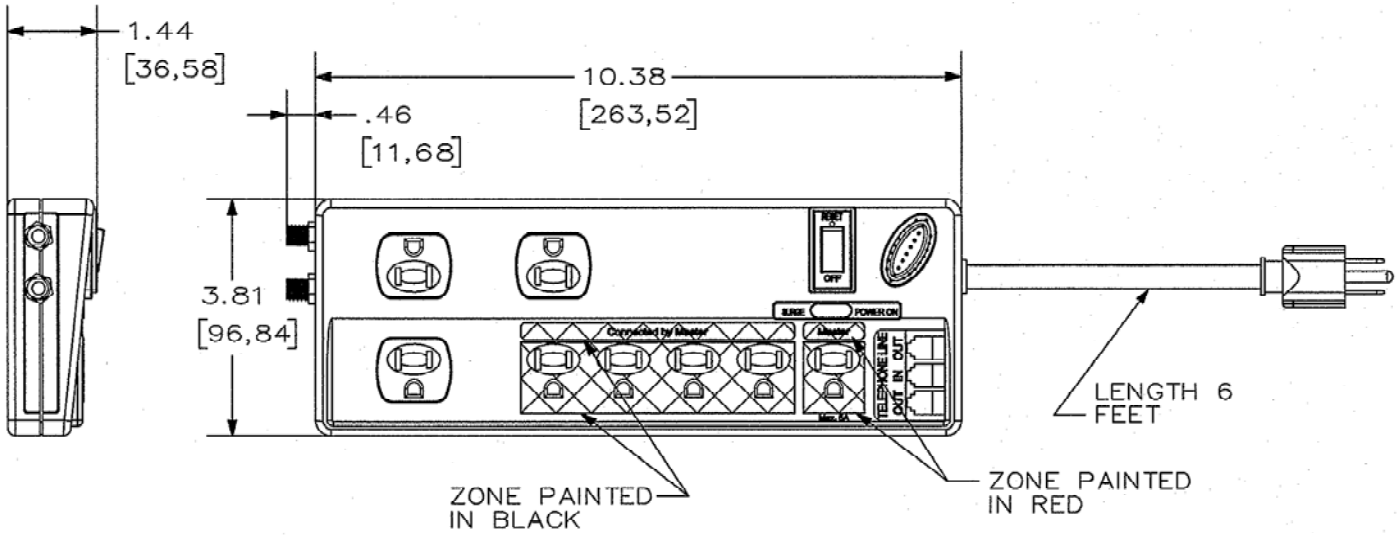

NOTES: (UNLESS OTHERWISE SPECIFIED)
1) DIMENSION ARE IN INCHES [mm].
2) ELECTRICAL RATINGS: 15A, 125V, 1875W.
3) UL VOLTAGE PROTECTION LEVEL: 400V.(L–N)
4) Inom.: 6kV, 3kA.
5) UL/c UL LISTED.
6) HBL8ESPS1050M PICTURED; HBL8ESPS1050C VERSION HAS CATV PROTECTION INSTEAD OF TELEPHONE PROTECTION.
7) JOULE RATING: 1,050J.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BASE	PLASTIC	WHITE

DIMENSION SHEET FOR CAT. NO. HBL8ESPS1050M, HBL8ESPS1050C

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
1	01/12/10 RELEASE TO PRODUCTION PER DCN 16208 DLI	SL	3-10-10

B

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

SPD–8 RECEPTACLE

M115131

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE–KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY DLI | APP. BY SL
TR. BY | SCALE 1:2
CHK'D BY SL | DATE 01/12/10

1

CODE 74545