M-13631 | 1

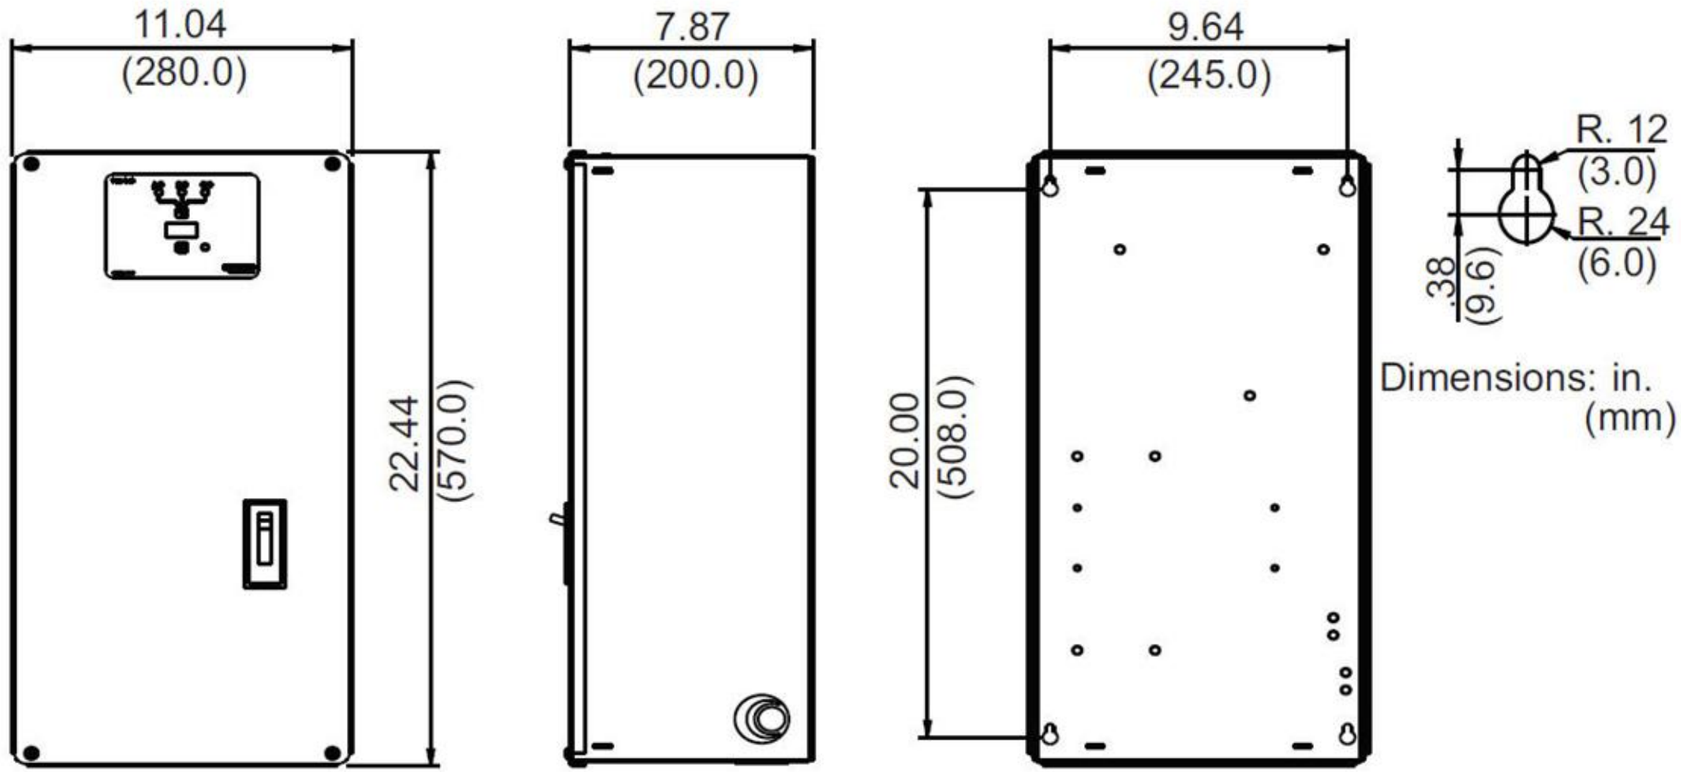

NEMA 1 ENCLOSURE

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. DIMENSIONS ARE INCHES
   (mm)
2. .XX TOLERANCES TO BE ±.03
3. #2 AWG TERMINALS
4. MAXIMUM SURGE CONTROL = 120kA/PHASE
   I_{NOM} = 20kA
   SCCR = 200kA

CAT. NO. *	VOLTAGE, PHASE
HBL3P320B	120/240V, 1PH
HBL4P320B	120/208V, 3PH
HBL5P320B	240V, 3PH
HBL6P320B	240/120V, 3PH
HBL7P320B	220/380V, 3PH
HBL8P320B	277/480V, 3PH
HBL9P320B	480V, 3PH
HBL10P320B	347/600V, 3PH
HBL11P320B	600V, 3PH

* DB SUFFIX DENOTES DISCONNECT OPTION

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH

WIRE LUG SIZE - #2 AWG

REV	DESCRIPTION	APP	DATE
1	NEW RELEASE PER DCN 23003. MYA	SL	5/18/17

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE

320K AMPS, TYPE 1 SPD PANEL

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX= ± .005
ANGLE TOL. ±2°

DR. BY	MALLEN	SCALE	NONE
CHK. BY	SL	DATE	5/18/17

DIMENSION SHEET FOR CAT. NO.
SEE TABLE

B

M-13631

1

CAGE CODE 74545