M-7242 | 5

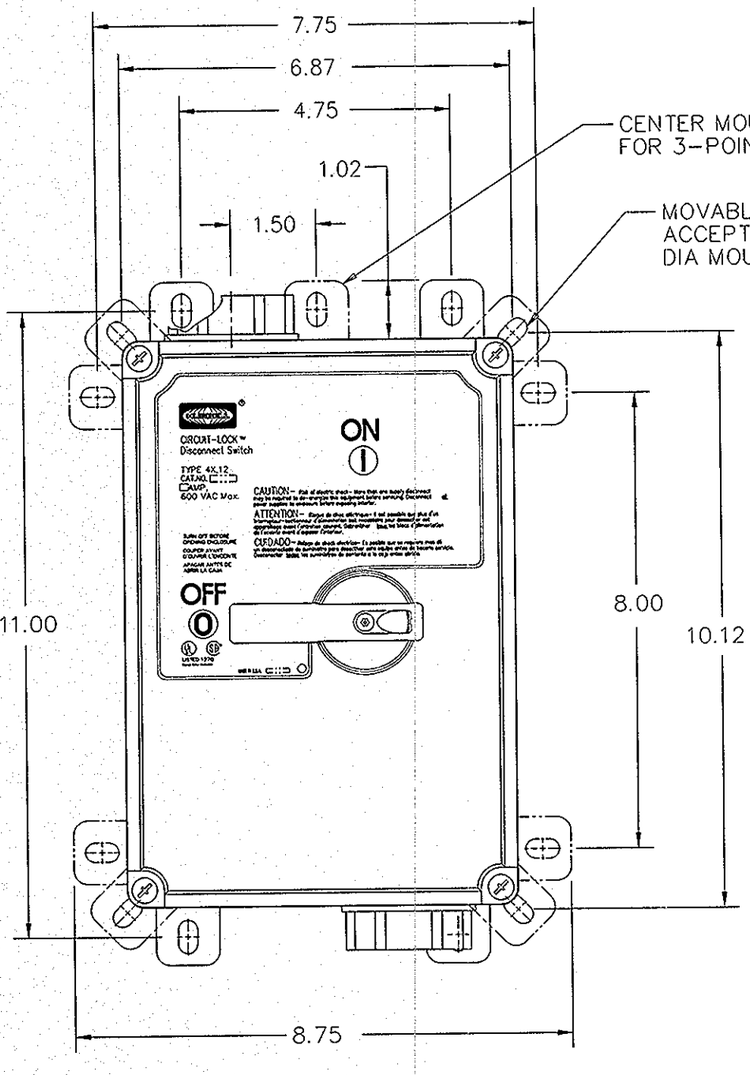


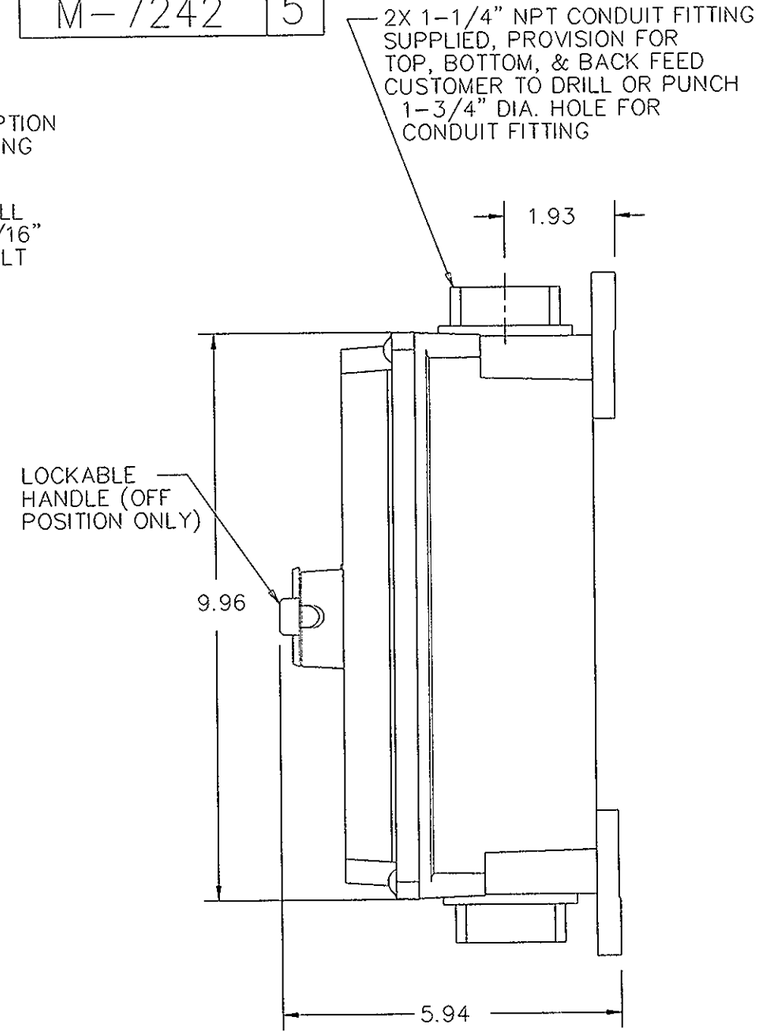


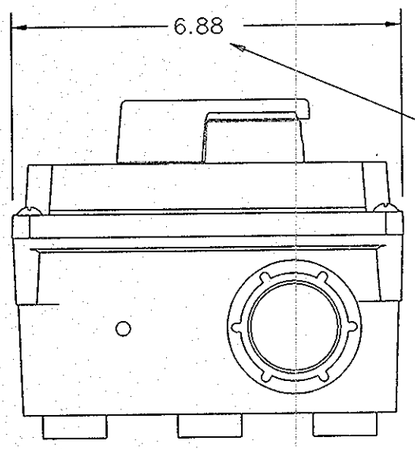


| CATALOG NO.'S | |
|---|---|
| HBLDS6<br>HBLDS6AC (AUXILIARY CONTACT) | |
| 60 AMP | 600 VAC |
| 7.5 HP (5.6kw) | 120 VAC 1 ø |
| 15 HP (11.19 kw) | 200-240 VAC 1 ø |
| 30 HP (22.37 kw) | 480 VAC 1 ø |
| 30 HP (22.37 kw) | 200-240 VAC 3 ø |
| 50 HP (37.28 kw) | 480 VAC 3 ø |
| 50 HP (37.28 kw) | 600 VAC 3 ø |

| CATALOG NO.'S | |
|---|---|
| HBLDS10<br>HBLDS10AC (AUXILIARY CONTACT) | |
| 100 AMP | 600 VAC |
| 7.5 HP (5.6kw) | 120 VAC 1 ø |
| 15 HP (11.19 kw) | 200-240 VAC 1 ø |
| 30 HP (22.37 kw) | 480 VAC 1 ø |
| 30 HP (22.37 kw) | 200-240 VAC 3 ø |
| 50 HP (37.28 kw) | 480 VAC 3 ø |
| 50 HP (37.28 kw) | 600 VAC 3 ø |

NOTES:
1. ENCLOSURE TYPE 4X & 12

CODE 74545

LIST OF PARTS

| DESCRIPTION | MATERIAL | FINISH |
|---|---|---|
| ALL EXTERNAL PLASTIC PARTS | UV STABILIZED POLYESTER BLEND | |
| ALL EXTERNAL SCREWS | STAINLESS STEEL | |
| THREADED HUB | DIE CAST | |
| INSULATED THROAT | ZINC | |



CATALOG NO. HBLDS6
(NOT SHOWN TO SCALE)

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☐

| SYM | REVISIONS | APP | DATE |
|---|---|---|---|
| 5 | ADDED ISO VIEW TO INDICATE SOLID MODEL DRAWING PER DCN 21895 DDL | DJP RJP | 02/26/16 |
| 4 | REVISED TABLE; HP & VOLTAGE REVISED PER DCN #13625 RCM | TLS | 1/26/07 |
| 3 | TITLE RELOCATED ON NEW BORDER FORMAT TABLE UPDATE TO INCLUDE 100A PER DCN #3012 RCM | PJT | 9/14/94 |
| 2 | NEW DRAWING RELEASED FOR PRODUCTION PER DCN # 2837. JMN PJT | | 5/24/94 |
| 1 | "X" REMOVED; LAST X-REVISION WAS X-1 PER EC #2591-1. JMN | | 4/13/94 |

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
DIMENSION SHEET FOR
60A & 100A CIRCUIT LOCK™
DISCONNECT SWITCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX = ± .005
ANGLES = ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

| | |
|---|---|
| DR. BY JMN | APP. BY PJT |
| TR. BY | SCALE NONE |
| CHK'D BY PJT | DATE 3/23/94 |

M-7242 B 5