M-11782 | 1

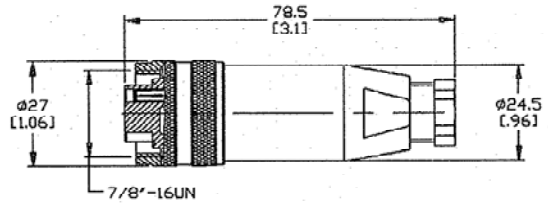

DIMENSIONS IN INCHES.[mm]



WIRE STRIP LENGTH

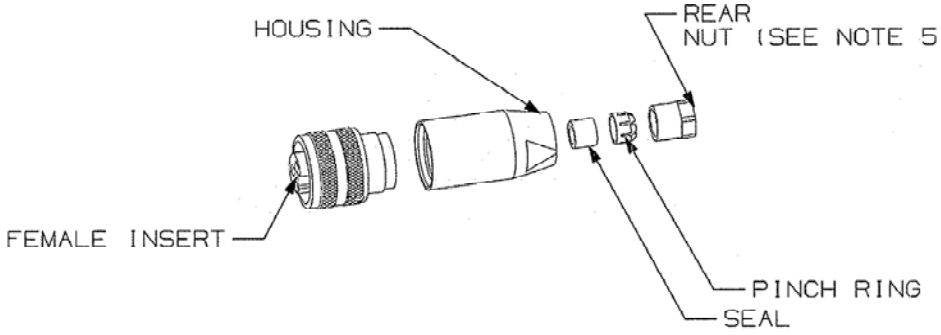

Female

3 POLE

Female

4 POLE

Female

5 POLE

NOTES: UNLESS OTHERWISE SPECIFIED:

1. WIRE SIZE: 16AWG (1.5mm²) MAX.
2. ENCLOSURE RATING: IP67
3. OPERATING TEMPERATURE: -40° C TO 85° C.
4. c UL us RECOGNIZED.
5. RECOMMENDED REAR NUT TORQUES
   F9 STYLE - 7-8 IN.LBS (80-100 Ncm)
6. RECOMMENDED TERMINAL TORQUE
   4.42 IN.LBS (50Ncm)

CATALOG NO.	POLES	RATING	CABLE RANGE
HCMS03F9	3	250V/12A	0.24-0.32 IN.
HCMS04F9	4	250V/9A	0.24-0.32 IN.
HCMS05F9	5	250V/9A	0.24-0.32 IN.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
COUPLING NUT	ALUMINUM	BLACK ANODIZE
CONNECTOR SHELL	PBT	BLACK
CONTACTS	BRASS	GOLD PLATED

SYM	REVISIONS	APP	DATE
1	12/1/10 NEW RELEASE PER DCN 17341 CAC	CAC	

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE STRAIGHT FEMALE MINI-QUICK F9 FIELD ATTACHABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY CAC | APP. BY CAC
TR. BY | SCALE NONE
CHK'D BY | DATE 12-2-10

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☒ NON-REPAIRABLE ☐

B

M-11782

1