M-8201 3

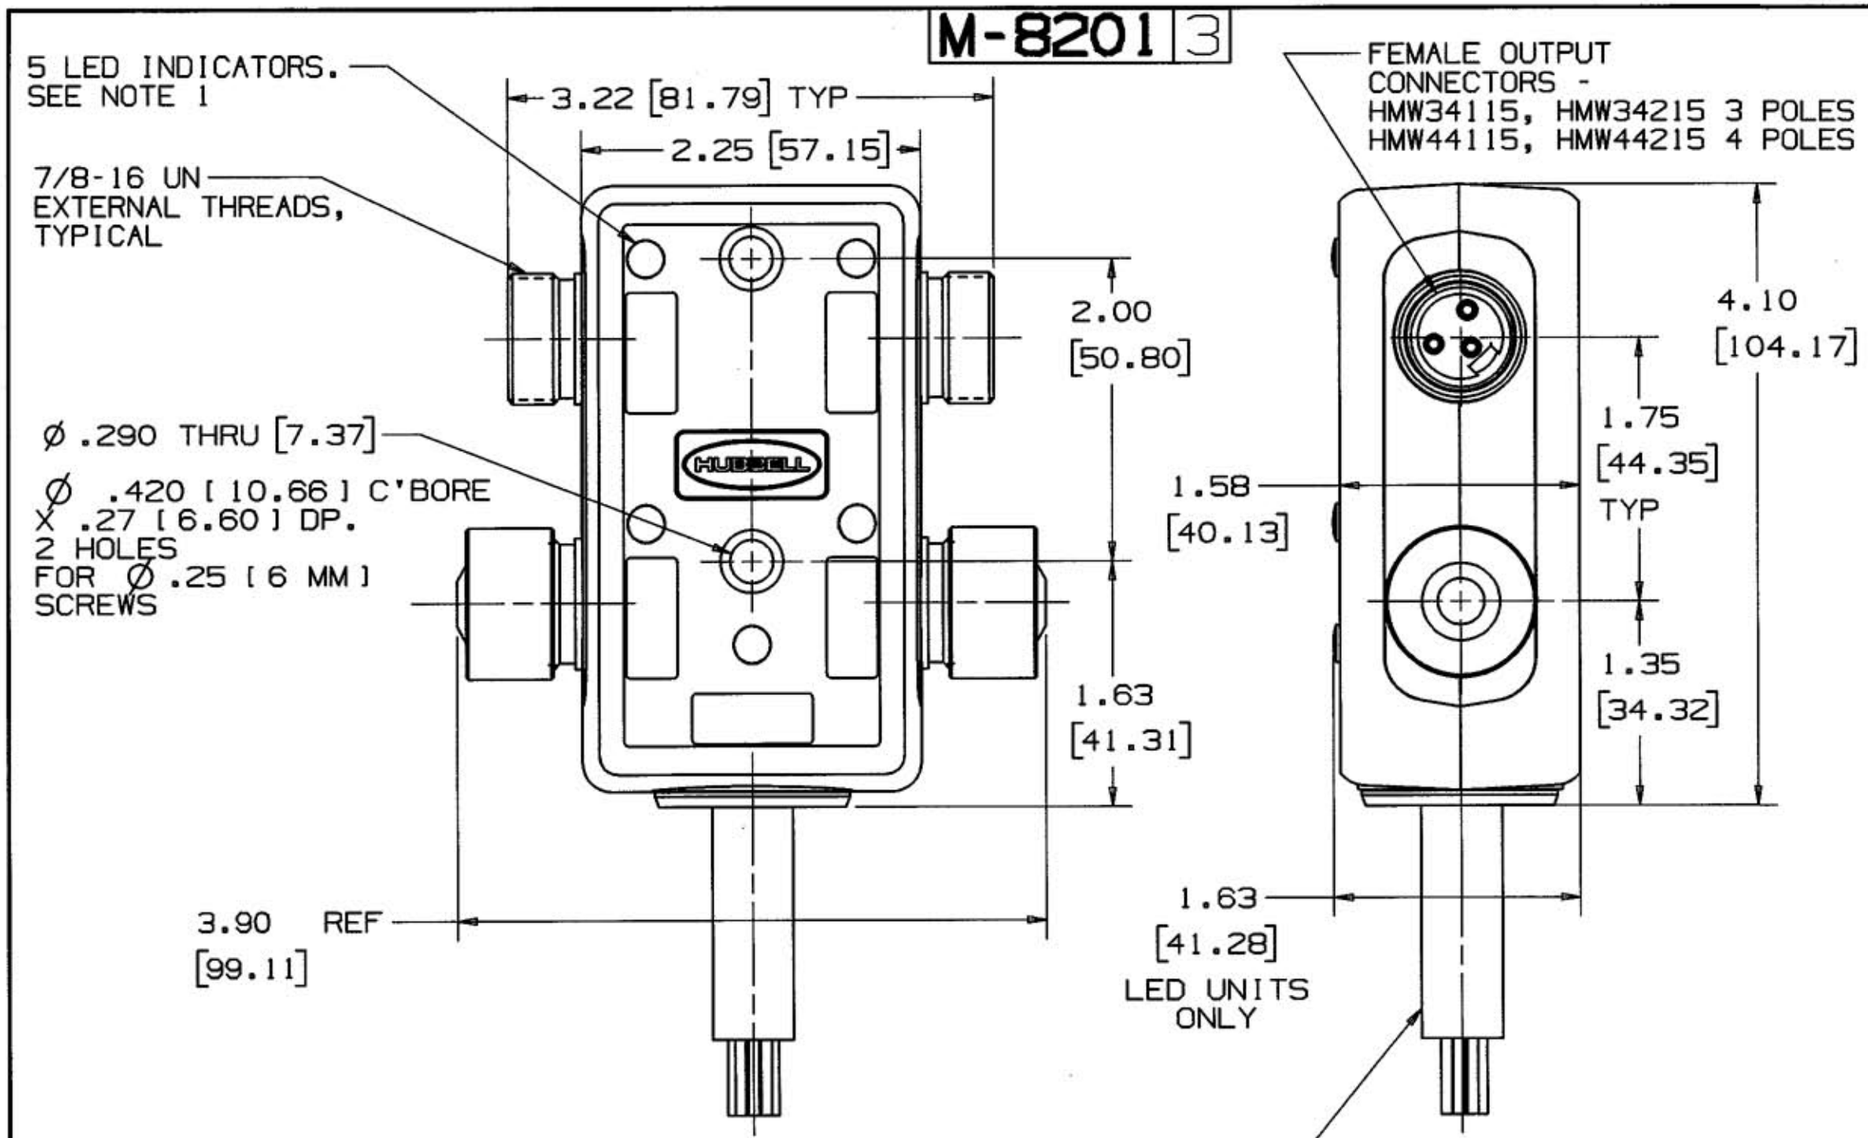

NOTES-UNLESS OTHERWISE SPECIFIED:

1. MODEL SHOWN - HMW34115. HMW34215, HMW44115, HMW44215 ARE IDENTICAL EXCEPT: NUMBER OF PINS ON OUTPUT CONNECTORS, SIZE/CONFIGURATION OF INPUT CORD; HMW34215 & HMW44215 HAVE NO LEDS.
2. HOUSING COLOR - BLACK.
3. KNURLED, THREADED CAPS PROVIDED AS SHOWN, ALL OTHER PORTS SUPPLIED WITH SHIPPING CAPS ONLY.
4. DIMENSIONS ARE IN INCHES & [MILLIMETERS].

CATALOG NUMBER	RATING	LED'S	CIRCUITRY
HMW34115	10 AMPS, 120 VAC/DC MAX	YES	PNP
HMW44115	10 AMPS, 120 VAC/DC MAX	YES	PNP
HMW34215	10 AMPS, 600 VAC/DC MAX	NO	PNP
HMW44215	10 AMPS, 600 VAC/DC MAX	NO	PNP

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	RIGID PVC	---
PORT CONNECTIONS	BRASS	NICKEL PLATED
INPUT CORD	PVC JACKET	---
OUTPUT INSULATORS	NYLON	---

SYM	REVISIONS	APP	DATE
3	RATINGS FOR HMW34215 & HMW44215 WERE 120VAC/DC MAX, PER DCN10068	SRE	7/30/02
2	ADDED HMW34215 & HMW44215 PER DCN9201	SRE SRE	3/27/02
1	RELEASED PER DCN 8914	SRE SRE	8/28/01

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE SIGNALPLEX™ PORT
HMW34115, HMW44115,
HMW34215, HMW44215

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY SRE | APP. BY
TR. BY | SCALE NONE
CHK'D BY | DATE 8/9/01

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-8201

(W)