M-9563 | 4

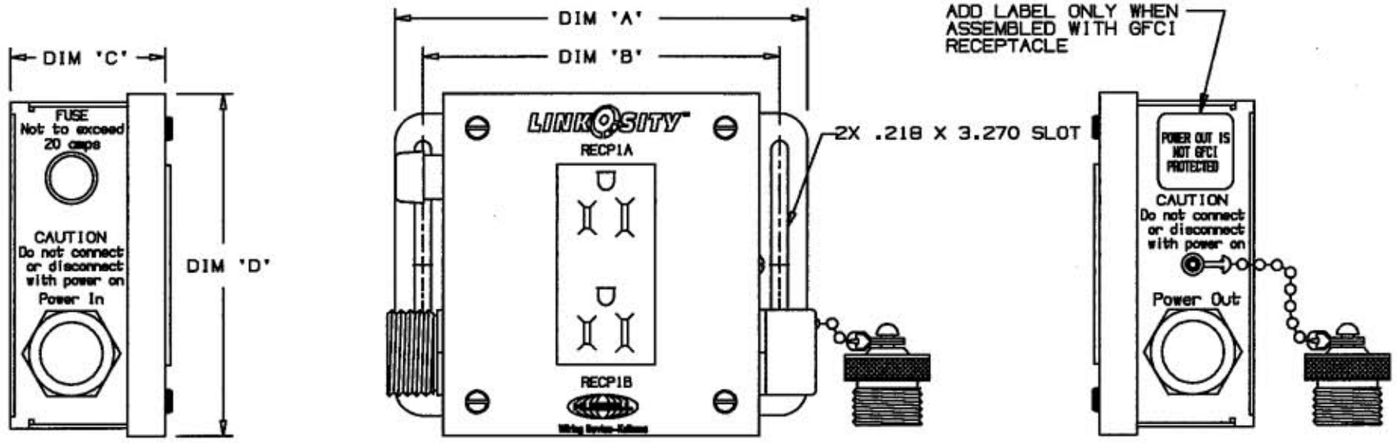

CATALOG NUMBER M001••••P SHOWN

CAT. NUMBER [1]	RECEPTACLES	DIMENSION 'A'	DIMENSION 'B'	DIMENSION 'C'	DIMENSION 'D'
M001••••P	1	5.50 [139.7]	4.75 [120.7]	2.25 [57.2]	4.53 [115.1]
M002••••P	2	7.50 [190.5]	6.75 [171.5]	2.25 [57.2]	4.53 [115.1]
M003••••P	3	9.50 [241.3]	8.75 [222.3]	2.25 [57.2]	4.53 [115.1]
M004••••P	4	11.50 [292.1]	10.75 [273.1]	2.25 [57.2]	4.53 [115.1]
M005••••P	5	13.50 [342.9]	12.75 [323.9]	2.25 [57.2]	4.53 [115.1]

NOTES:
1. DIMENSIONS ARE IN INCHES & [MM].
2. ALL DEVICES ARE UL LISTED.
3. ENCLOSURES RATING: TYPE 1.
4. DEVICES WITH ISOLATED GROUND RECEPTACLES HAVE INSULATED CONTINUOUS CONDUCTOR TO RECEPTACLE ISOLATED GROUND TERMINAL ORIGINATING FROM WN4, OTHERWISE A CONTINUOUS CONDUCTOR TO GROUND TERMINALS ORIGNATE FROM WN3 .
5. LINKOSITY™ IS A TRADEMARK OF LOCKHEED MARTIN.
6. DO NOT USE GFCI RECEPTACLES WITH LED'S & GFCI RECEPTACLES WITHOUT LED'S IN THE SAME PSDA.

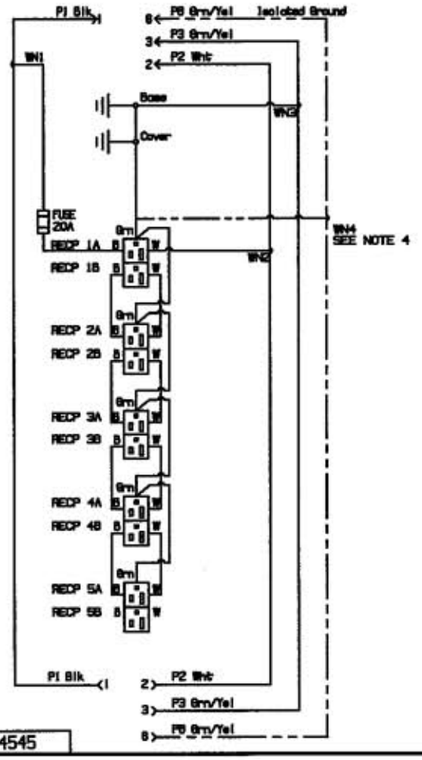

CODE 74545

CATALOG NUMBER

M [1] 00 [2] * [3] ** [4] ** P

- CONSTANT VALUE "M" [1]
- SWITCH TYPE [2]
- NUMBER OF RECEPTACLES [3]
- RECEPTACLE TYPE [3]
- RECEPTACLE FEATURE [4]
- PASS-THRU

[2] Switch Type	
SL = Local On/Off	HBL1221PL
ML = Master On/Off	HBL1221PL
00 = No Switch	N/A

		[3] Receptacle Type				
		CR Corrosion Resistant	HG Hospital Grade	SG Specification Grade	L1 NEMA L5-15R Twist Lock	L2 NEMA L5-20R Twist Lock
4 Receptacle Feature	00 Standard	HBL53CM62	HBL8300GY	CR5362GY	HBL4700	HBL2310
	IG Isolated Ground	N/A	IG8300GY	CR5362IGGY	IG4700A	IG2310
	GF Ground Fault	N/A	GF8300GYA	[6] GFR5352GYL or GF20GYL	N/A	N/A
	SI Surge Suppression Isolated Ground	N/A	IG8362GYSA	IG5352GYSA	N/A	N/A
	SS Surge Suppression	N/A	HBL8362GYSA	HBL5362GYSA	N/A	N/A

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH

SYM	REVISIONS	APP	DATE
4	GFR53520YL, WAS "GFR53520YA" ADD "OR GF20GYL" ADD NOTE 6, "DO NOT USE GFCI RECEPTACLES WITH LED'S & GFCI RECEPTACLES WITHOUT LED'S IN THE SAME PSDA." DCN 13548 GPK CH	CH	1/8/07
	ADDED "CAUTION..." PAD PRINTING. REMOVED "PL1" FROM "POWER IN" PRINTING. REMOVED "RECP6" FROM "POWER OUT" PRINTING. "FUSE" PRINTING WAS "FU1". RELOCATED "FUSE..." PRINTING ABOVE THE FUSE. ADDED "...GFCI..." LABEL. REMOVED "PL1" & "RECP 6" FROM SCHEMATICS. "FUSE" WAS "FU1" ON SCHEM. "WN4 SEE NOTE 4" WAS "WN4". CAT. NO. "GFR53520YA" WAS "CR53520YA"		
3	PER DCN # 12890.	WRV	10/28/05
2	RECEPTACLE TYPE TABLE, COLUMN TITLE L1 WAS 15, L2 WAS 20 PER DCN 12328 SPN	JPP	4/28/05
1	RELEASED PER DCN 12049. MYA	RDK	10/21/04

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

20A PSDA W/PASS THRU

TOLERANCES UNLESS OTHERWISE SPECIFIED
~~FRACTIONS ± 1/64~~
~~DECIMALS ± .005~~
~~ANGLES ± 2°~~

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY MYA	APP. BY RDK
TR. BY	SCALE NONE
CHK'D BY RDK	DATE 10/21/04

DIMENSION SHEET FOR CAT. NO.

REPAIRABLE ☐ NON-REPAIRABLE ☐

B

M-9563

4