M-11791 | 1



DIMENSIONS ARE INCHES [mm]



WIRE STRIP LENGTH

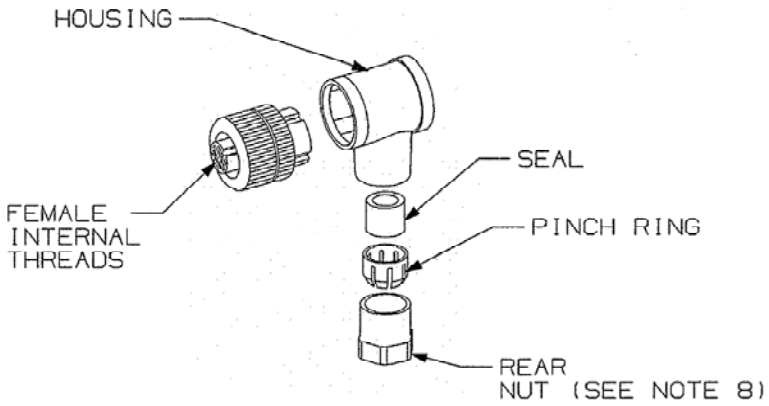

FACE VIEW 3P

Female

PIN OUT AND COLOR CODE

1 GREEN
2 RED/BLACK TR
3 RED/WHITE TR

NOTES: UNLESS OTHERWISE SPECIFIED:

1. WIRE SIZE: 18AWG (0.75mm²) MAX.
2. ENCLOSURE RATING: IP67
3. OPERATING TEMPERATURE: -40° C TO 90° C.
4. c UL us RECOGNIZED.
5. RECOMMENDED REAR NUT TORQUES
   F7 STYLE - 7-8 IN.LBS (80-100 Ncm)
   F9 STYLE - 7-8 IN.LBS (80-100 Ncm).
6. RECOMMENDED TERMINAL TORQUE
   3.54 IN.LBS (40Ncm)

CATALOG NO.	POLES	RATING	CABLE RANGE
MCMA23F7	3	250V/4A	0.16-0.24 IN.
MCMA23F9	3	250V/4A	0.24-0.32 IN.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
COUPLING NUT	BRASS	NICKEL PLATED
CONNECTOR SHELL	NYLON	BLACK
CONTACTS	BRASS	GOLD PLATED
		PALLADIUM
		NICKEL

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☒ NON-REPAIRABLE ☐

B

M-11791

1

SYM	REVISIONS	APP	DATE
1	12/1/10 NEW RELEASE PER DCN 17341 CAC		

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE ANGLED FEMALE MICRO QUICK THD. TYPE F7, F9

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY CAC	APP. BY
TR. BY	SCALE NONE
CHK'D BY	DATE 12-2-10