M-8994

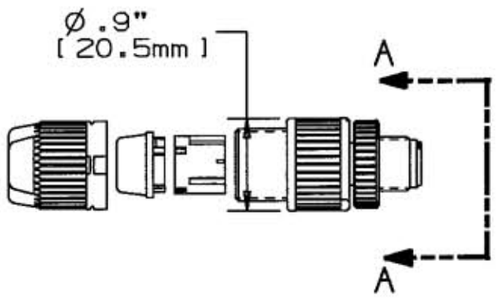



VIEW A
3 POLE
CAT#
MIMS13IDCL



VIEW A
4 POLE
CAT#
MIMS14IDCL

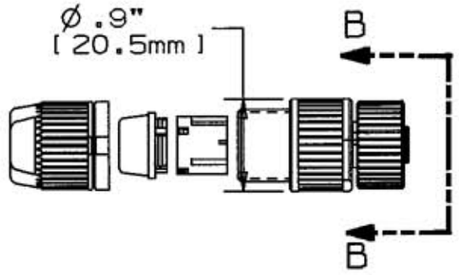



VIEW B
3 POLE
CAT#
MCMS13IDCL



VIEW B
4 POLE
CAT#
MCMS14IDCL

CABLE
DIA. RANGE:
.216-.315"
(5.4-8.0mm)

MALE CONNECTOR

CATALOG NUMBERS:
MIMS13IDCL & MIMS14IDCL ONLY

CABLE
DIA. RANGE:
.216-.315"
(5.4-8.0mm)

FEMALE CONNECTOR

CATALOG NUMBERS:
MCMS13IDCL & MCMS14IDCL ONLY

CATALOG NUMBER	WIRE RANGE (AWG)		VOLTAGE	AMPS	NUMBER OF POLES	THREAD SIZE
	MAX.	MIN.				
MIMS13IDCL	18	22	50	6	3	M12
MCMS13IDCL	18	22	50	6	3	M12
MIMS14IDCL	18	22	50	6	4	M12
MCMS14IDCL	18	22	50	6	4	M12

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	POLYESTER	
WIRE GUIDE	NYLON	
STRAIN RELIEF BUSHING	NEOPRENE	
CONTACT	COPPER ALLOY	TIN OVER NICKEL
COUPLING NUT	ZINC ALLOY	NICKEL
CABLE NUT	ZINC ALLOY	NICKEL
O-RING	NEOPRENE	

SYM	REVISIONS	APP	DATE
1	2/14/03 RELEASED PER DCN #10417	RDK	2/14/03

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

IDC FIELD ATTACHABLE, M12L, 3 AND 4 POLE

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY JDK	APP. BY RDK
TR. BY	SCALE N/A
CHK'D BY RDK	DATE 11/05/02

DIMENSION SHEET FOR CAT. NO.

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-8994